

## 插拔式端子台 Plug-In terminal block

### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


#### DB2EKB-3.5

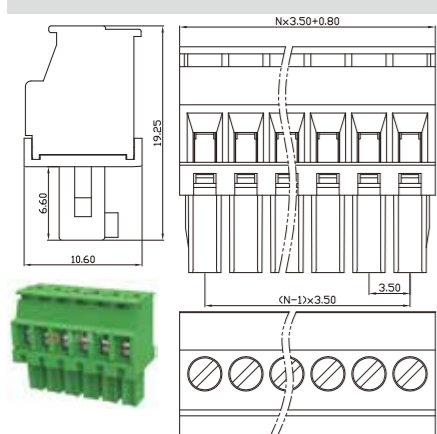


#### DB2EKAM-7.62

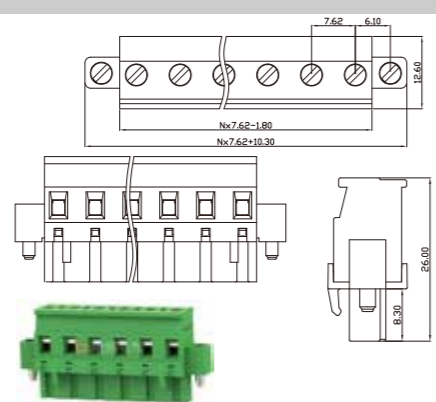


#### DB2EKAM-7.5

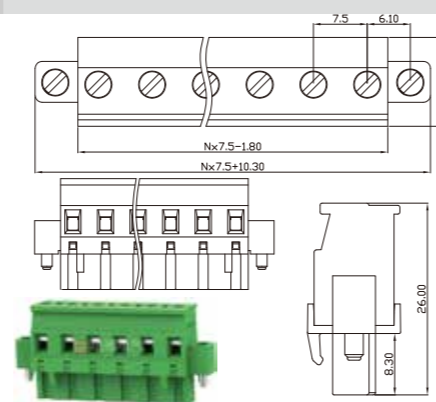


#### DB2EKAM-3.5

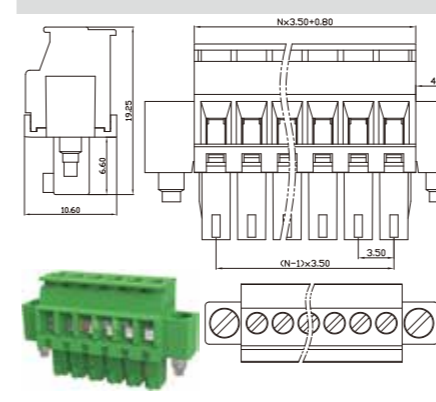

#### DB2EKA-7.62

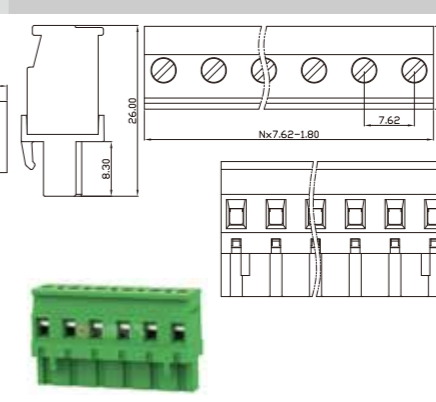

#### DB2EKA-7.5

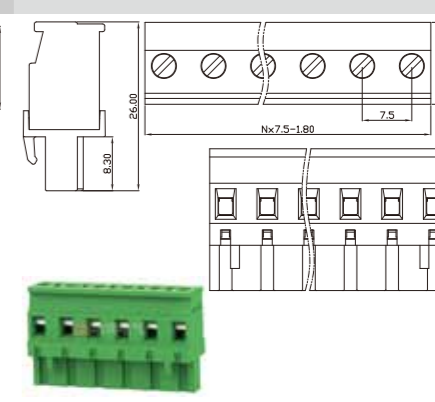

### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


### UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


#### DB2EKAM-5.08

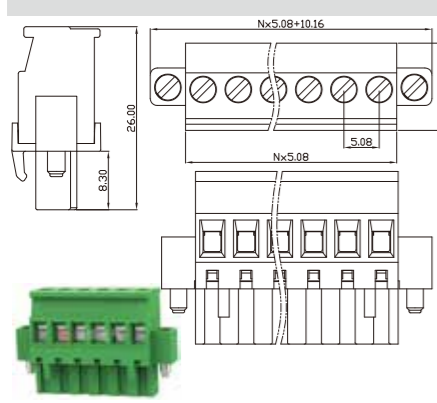


#### DB2EKAM-5.0

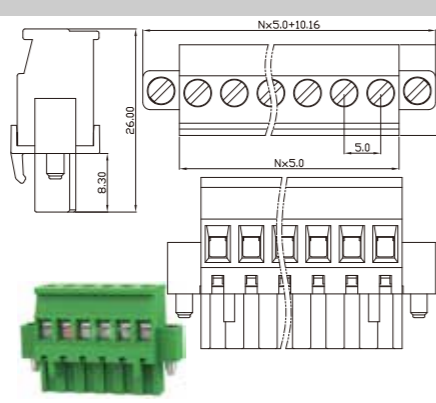


#### DB2EKAM-3.81

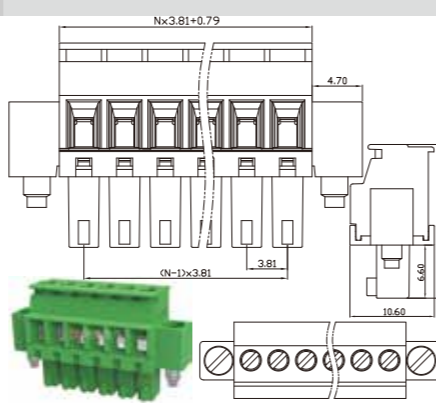


#### DB2EKA-5.08

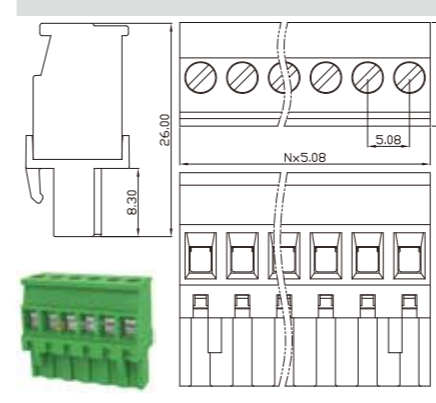

#### DB2EKA-5.0

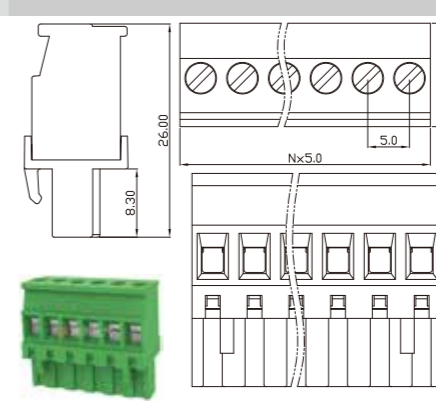

#### DB2EKA-3.81

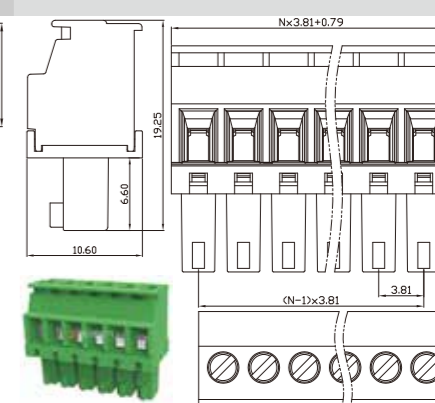




## 插拔式端子台 Plug-In terminal block

## 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4		

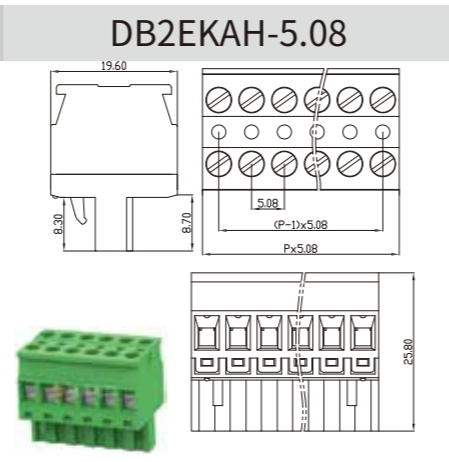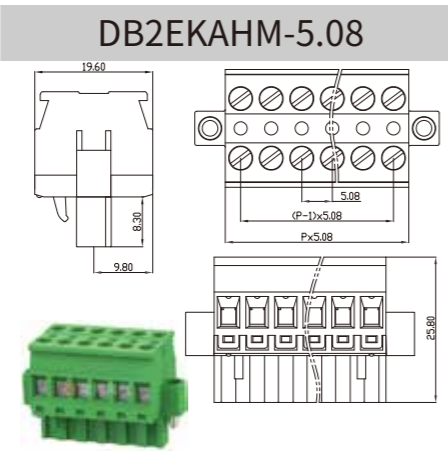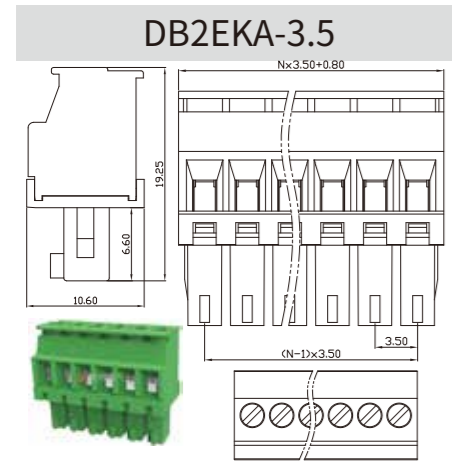

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

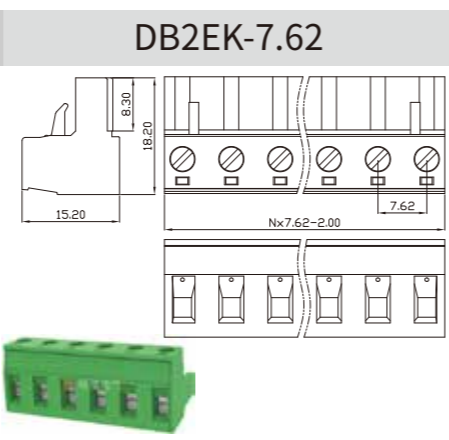
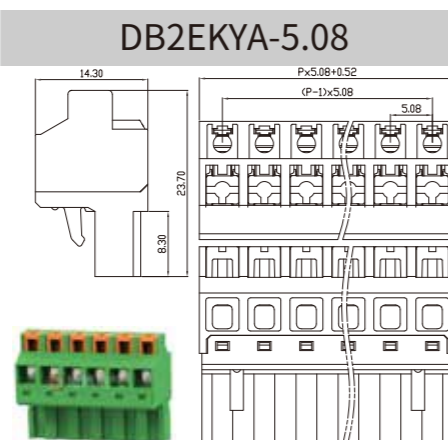
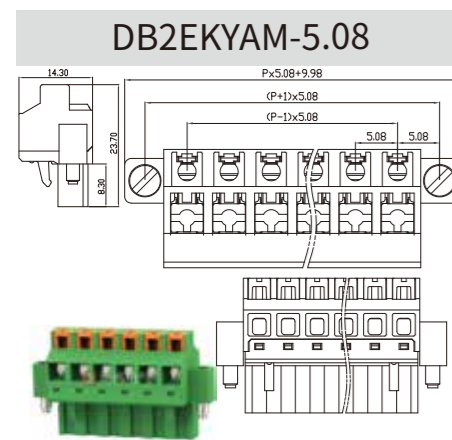


## 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

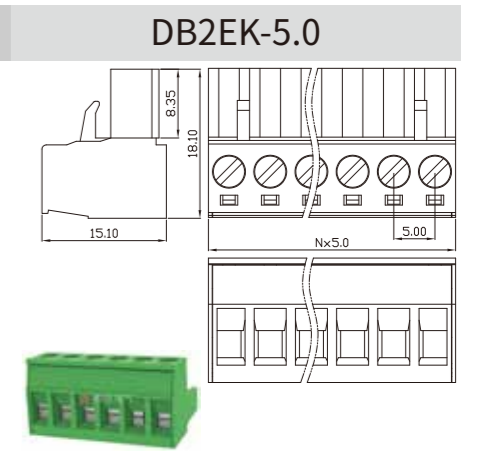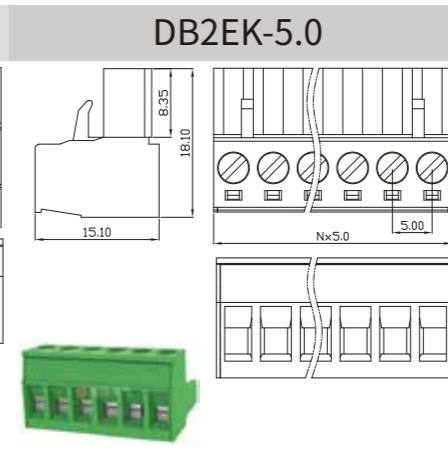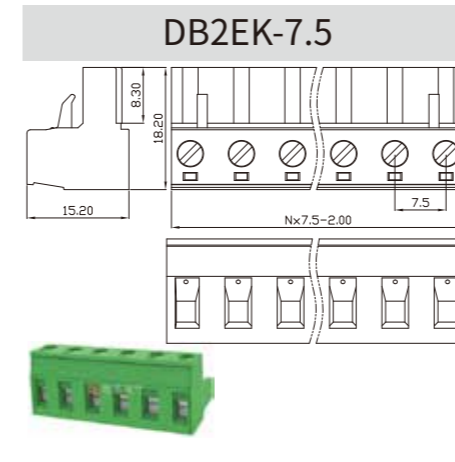

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	50	-	-
接线范围 Wire Range	26-20		
单/多芯线 Solid/Stranded [AWG]	26-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M1.6/0.1		

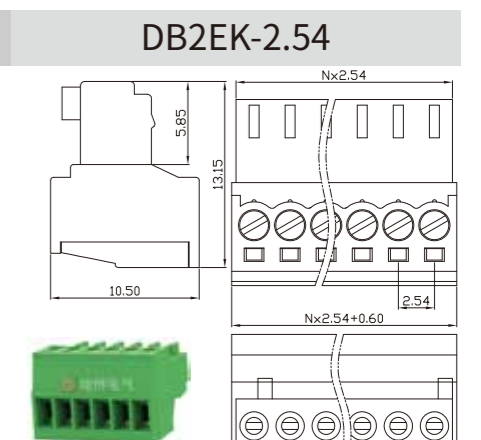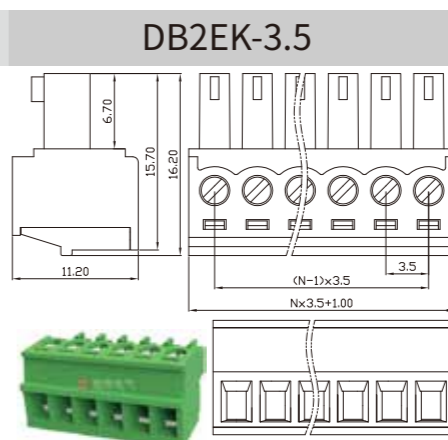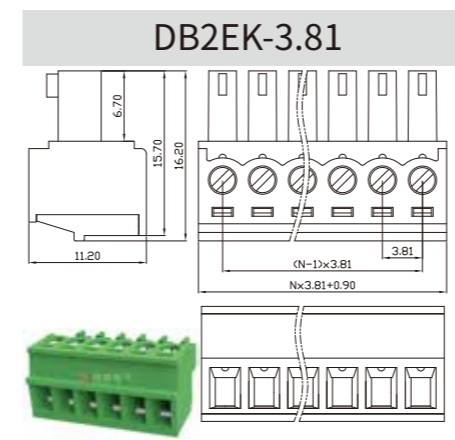


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	8	-	额定电流 Rated Current [A]	7	-	7	额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range				接线范围 Wire Range	24-14			接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	3.5			间距 Pitch [mm]	5.0			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]				螺丝 Screw/扭矩 Torque(Max) [N.m]				螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4		

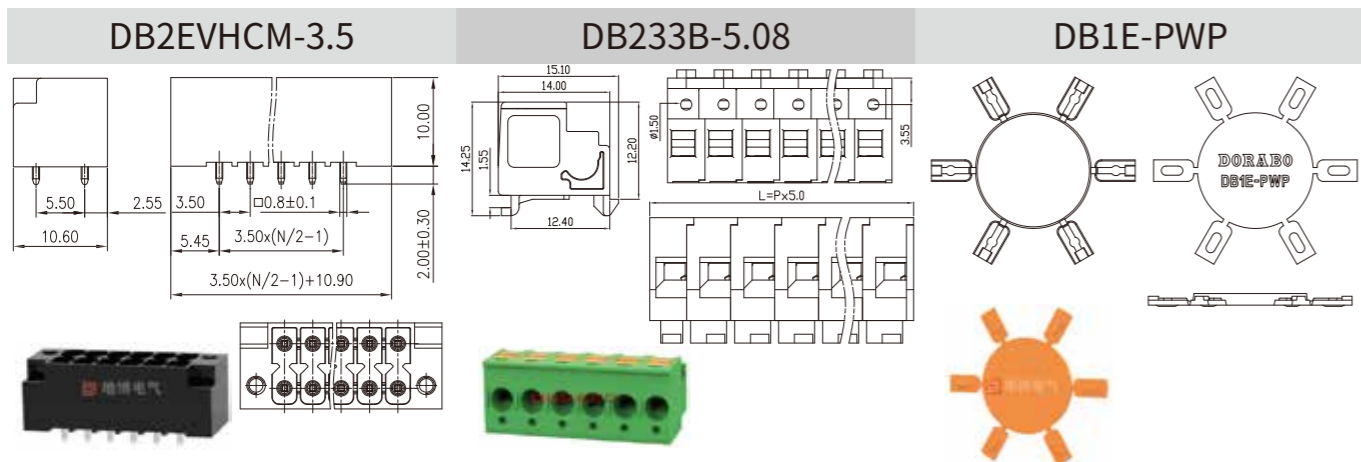


# 升降式端子台 Lifting terminal block

Fixed connectors can easily and safely transmit signals, data, and power to printed circuit boards. They are not only applicable to numerous fields in various industries, but also It can also be used in Industry 4.0 applications. Our COMBICON product range, which is applicable to all product families, offers both metric and English needle pitches, including 2.5 mm pin pitch micro terminal base to 20 mm pin pitch power module wiring terminal. The product design complies with international standards such as IEC60998 and UL1059. Has obtained UL certification in the United States.

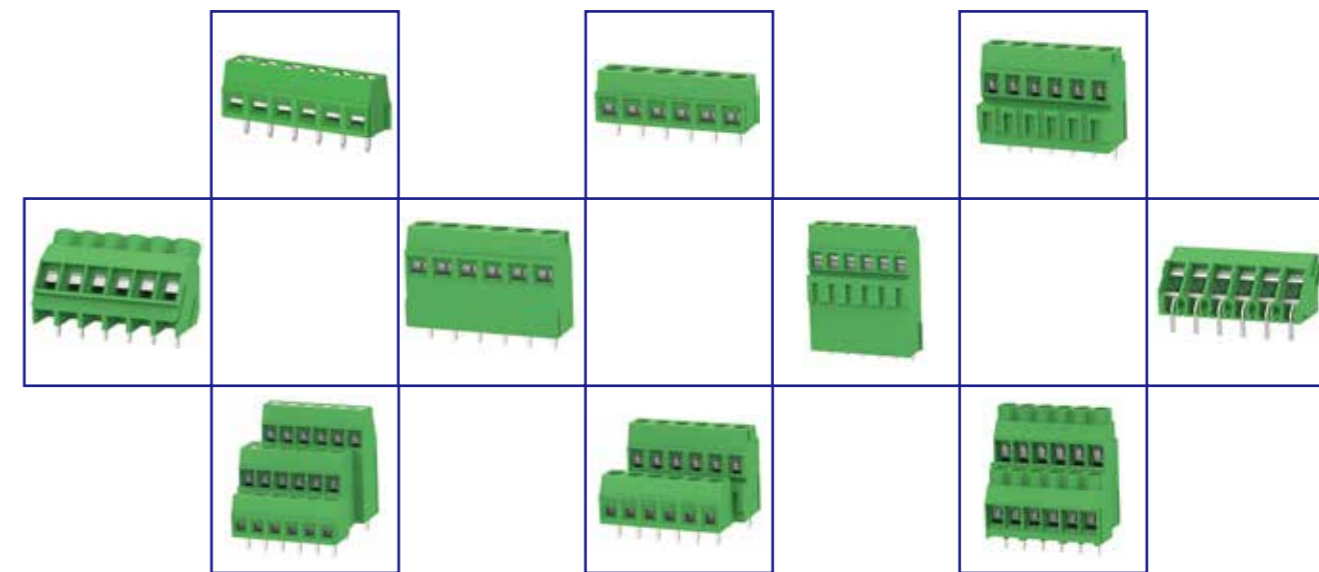

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	28-16			接线范围 Wire Range	28-16			接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.5			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

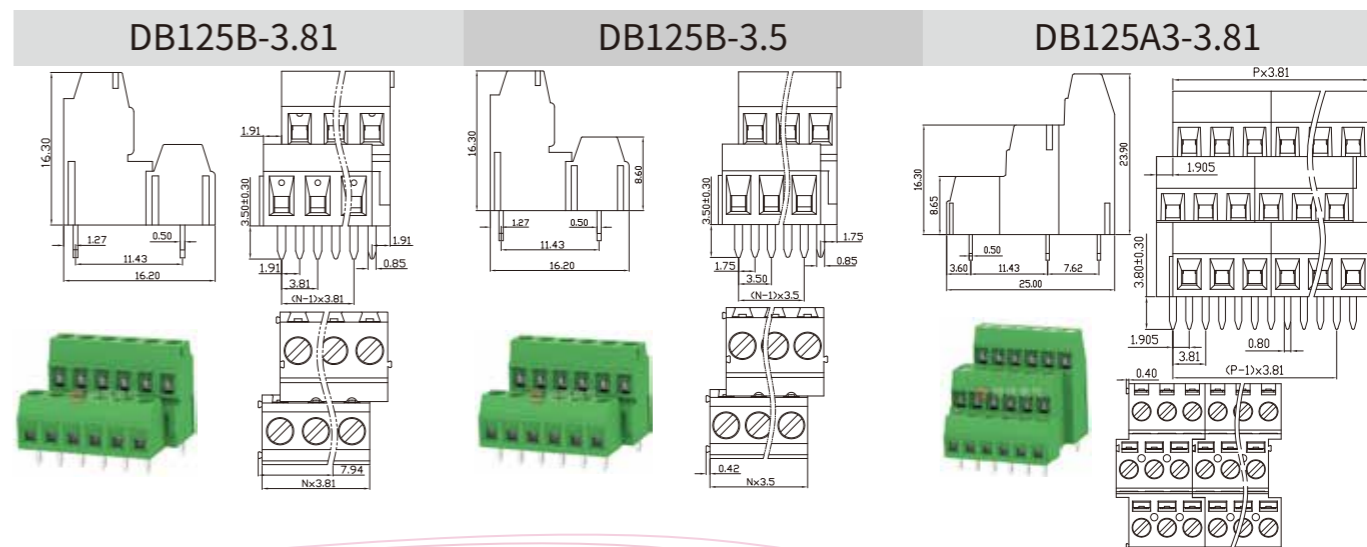


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


DB125A-3.81

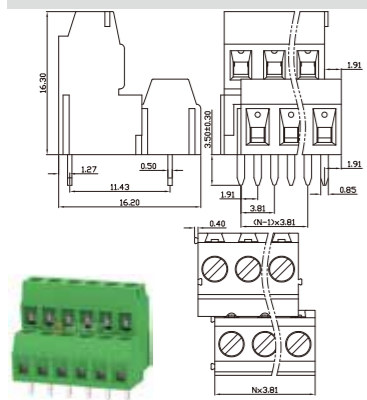

DB125A-3.5

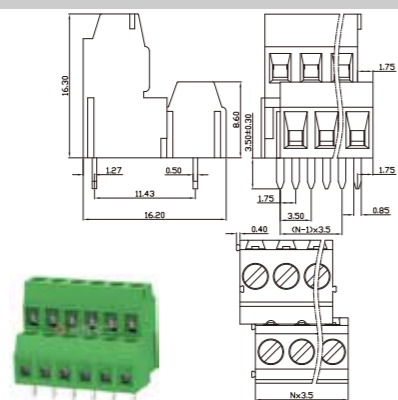

DB125H-3.81

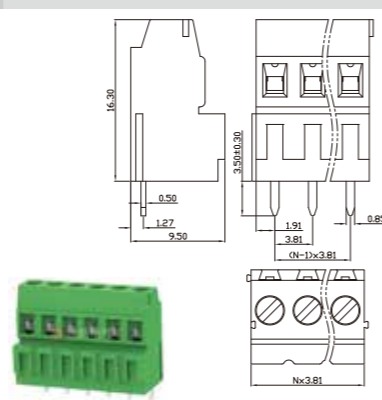


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		16	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		16	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		


DB125H-3.5

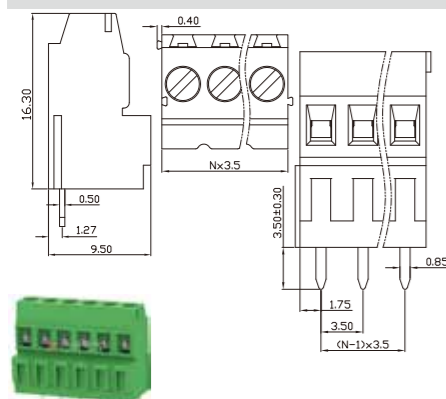

DB125-5.08

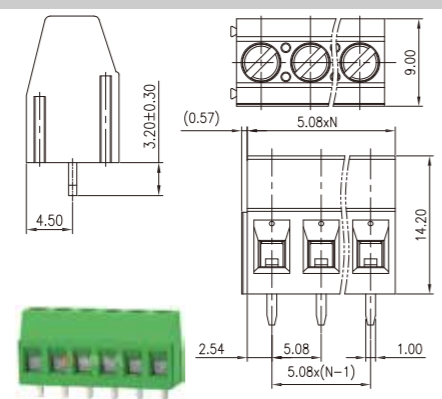

DB125-5.0

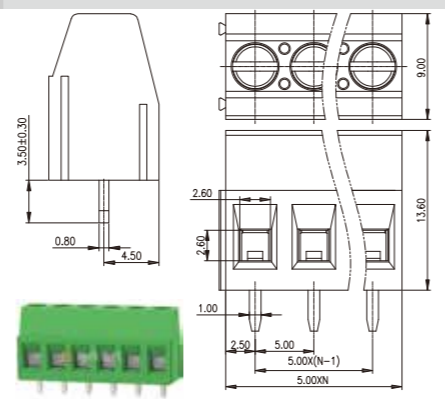


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		150	-	-
接线范围 Wire Range		30-14		
单/多芯线 Solid/Stranded [AWG]		30-14		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


DB121-3.5

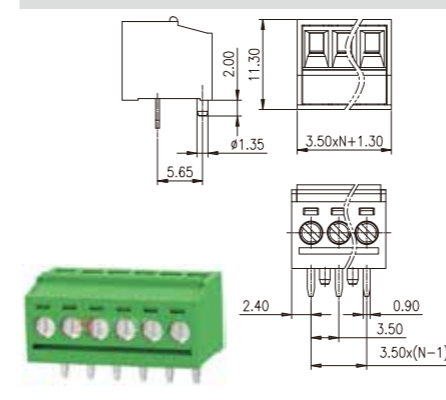

DB125-3.81

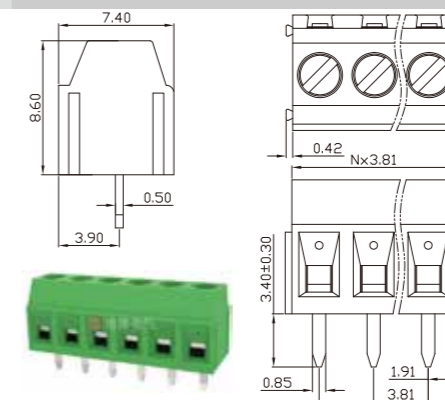

DB125-3.5

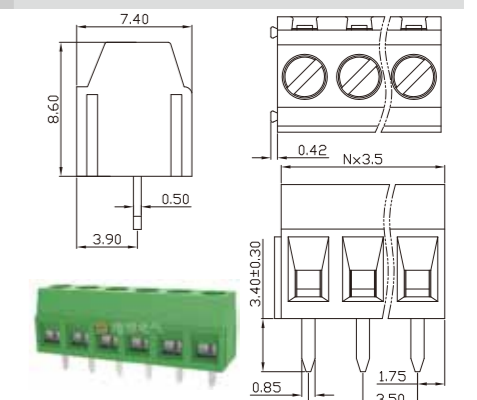


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		7	-	-
接线范围 Wire Range		26-18		
单/多芯线 Solid/Stranded [AWG]		26-18		
间距 Pitch [mm]		2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M1.6/0.1		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		200	-	200
额定电流 Rated Current [A]		13.5	-	13.5
接线范围 Wire Range		30-16		
单/多芯线 Solid/Stranded [AWG]		30-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		200	-	200
额定电流 Rated Current [A]		13.5	-	13.5
接线范围 Wire Range		30-16		
单/多芯线 Solid/Stranded [AWG]		30-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


DB125-2.54

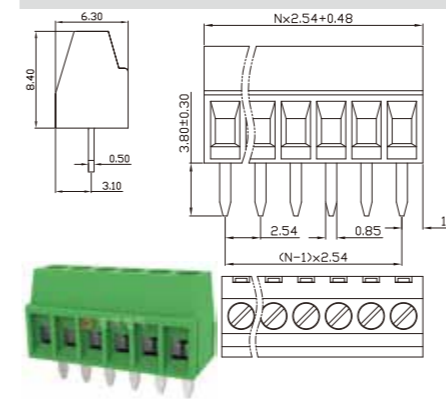

DB124-3.81

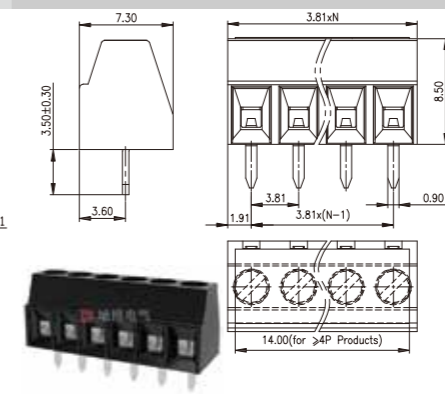

DB124-3.5



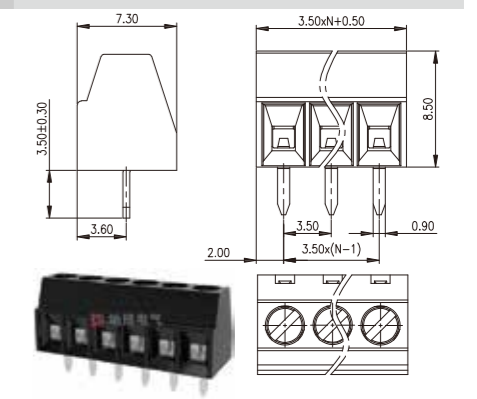


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		





UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

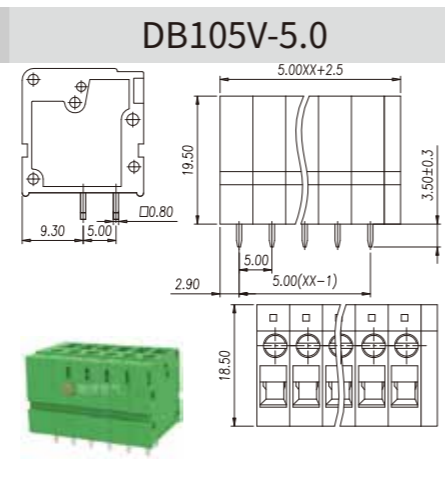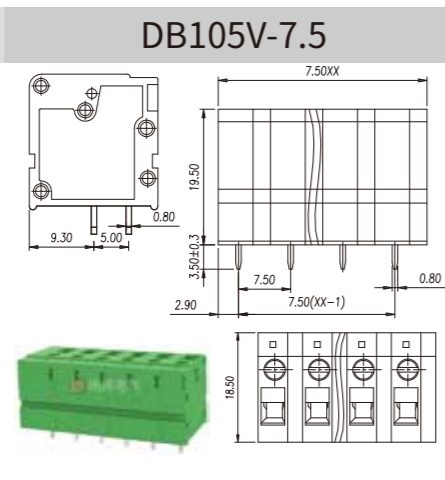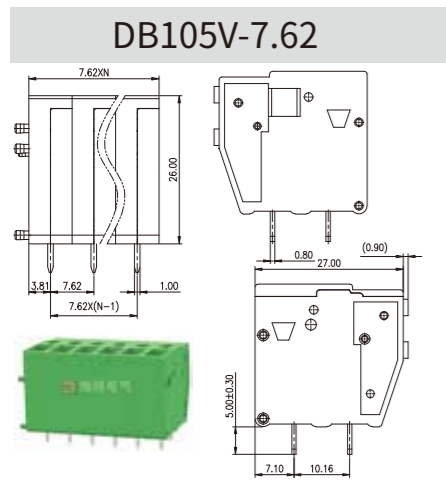

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-16		
单/多芯线 Solid/Stranded [AWG]		26-16		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

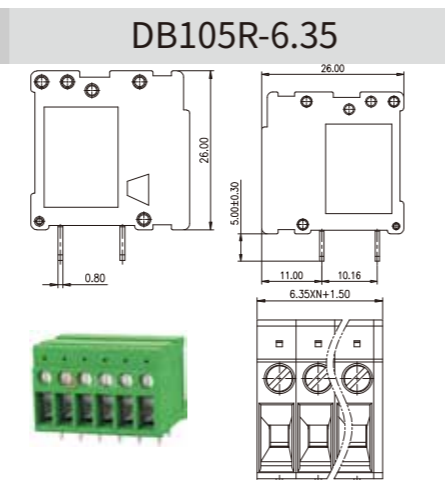
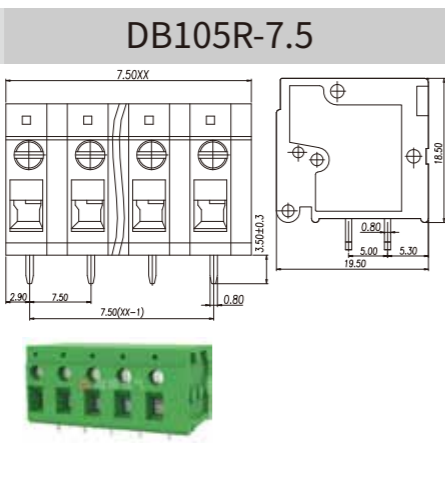
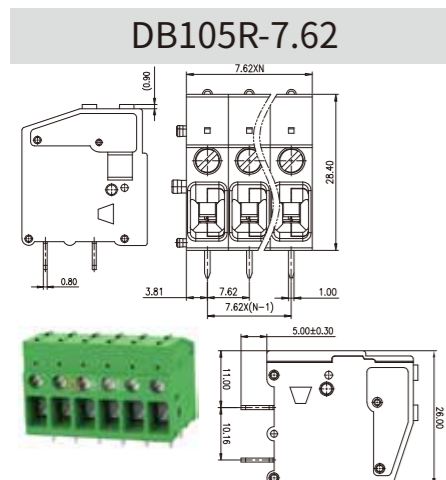


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

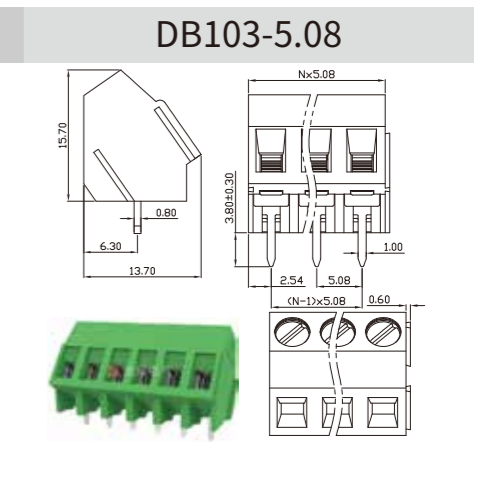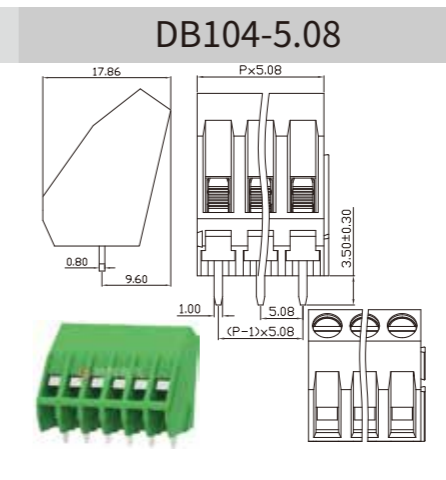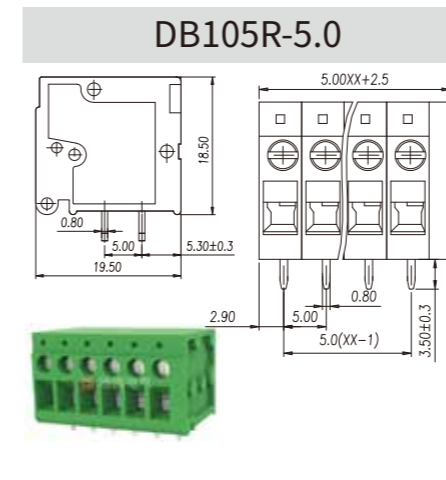

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		16	-	-
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		15	-	-
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

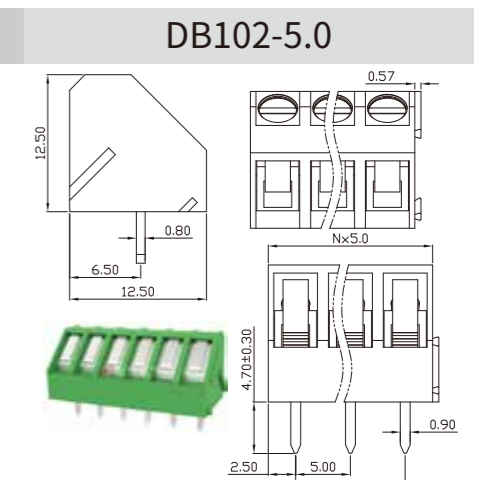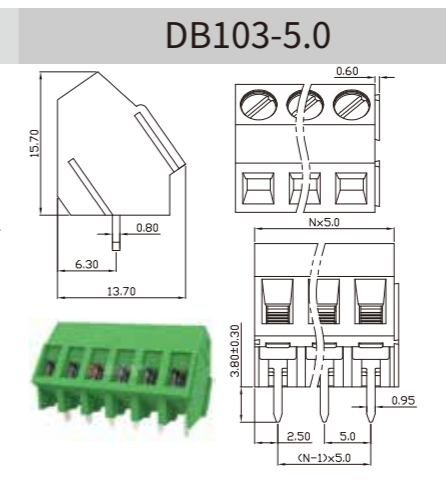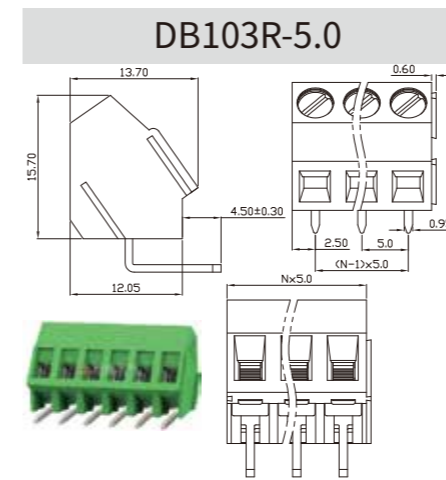


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		


DB910R-7.62

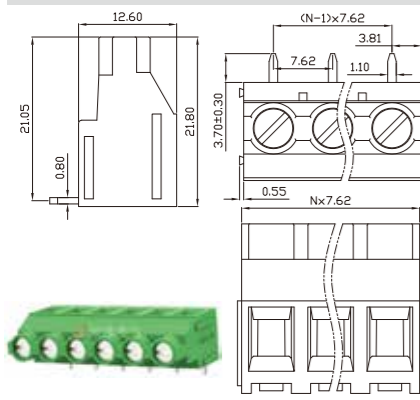


DB910R-6.35

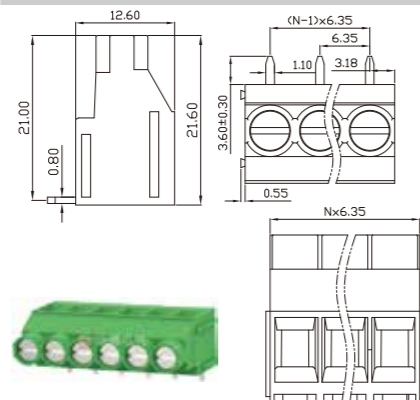


DB910R-5.0

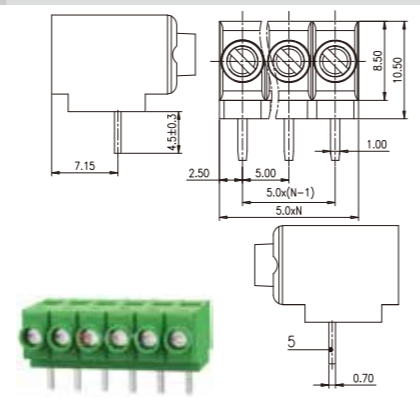


DB910-7.62

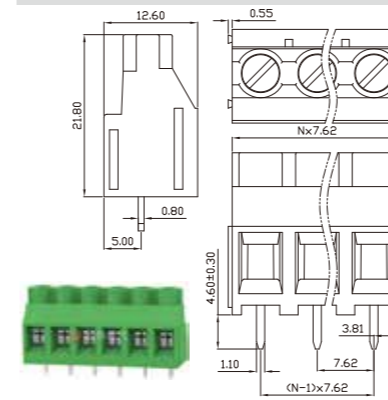

DB910-7.5

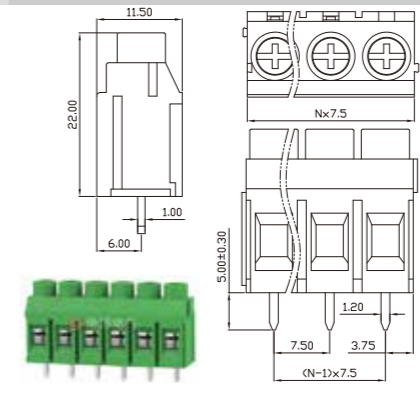

DB910-6.35

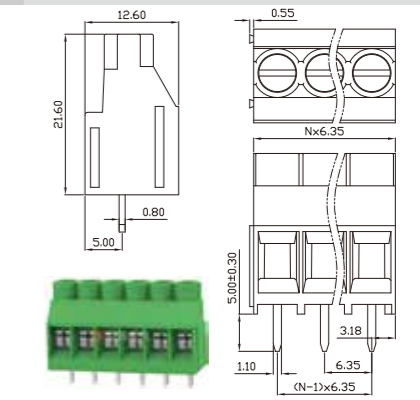

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	30
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


DB910S-9.52

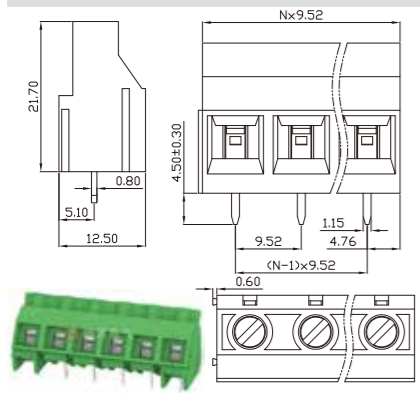


DB910S-6.35

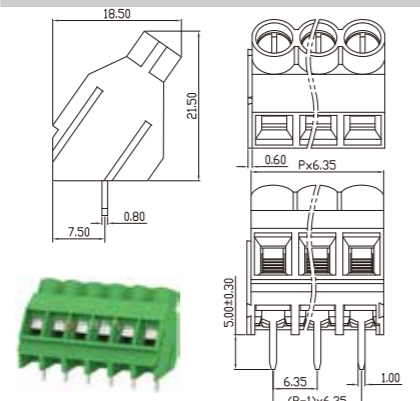


DB910-9.52

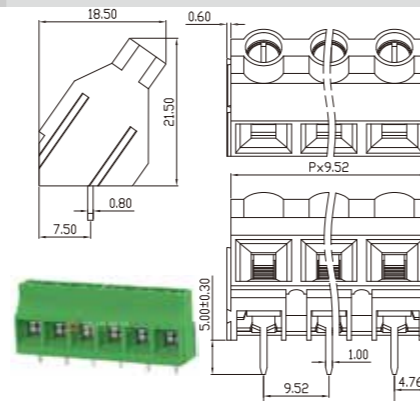


DB910-5.0

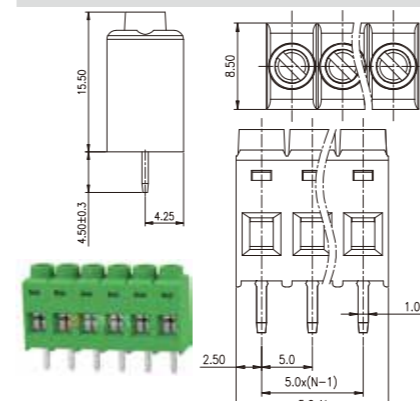

DB910A-9.52

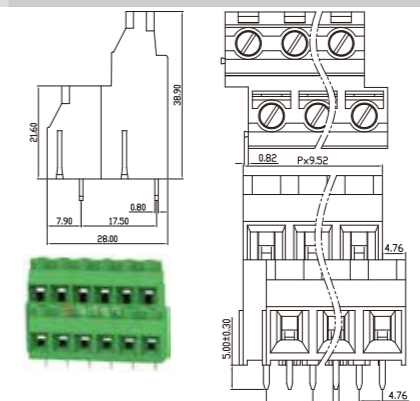

DB910A-6.35



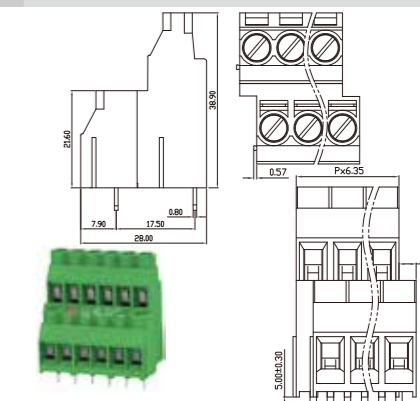


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		600	-	300
额定电流 Rated Current [A]		60	-	10
接线范围 Wire Range		20-6		
单/多芯线 Solid/Stranded [AWG]		20-6		
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4.0/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		30-12		
单/多芯线 Solid/Stranded [AWG]		30-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.6		

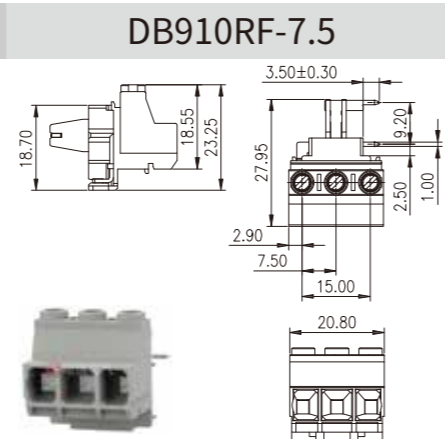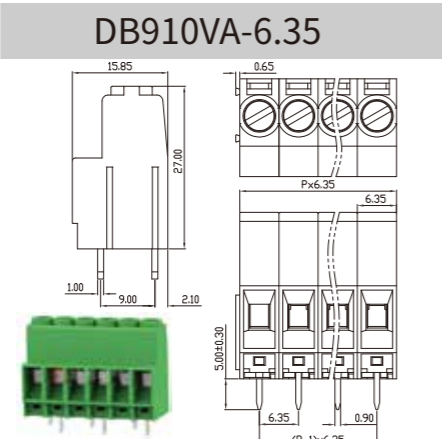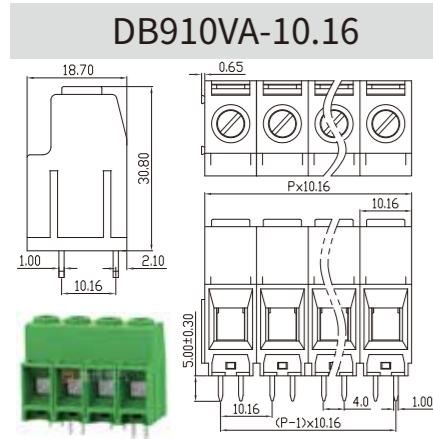

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		30-12		
单/多芯线 Solid/Stranded [AWG]		30-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.6		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

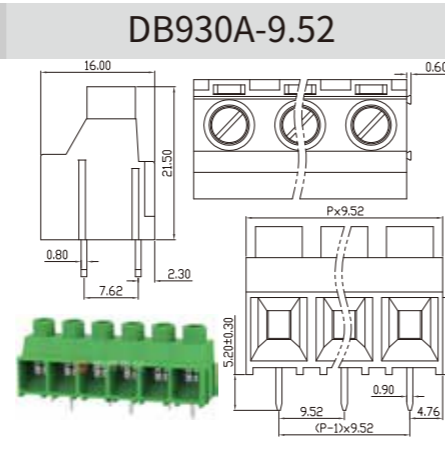
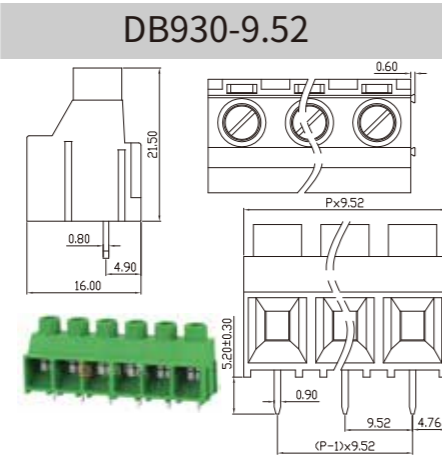
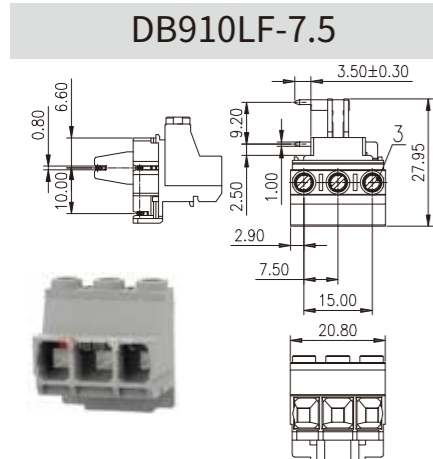


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		600	-	300
额定电流 Rated Current [A]		100	-	10
接线范围 Wire Range		18-3		
单/多芯线 Solid/Stranded [AWG]		18-3		
间距 Pitch [mm]		19.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M5.0/2.0		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		160	160	-
接线范围 Wire Range		26-2/0		
单/多芯线 Solid/Stranded [AWG]		26-2/0		
间距 Pitch [mm]		17.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M6/5.5		

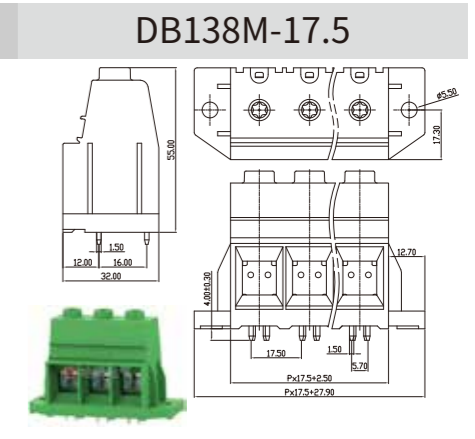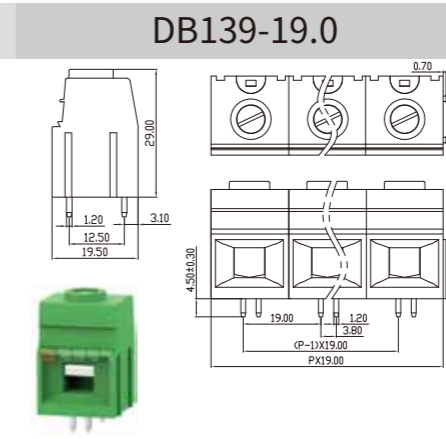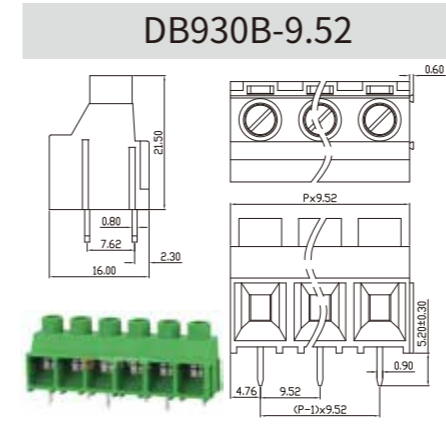

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		160	160	-
接线范围 Wire Range		26-2/0		
单/多芯线 Solid/Stranded [AWG]		26-2/0		
间距 Pitch [mm]		17.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M6/5.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		115	-	5
接线范围 Wire Range		20-2		
单/多芯线 Solid/Stranded [AWG]		20-2		
间距 Pitch [mm]		15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M5/2.0		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		115	-	5
接线范围 Wire Range		20-2		
单/多芯线 Solid/Stranded [AWG]		20-2		
间距 Pitch [mm]		15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M5/2.0		

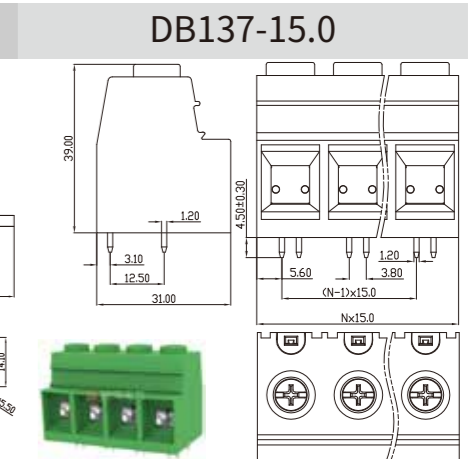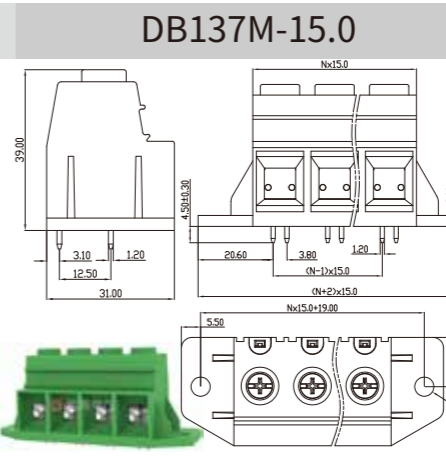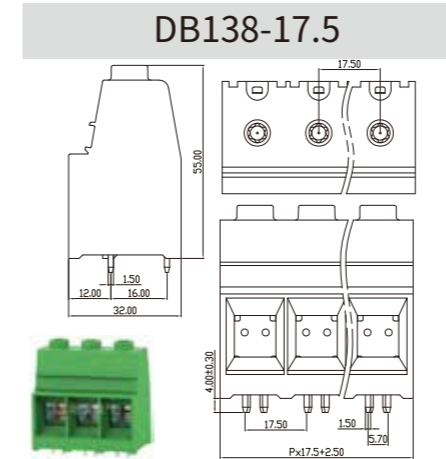


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	65	-	-
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	65	-	-
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DB136HA-10.16

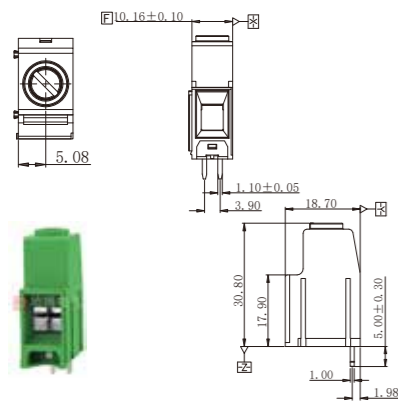


DB136HB-10.16

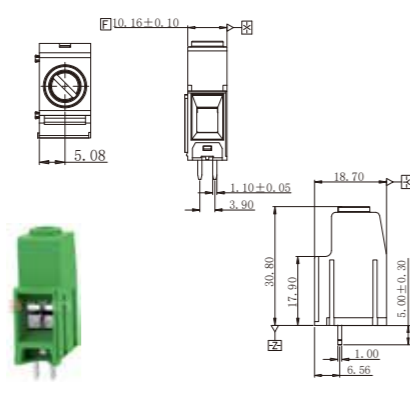


DB136H-12.7

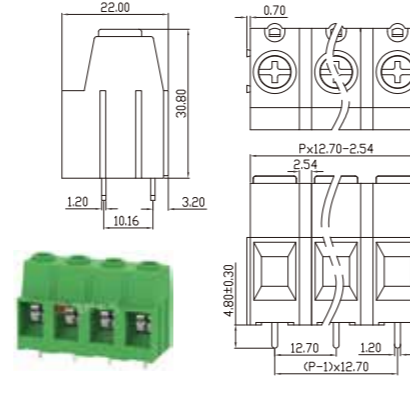


DB116B-12.7

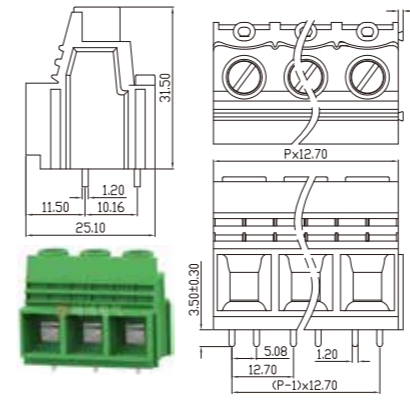

DB116A-12.7

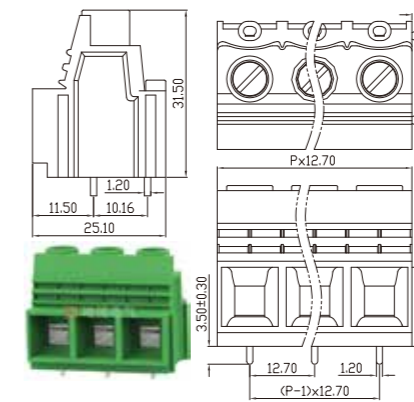

DB116B-10.16

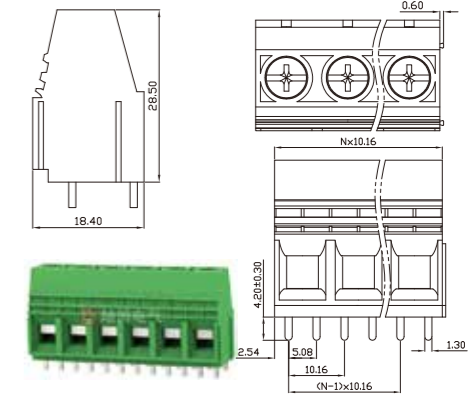


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	52	-	5
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DB136H-10.16

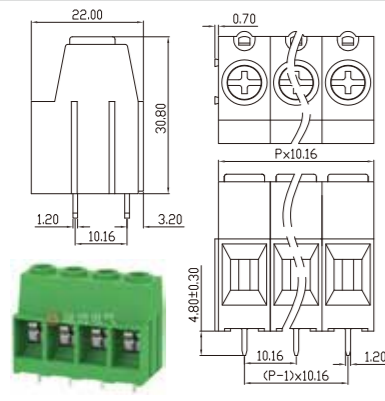


DB136-10.16

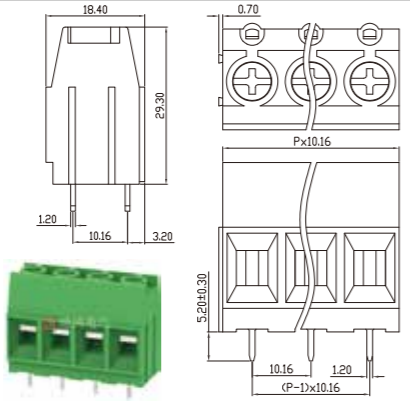


DB135-10.16

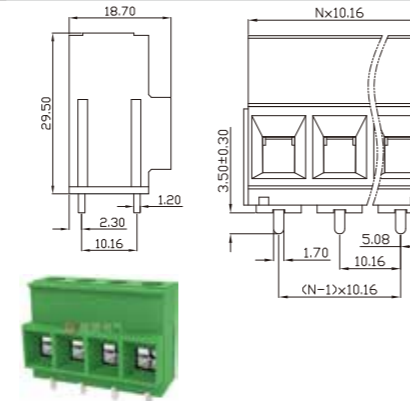


DB116A-10.16

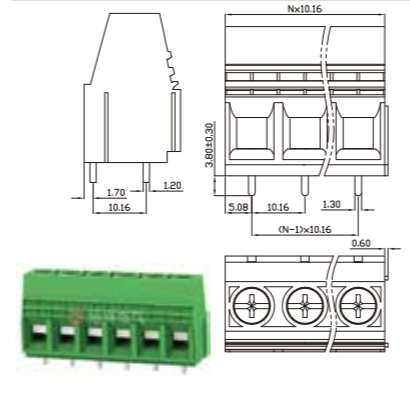

DB130-7.62

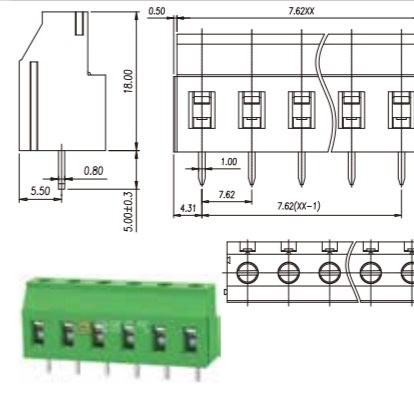

DB130H-5.08

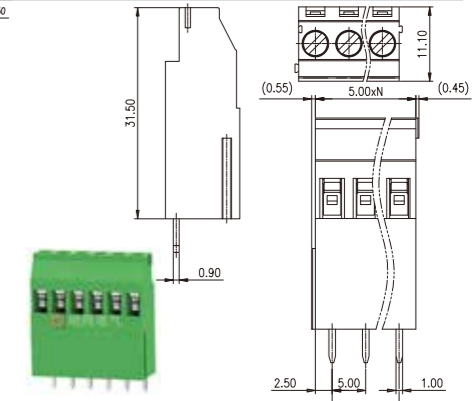

# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		



# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

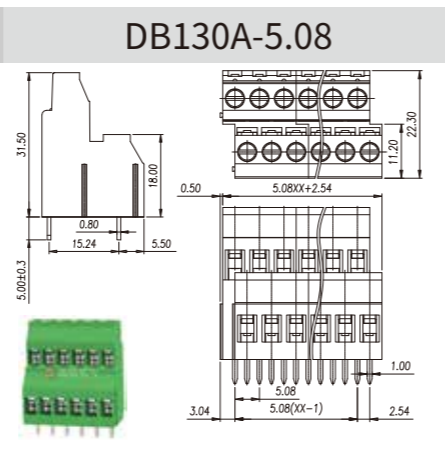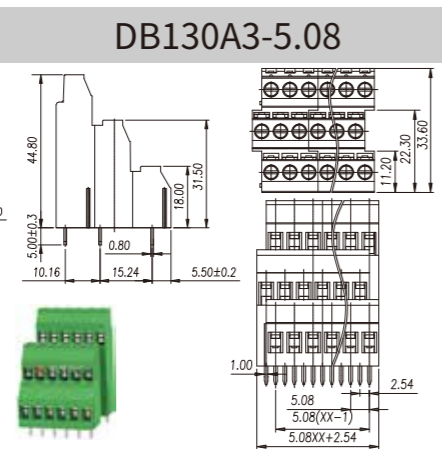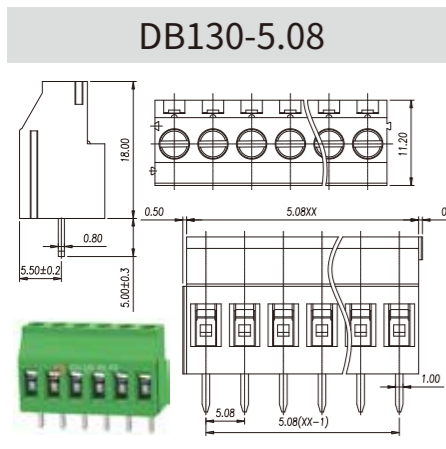

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	0.2-2.5		
单/多芯线 Solid/Stranded [AWG]	0.2-2.5		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

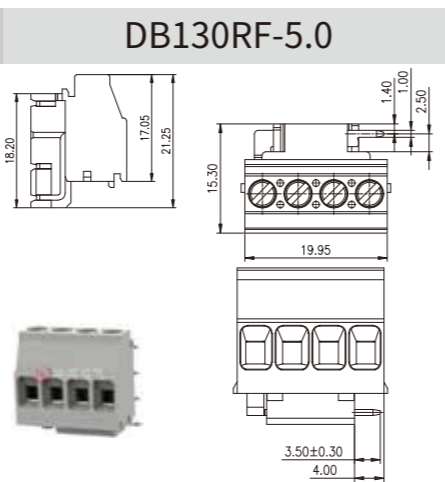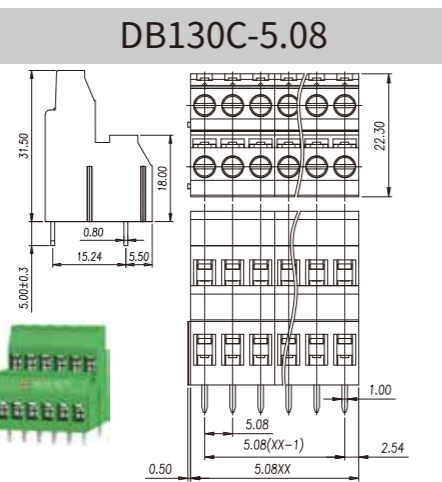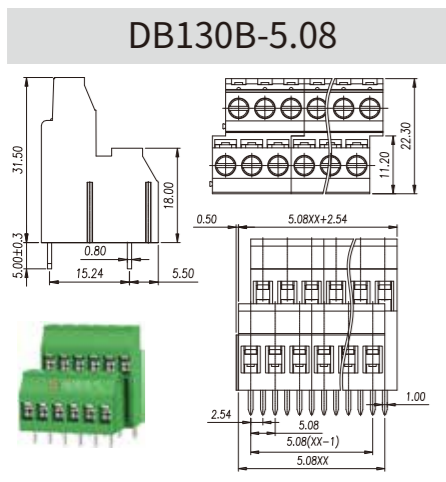

# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	0.2-2.5		
单/多芯线 Solid/Stranded [AWG]	0.2-2.5		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

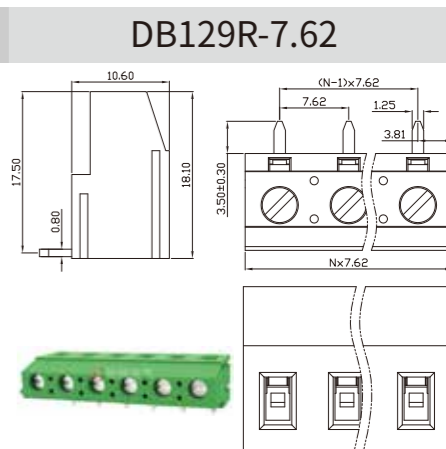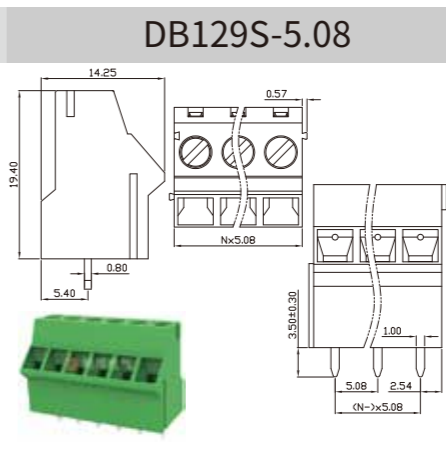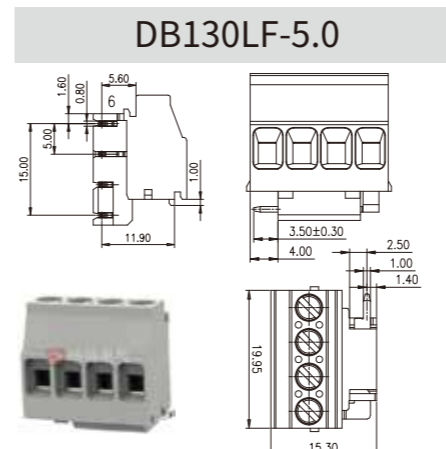

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
--------------------------------------	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

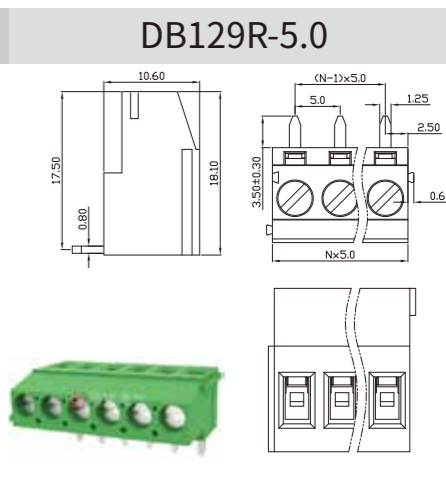
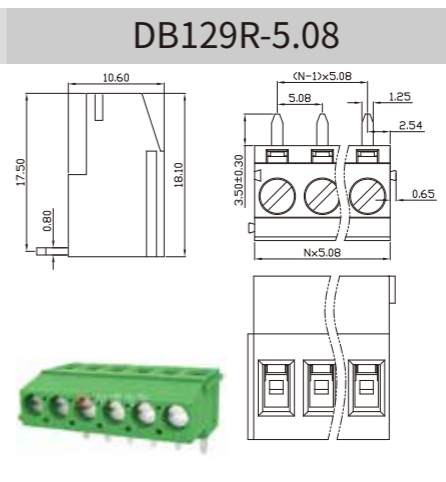
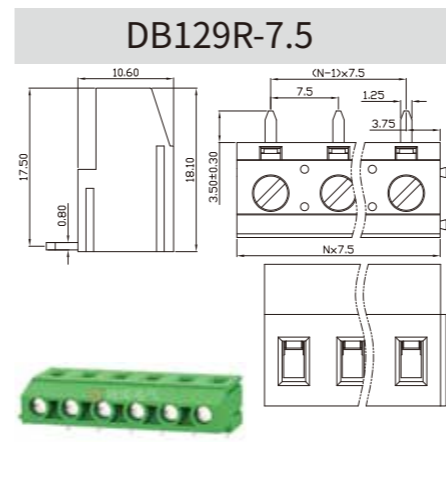


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

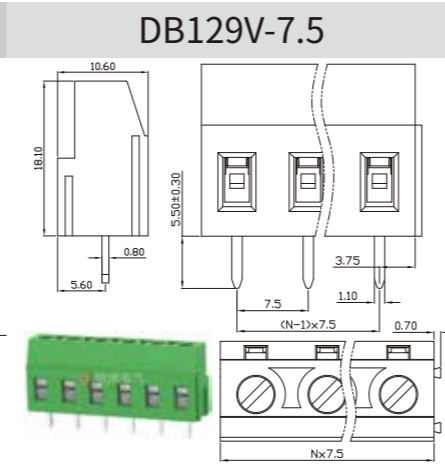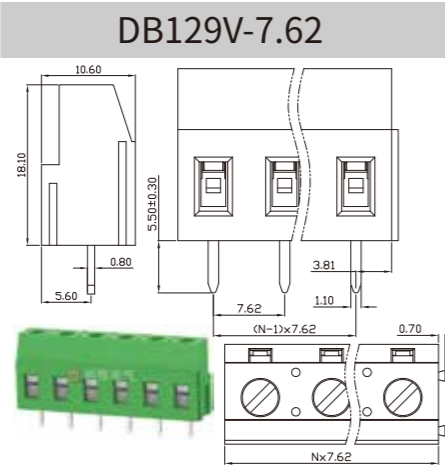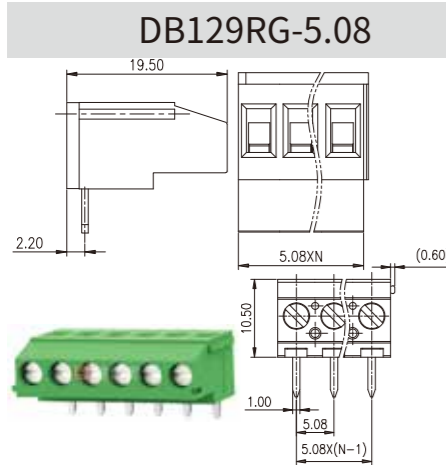

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.6		

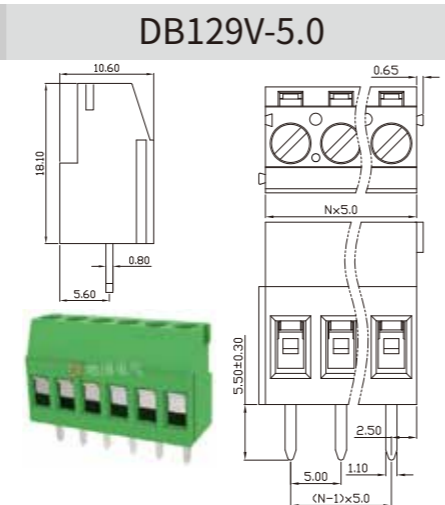
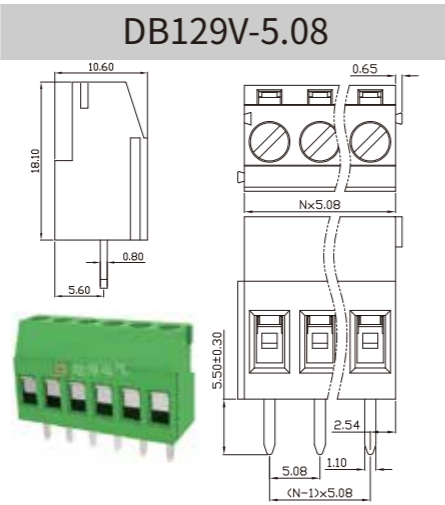
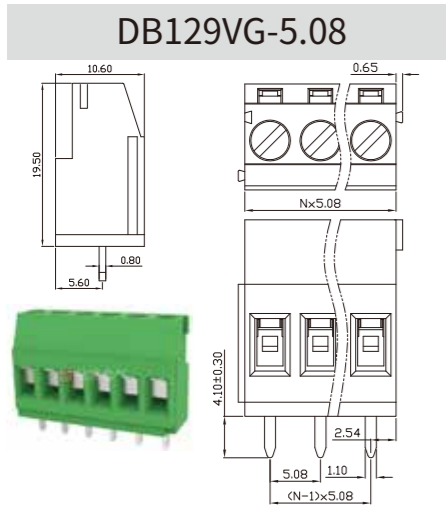


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.35		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

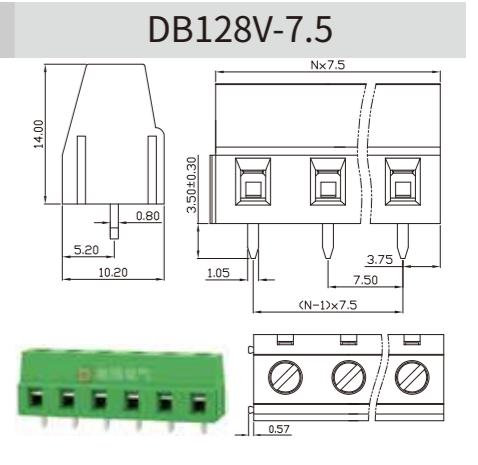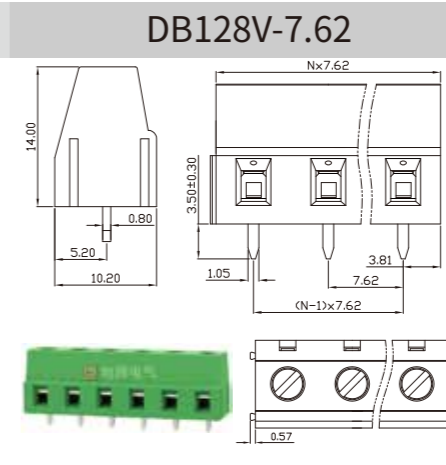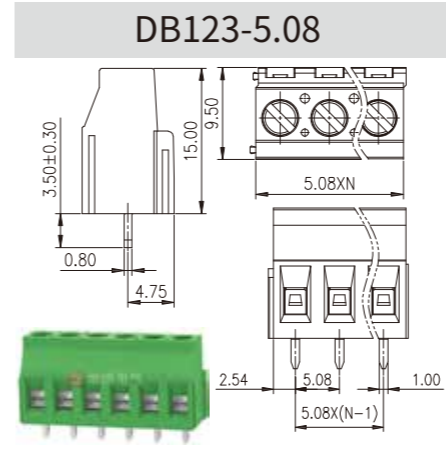

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

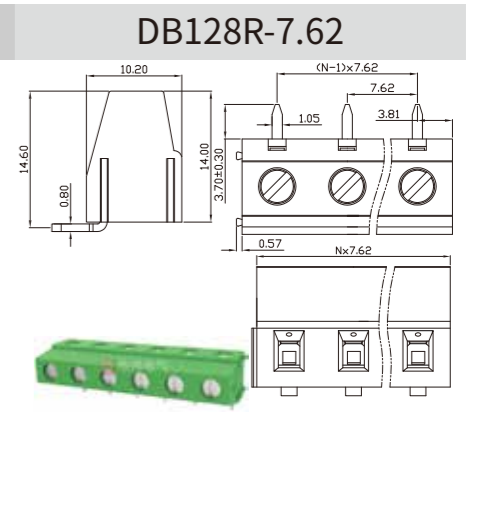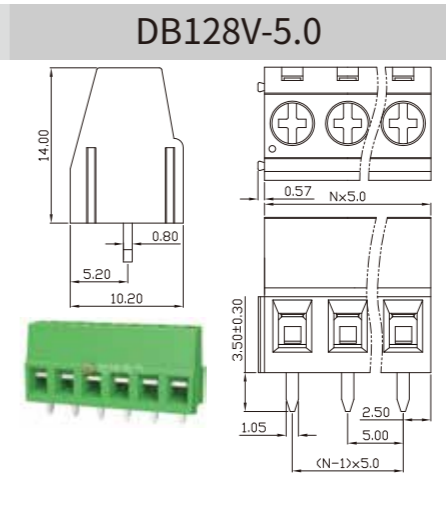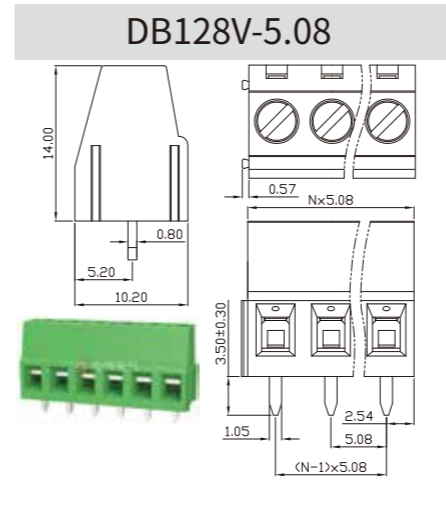

# 升降式端子台 Lifting terminal block

## UL/CUL 技术参数 UL/CUL Technical Data


等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

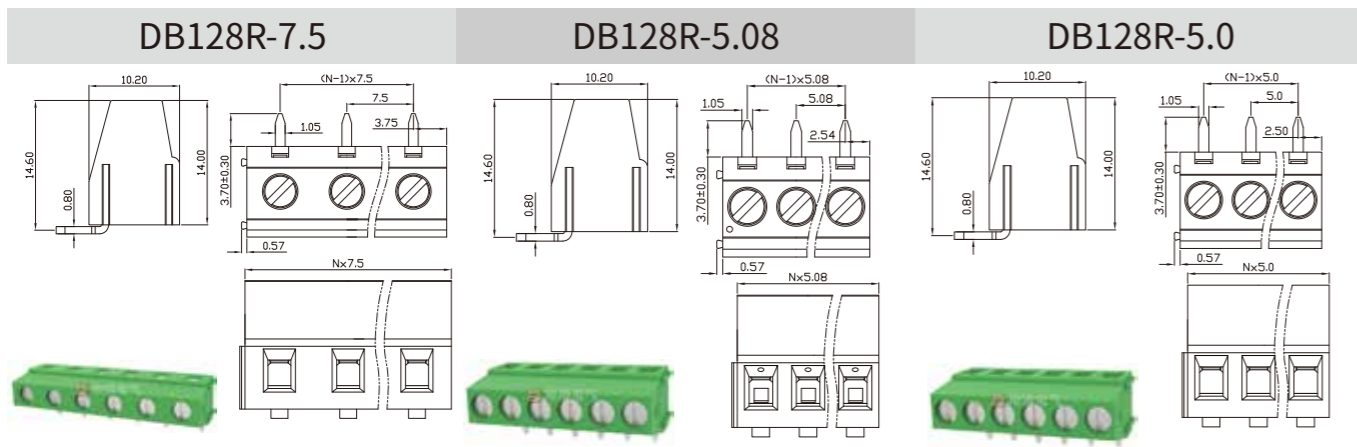

## UL/CUL 技术参数 UL/CUL Technical Data


等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

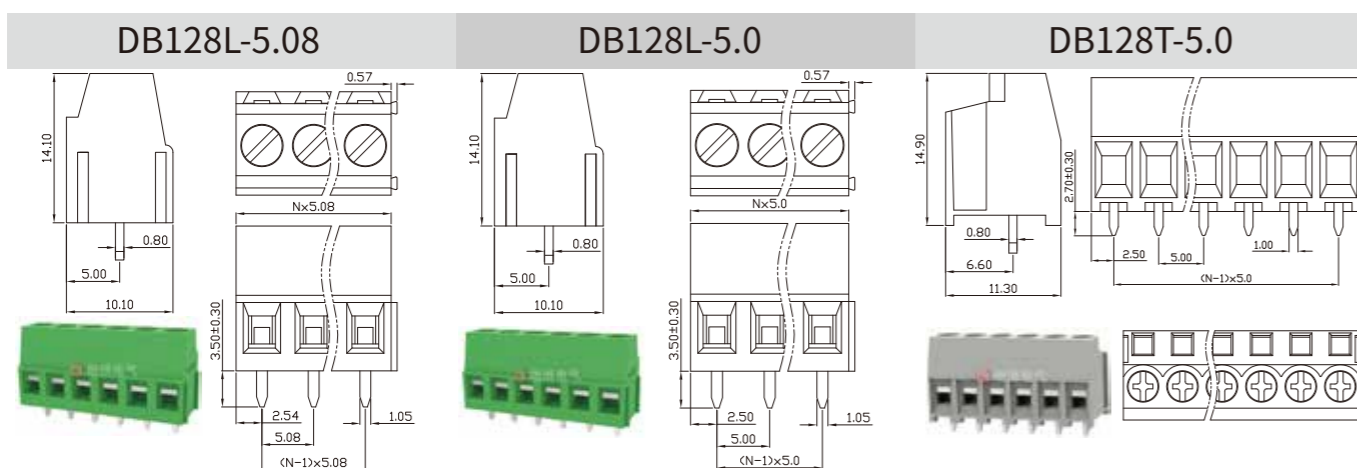

# 升降式端子台 Lifting terminal block

## UL/CUL 技术参数 UL/CUL Technical Data


等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

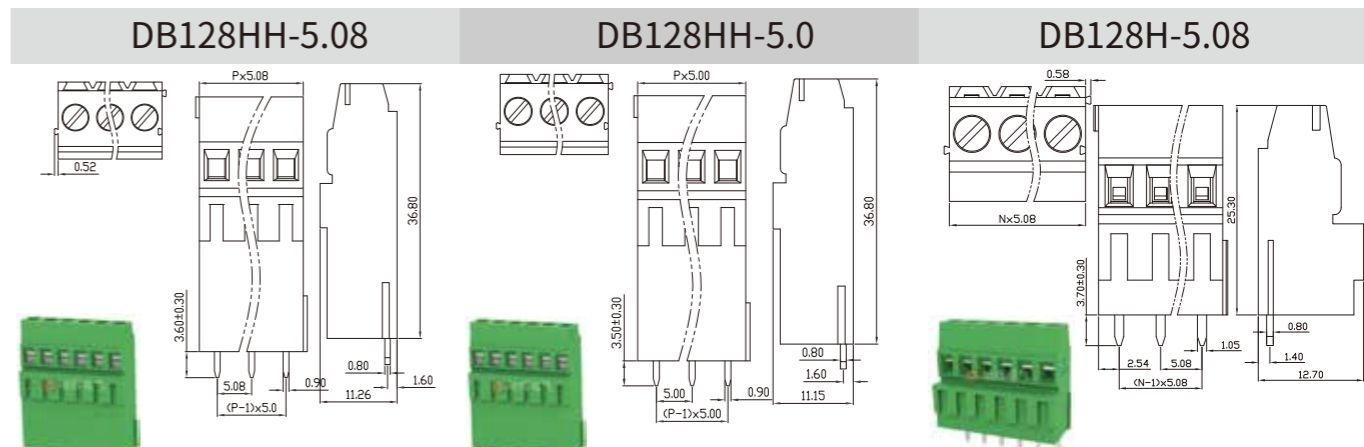

## UL/CUL 技术参数 UL/CUL Technical Data


等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		



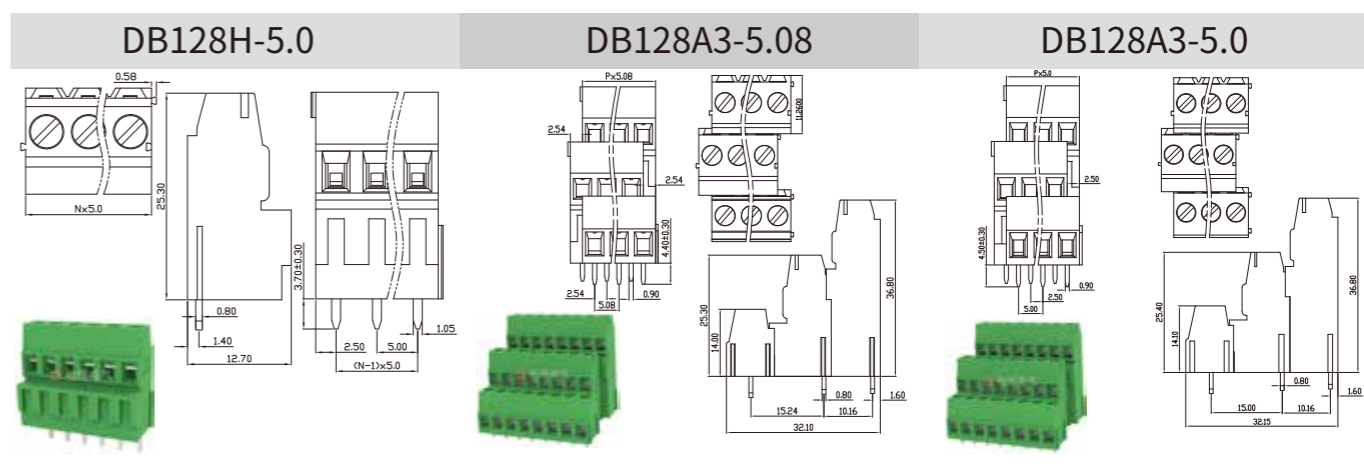


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

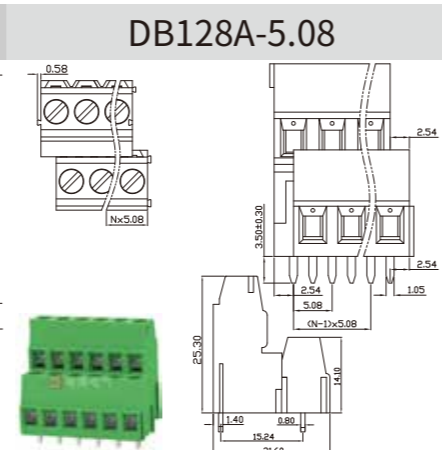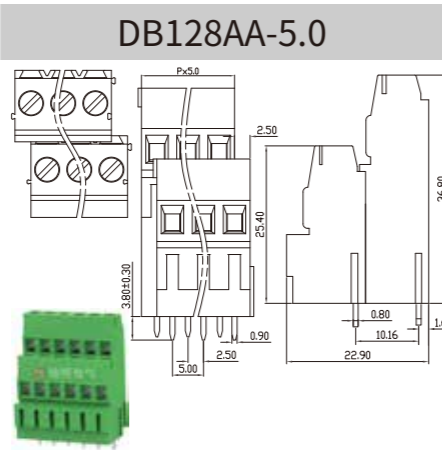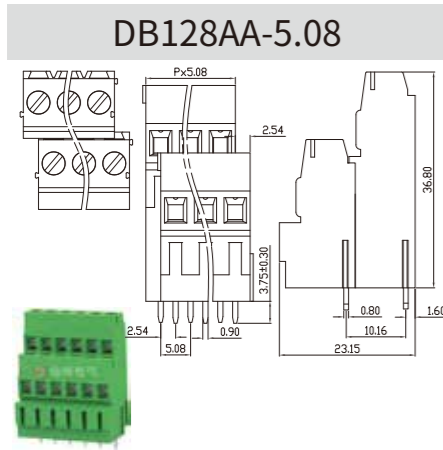

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

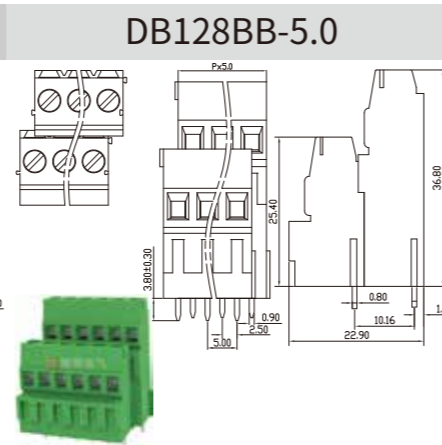
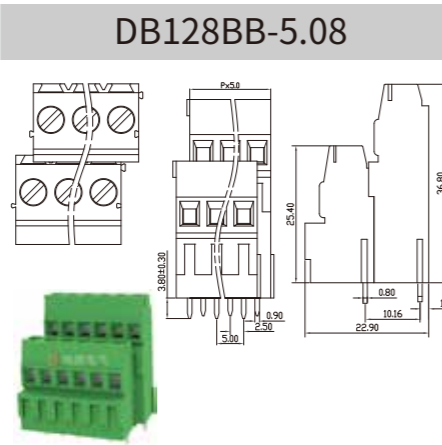
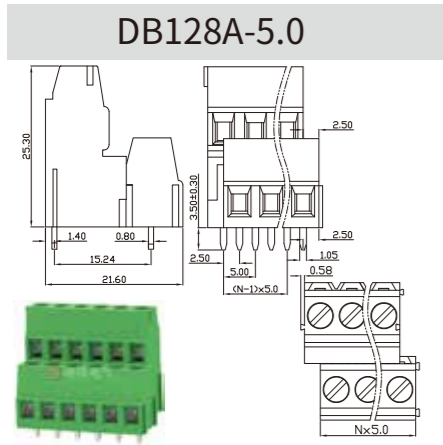


# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	20
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		12	-	-
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.50		

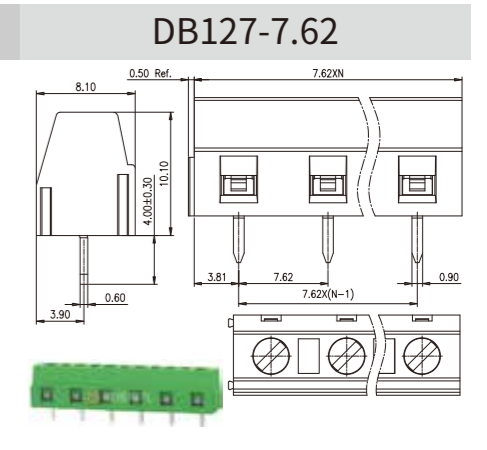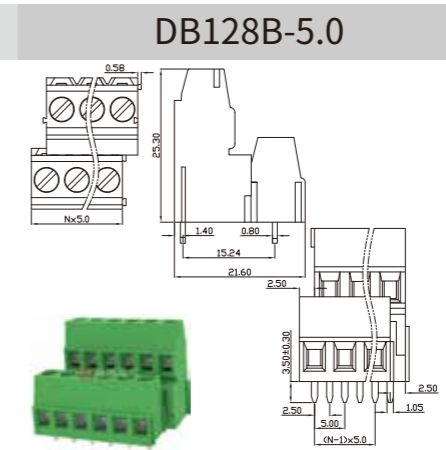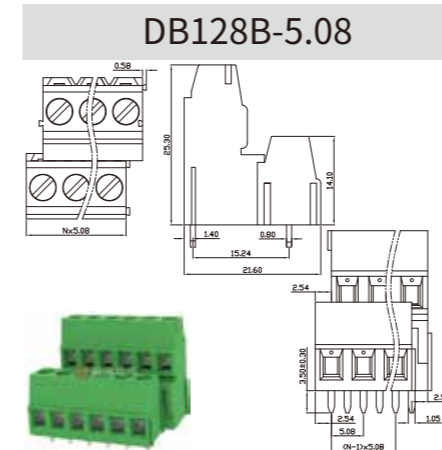

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

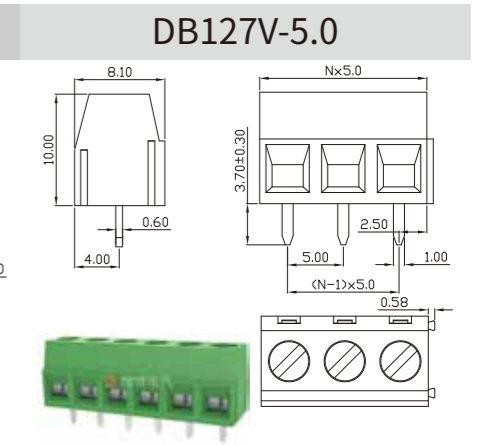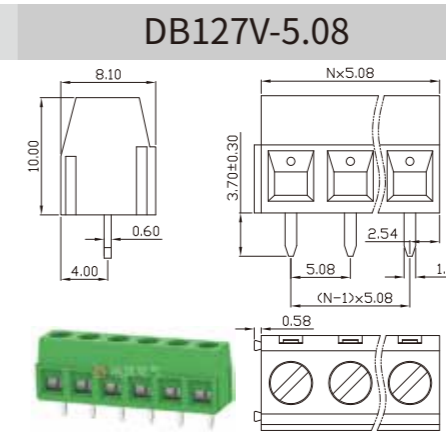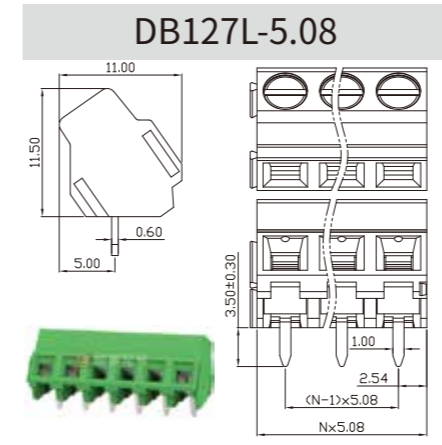

# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.4		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	12-10		
单/多芯线 Solid/Stranded [AWG]	12-10		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.35		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB127HH-5.0

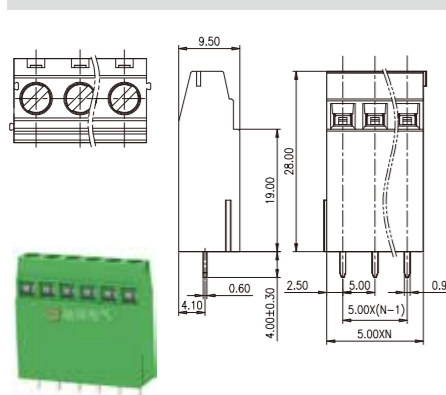


DB127H-5.08

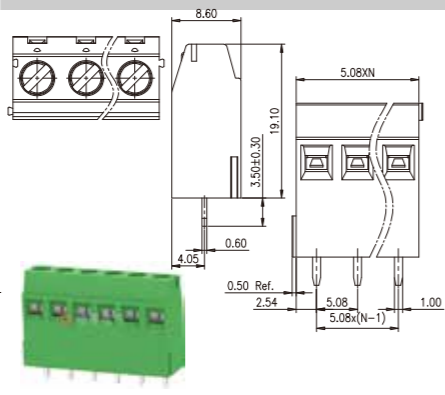


DB127R-5.08

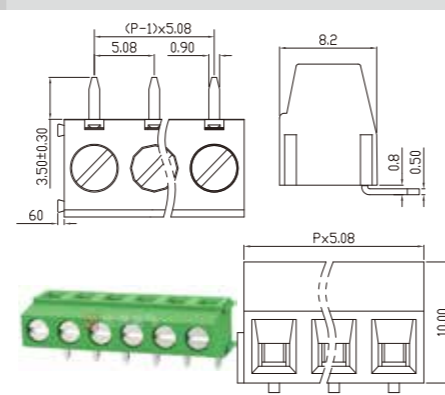


DB127S-3.81

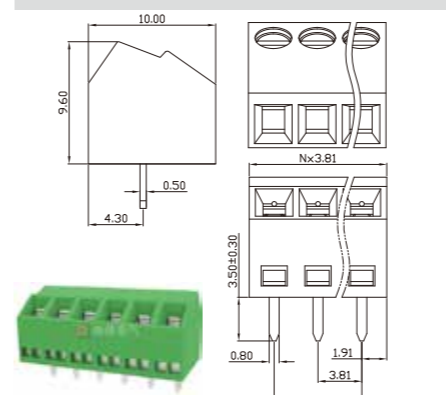

DB127S-3.5

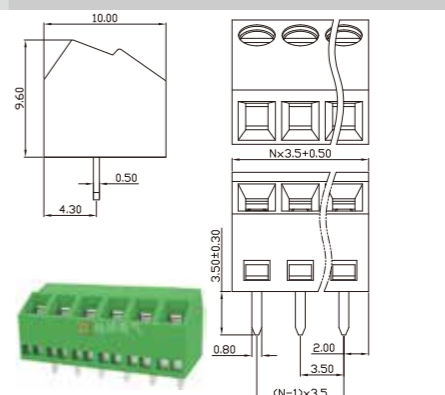

DB127A-5.08

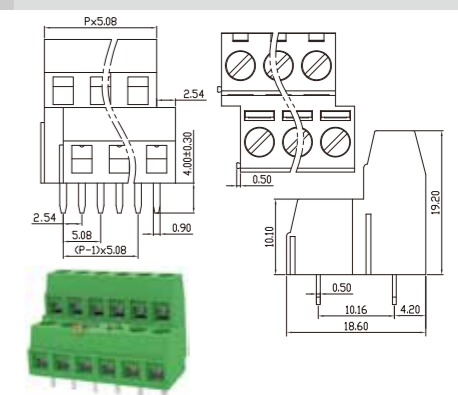

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB127R-5.0

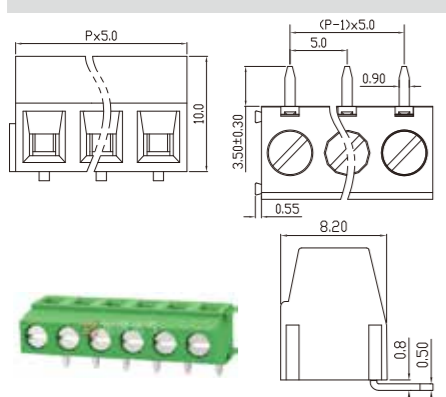


DB127S-5.08

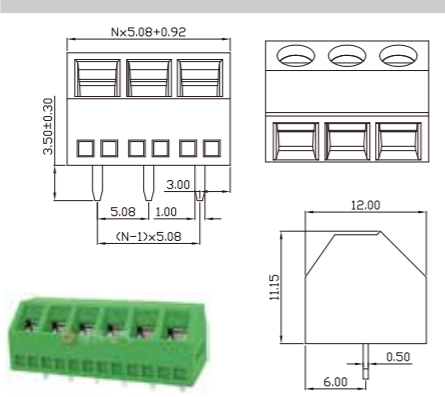


DB127S-5.0

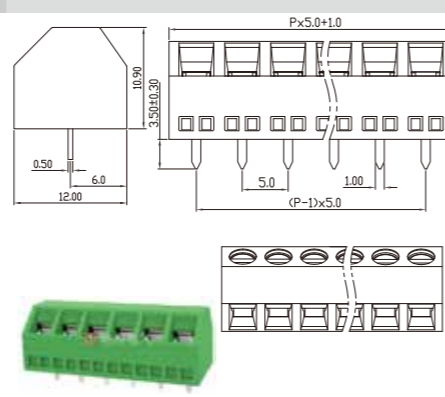

DB127A3-5.08

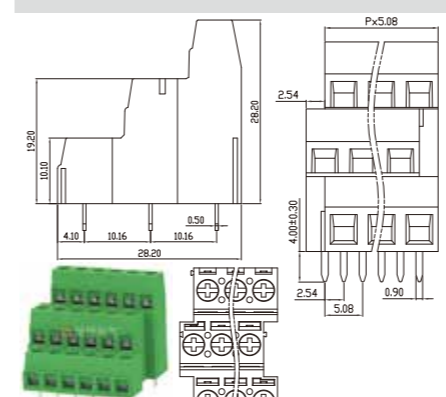

DB127A-5.0

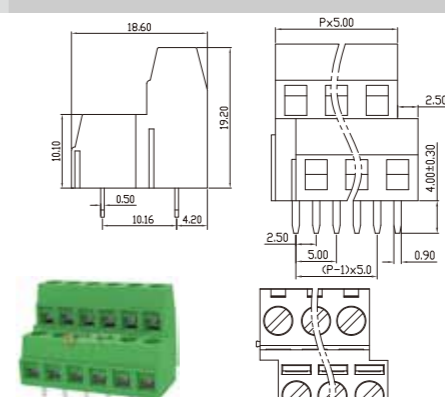

# 升降式端子台 Lifting terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-16		
单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-16		
单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

Barrier terminal block

# 栅栏式端子台

The design of the fence type terminal block provides multiple specifications of foot pitch options ranging from 6.35 to 13mm. Various specifications can be paired with various terminals, corresponding to a voltage of 150-600V, The current is 10~40A. The product provides double-sided and three-sided partition designs for convenient protection and guidance of different circuit wiring. The product design complies with IEC60998 International standards such as UL1059. We have obtained CQC certification in China and UL certification in the United States.

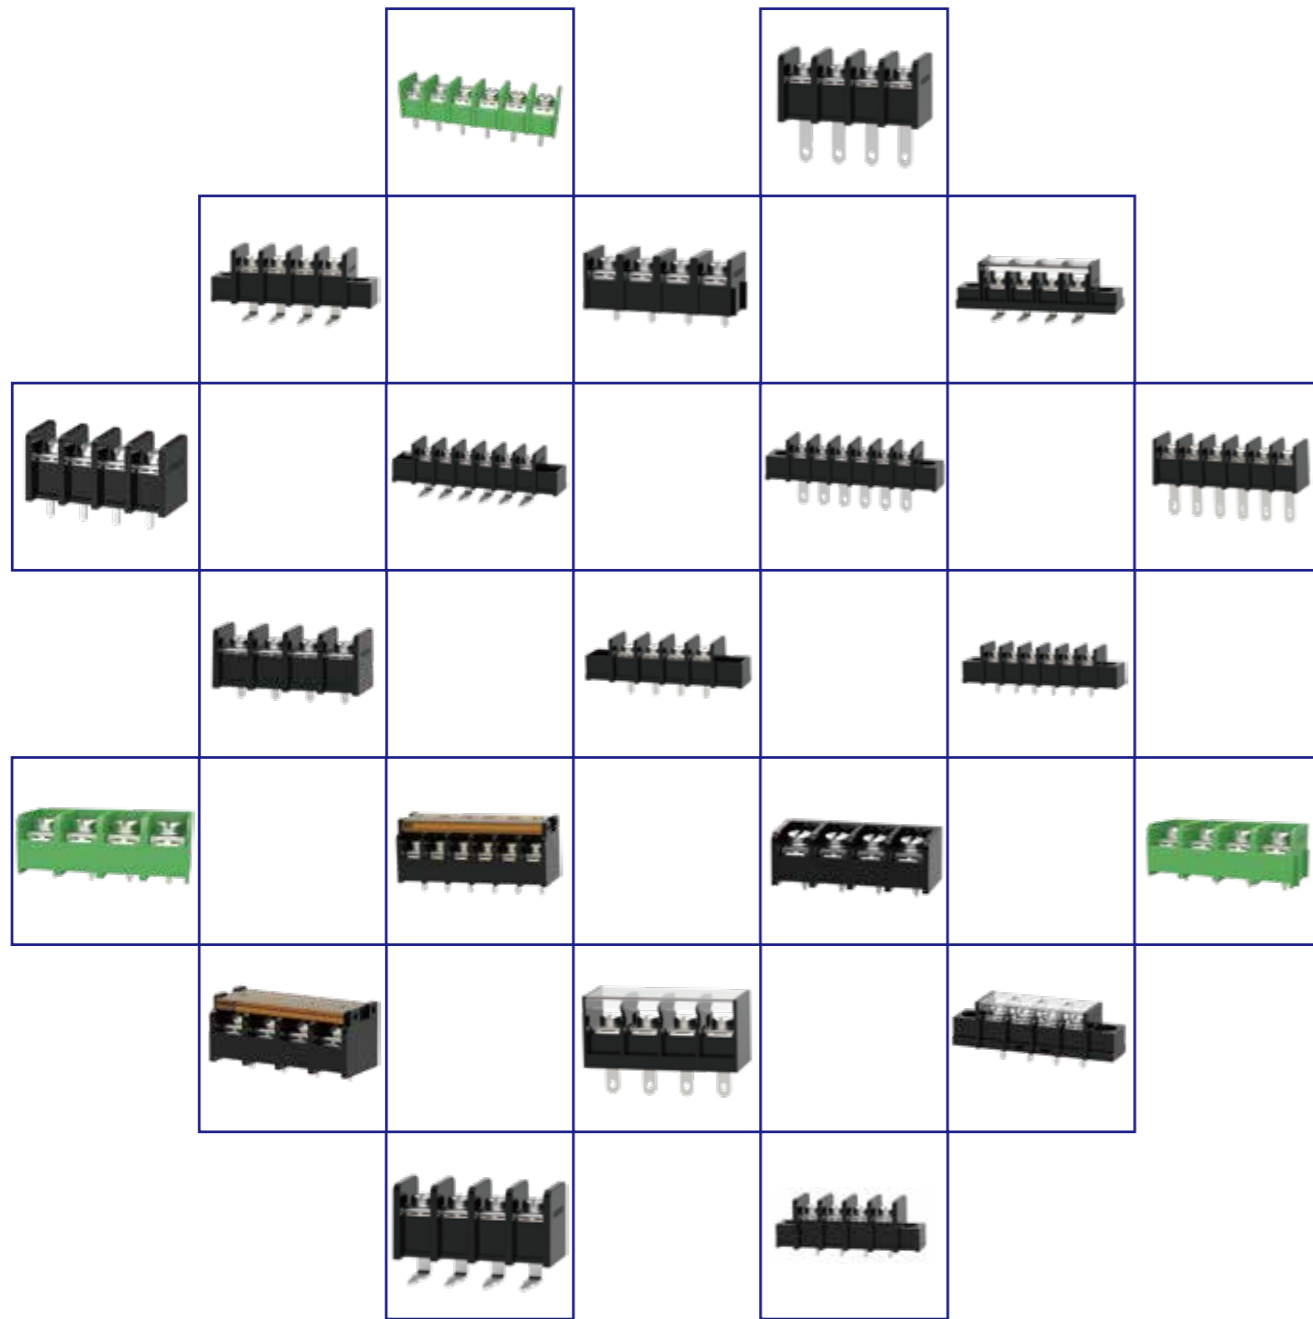


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		30	30	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		11.11		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	150	300
额定电流 Rated Current [A]		30	30	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		11.00		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

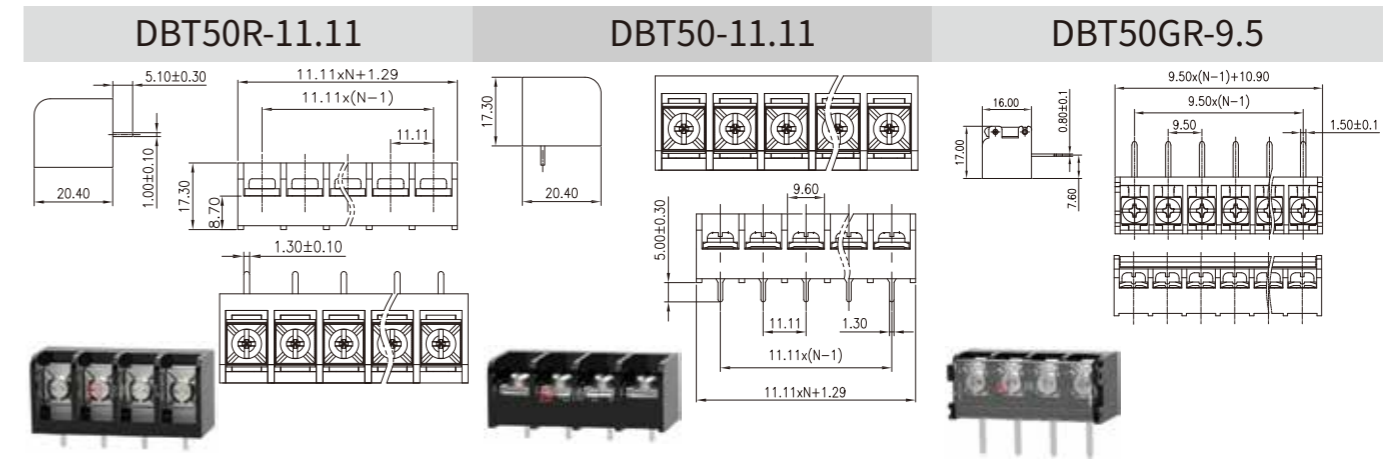

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		



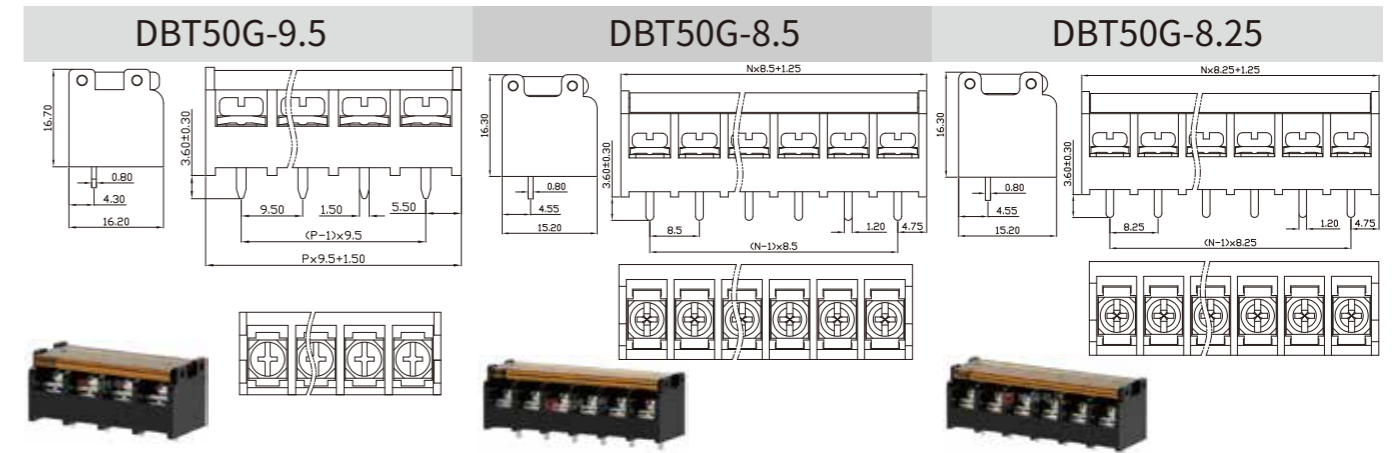


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-16		
单/多芯线 Solid/Stranded [AWG]		22-16		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

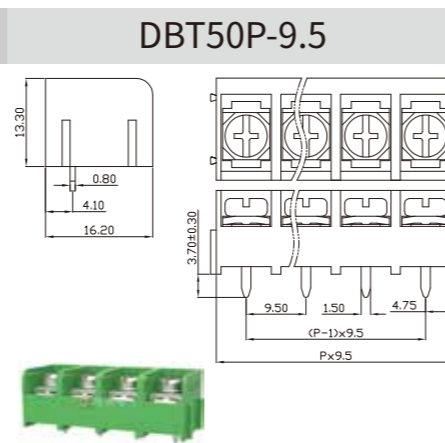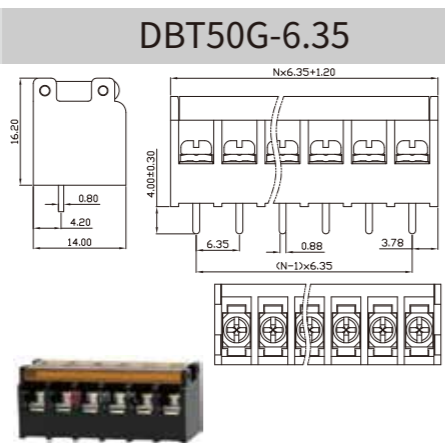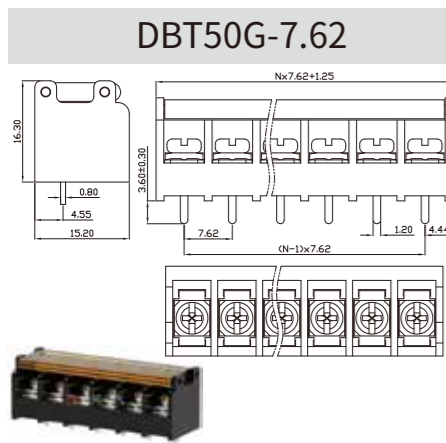

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	150	300
额定电流 Rated Current [A]		20	20	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

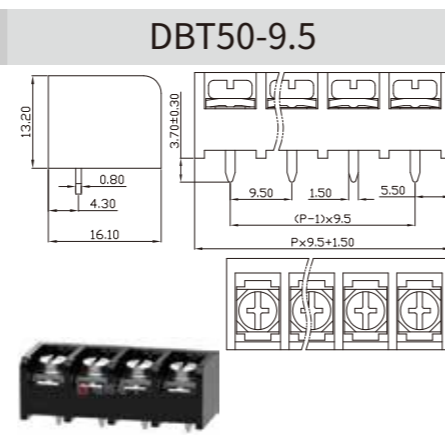
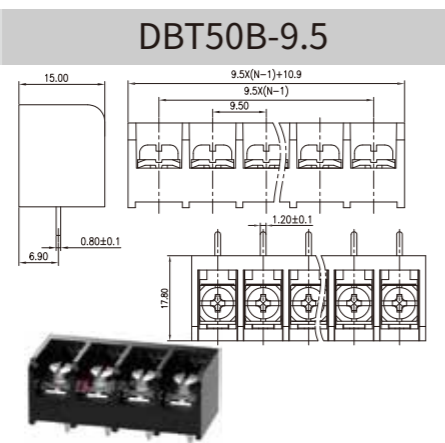
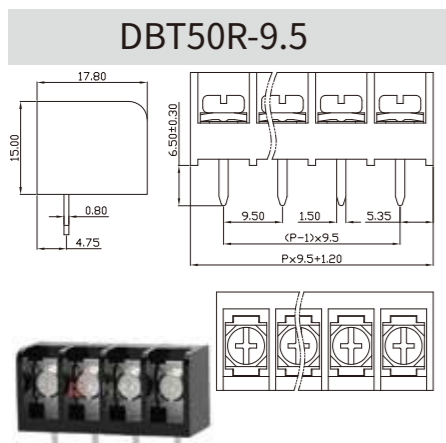


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M./0.8		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

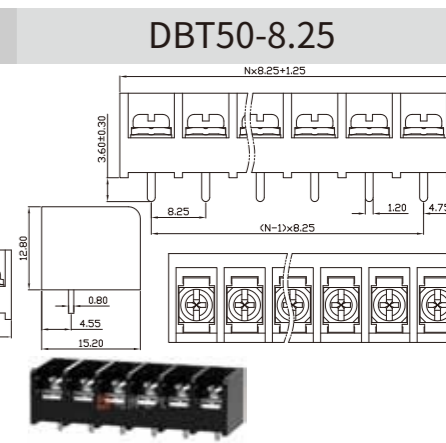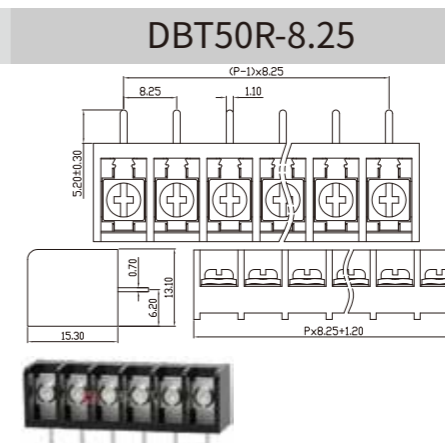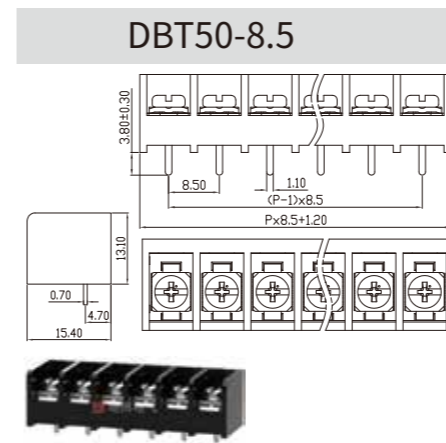

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-16		
单/多芯线 Solid/Stranded [AWG]		22-16		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		3.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

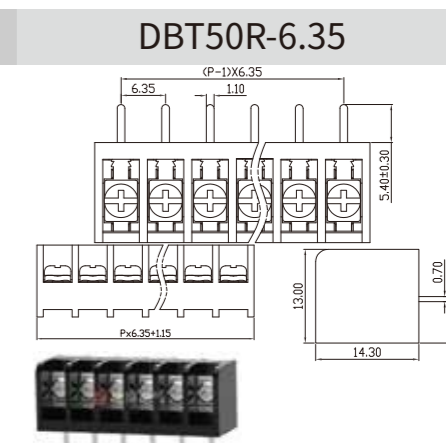
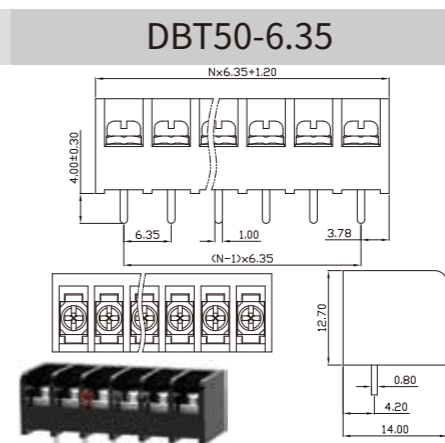
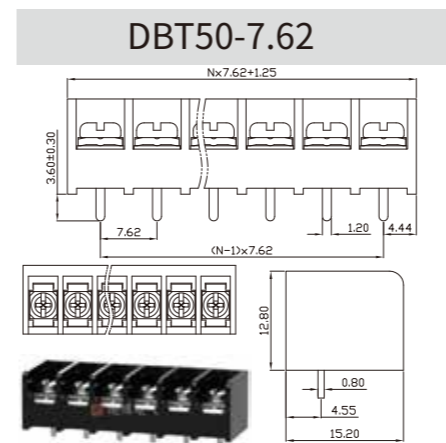


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - 300			
额定电流 Rated Current [A]	10 - 10			
接线范围 Wire Range	22-16			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	6.35			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	65 - -			
接线范围 Wire Range	14-6			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	16.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M6/3.0			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - 600			
额定电流 Rated Current [A]	40 - 5			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

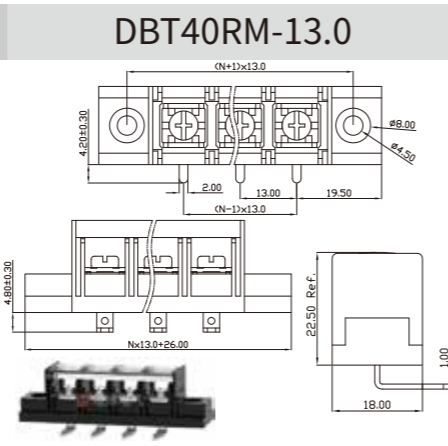
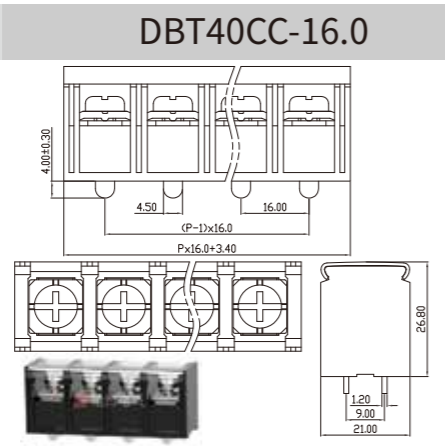
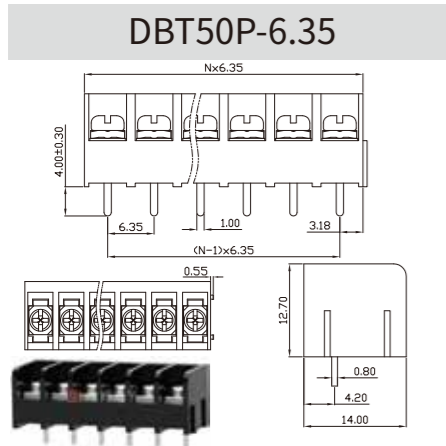


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - 600			
额定电流 Rated Current [A]	40 - 5			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/1.4			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5			

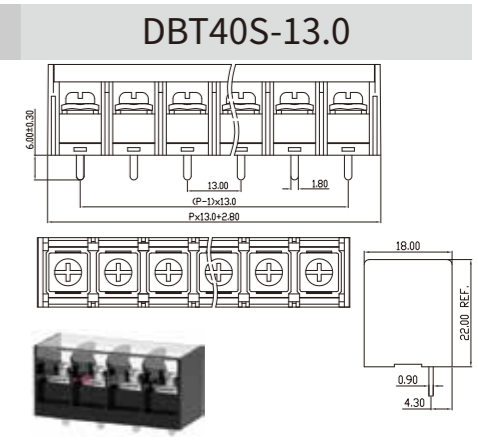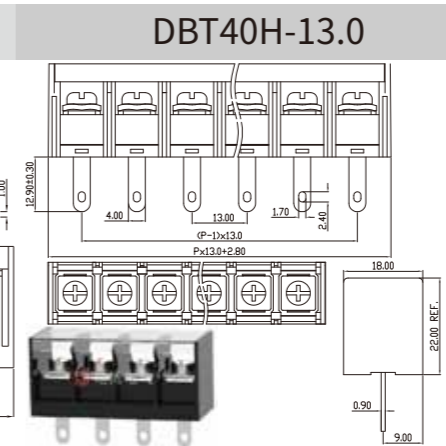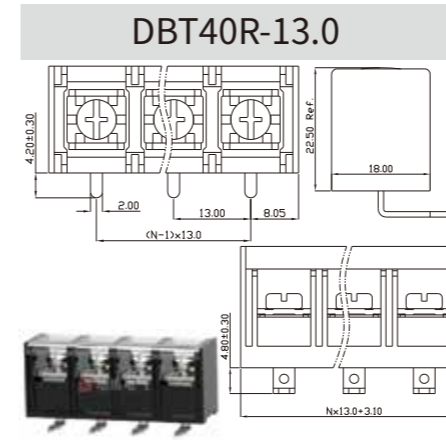

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-0			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			







UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-0			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-0			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	13.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

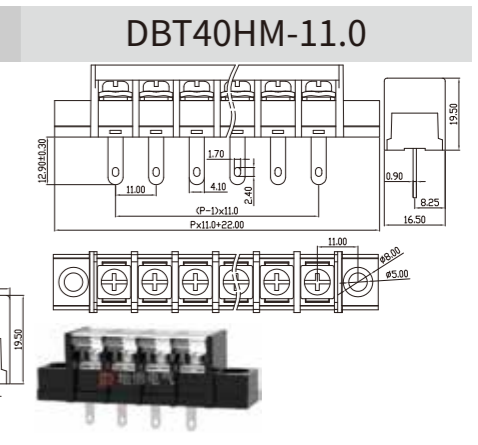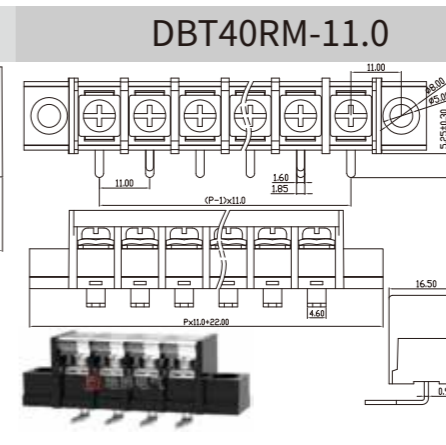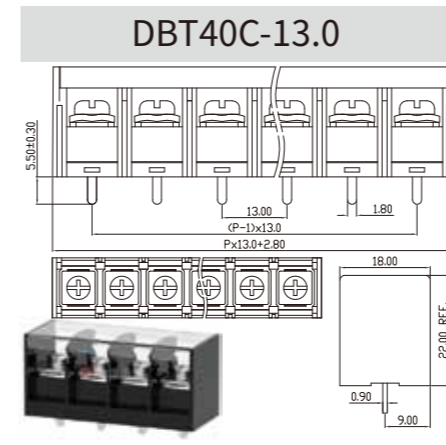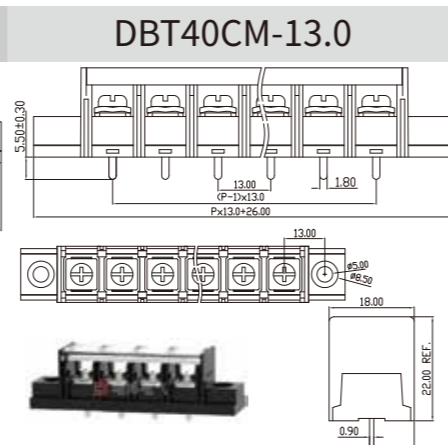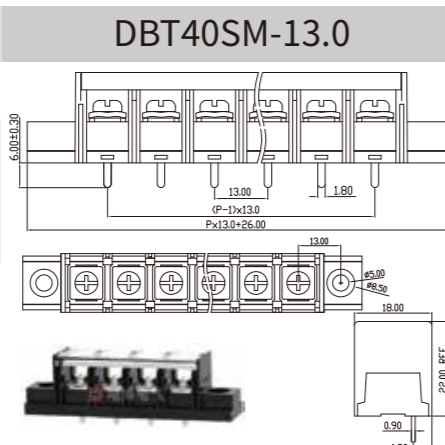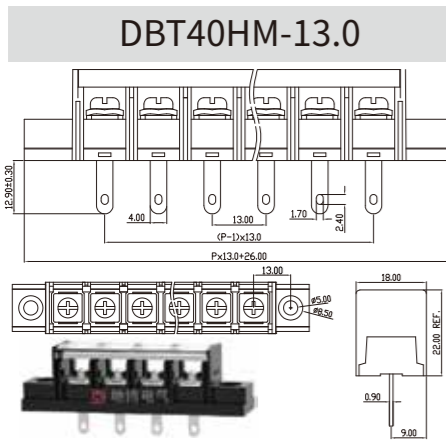






# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

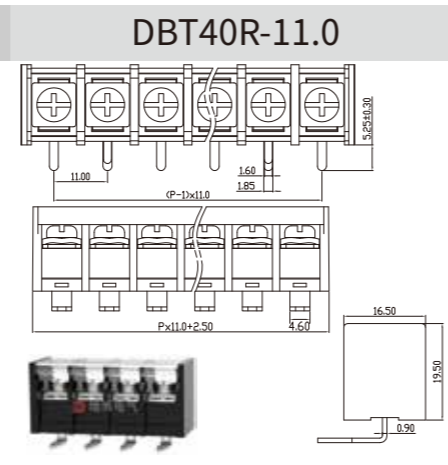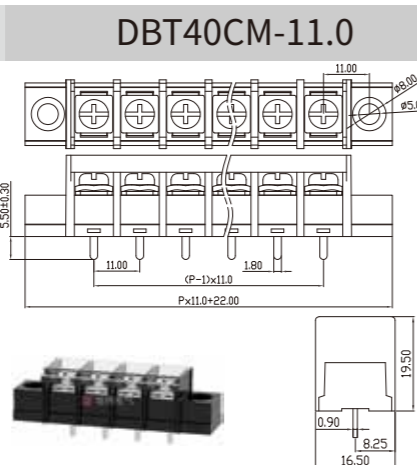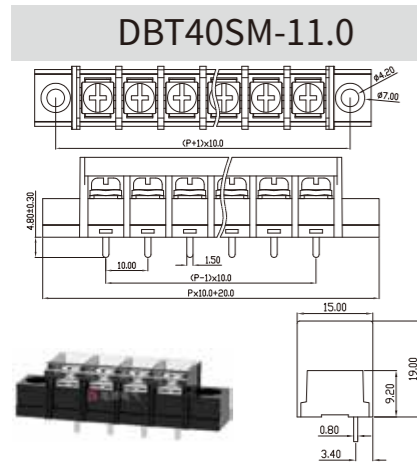

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	600	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

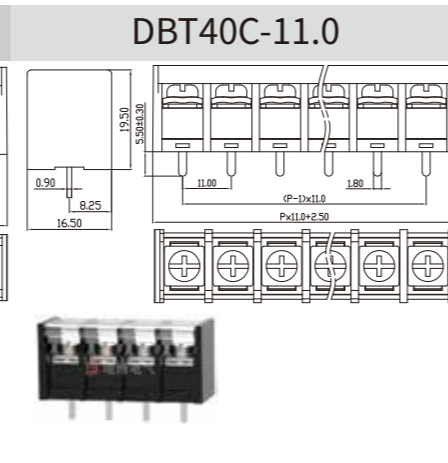
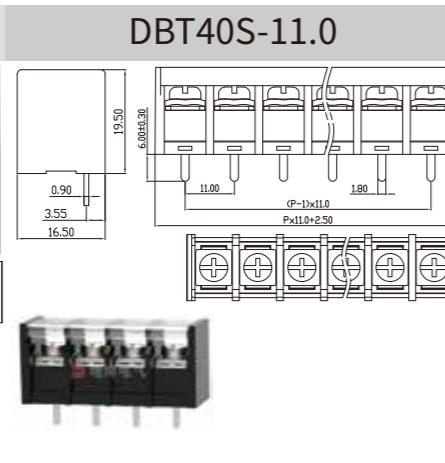
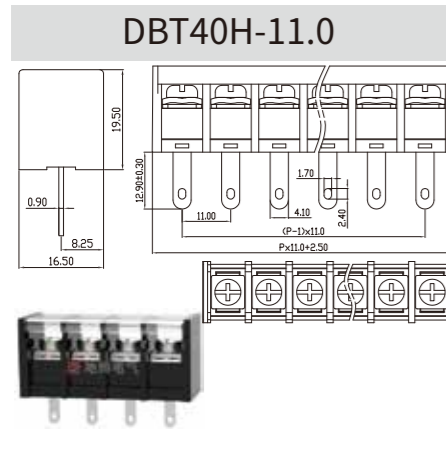


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

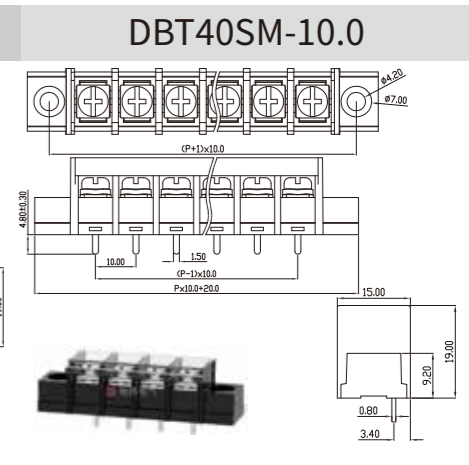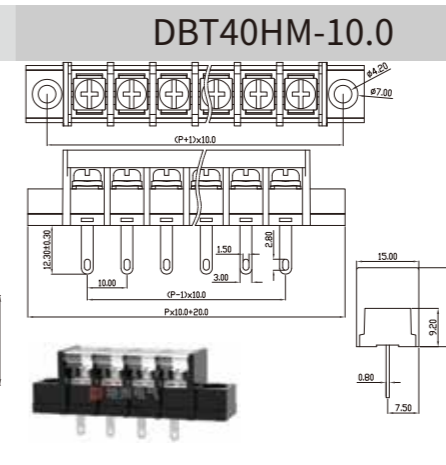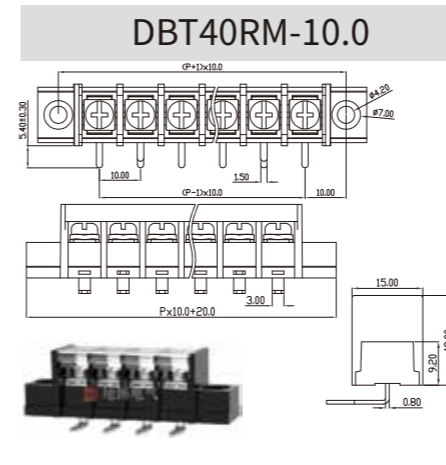

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

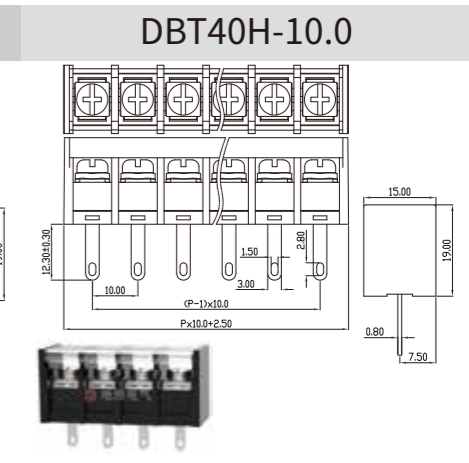
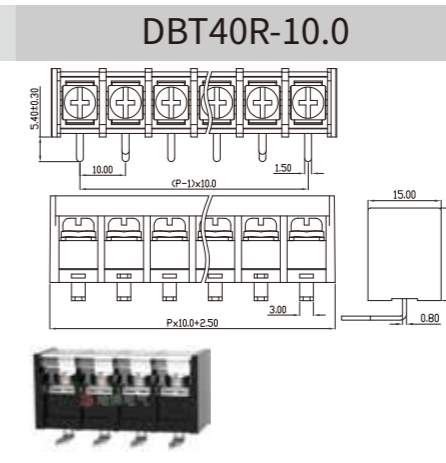
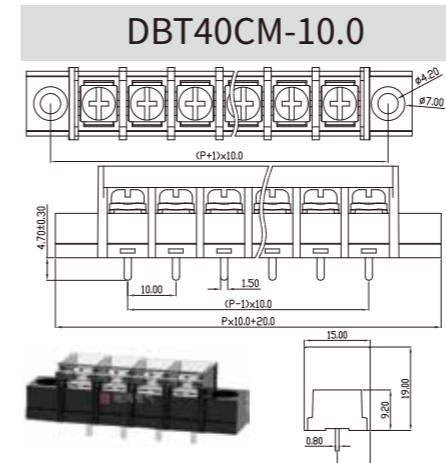


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	30 - -			
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	11.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	230 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

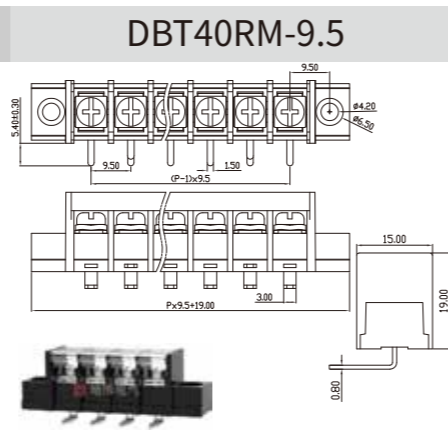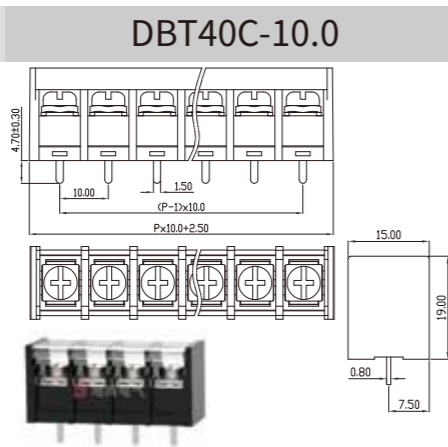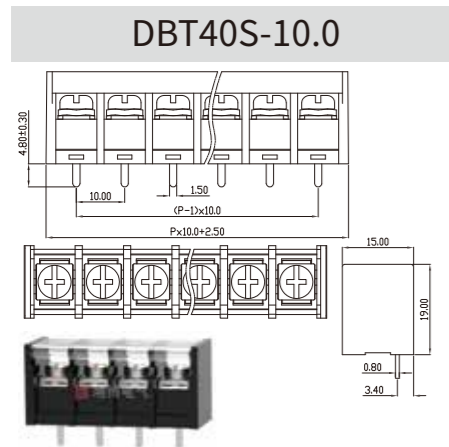

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - 300			
额定电流 Rated Current [A]	20 - 10			
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - 300			
额定电流 Rated Current [A]	20 - 10			
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

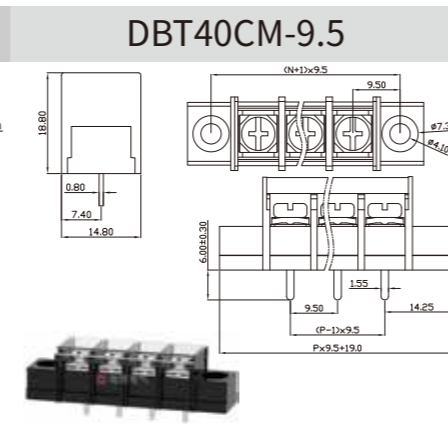
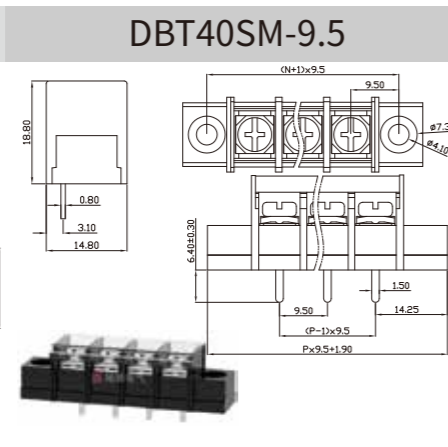
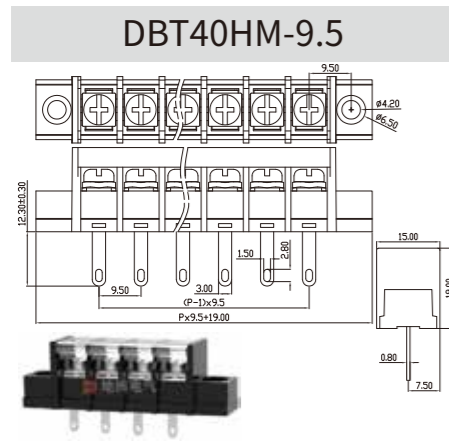


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

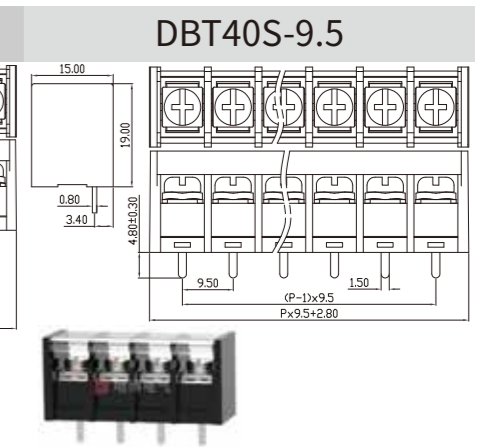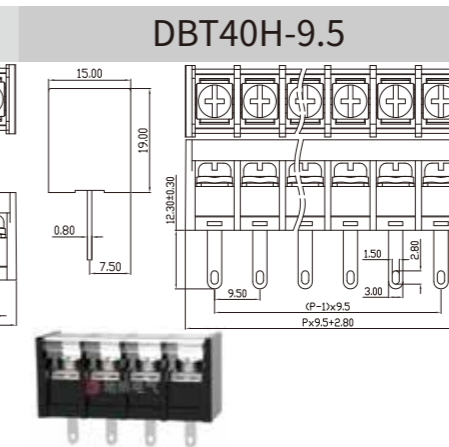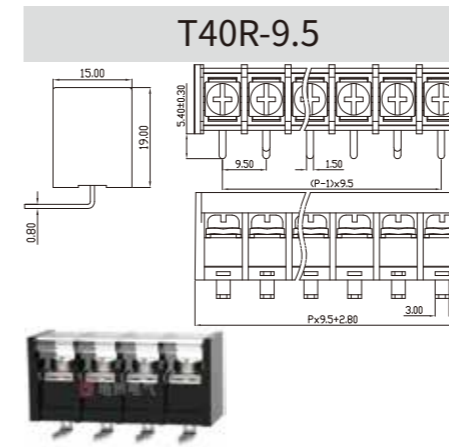

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

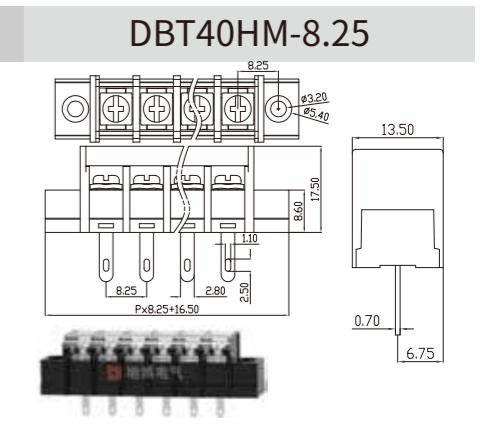
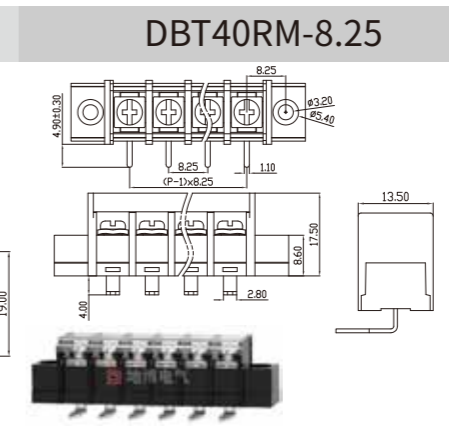
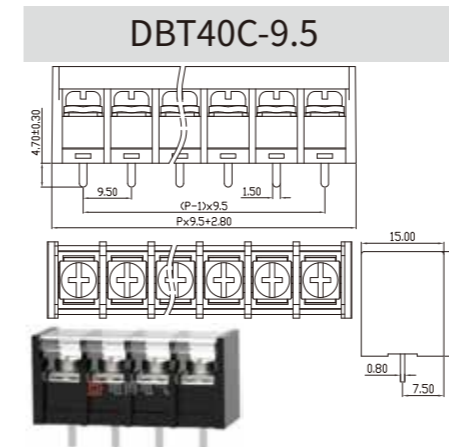


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

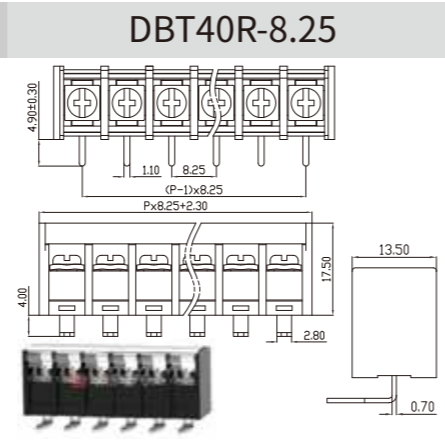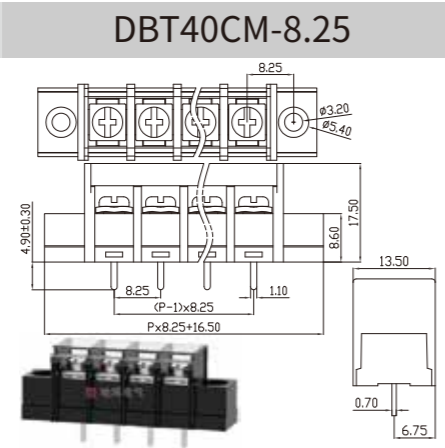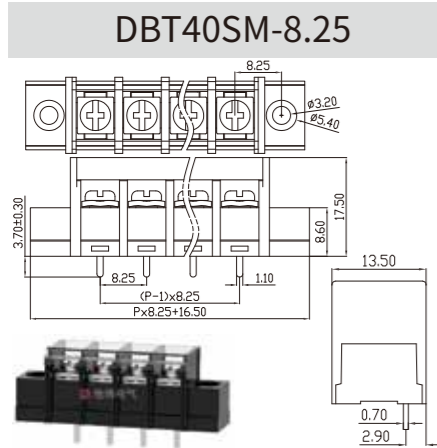

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

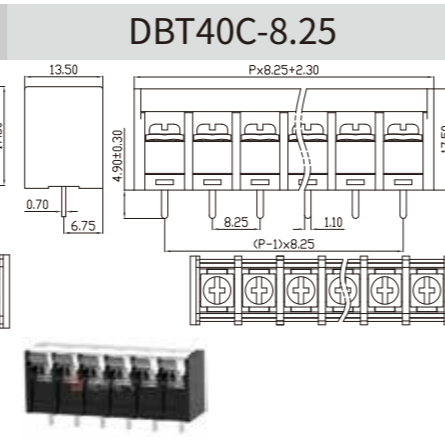
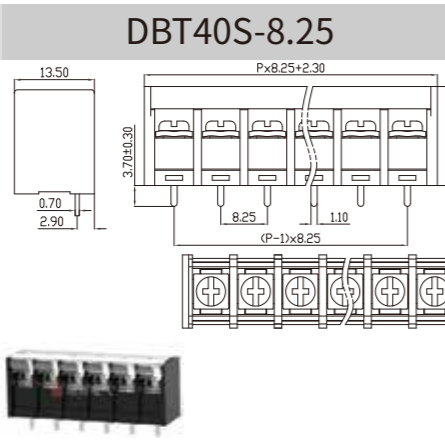
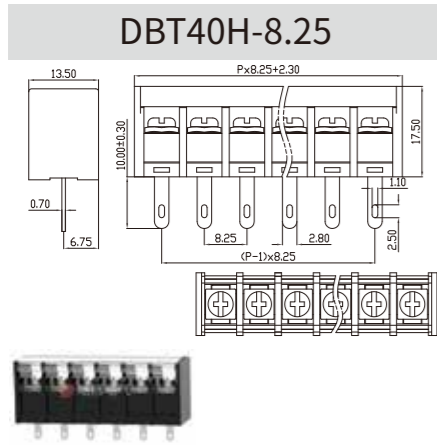


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

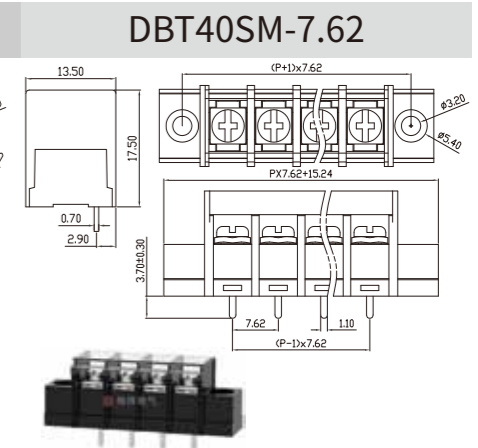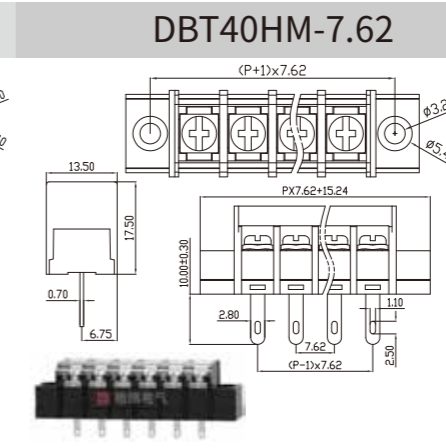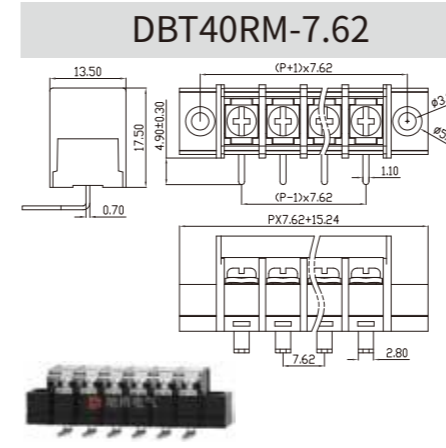

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	15 - -			
接线范围 Wire Range	22-14			
单/多芯线 Solid/Stranded [AWG]	22-14			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

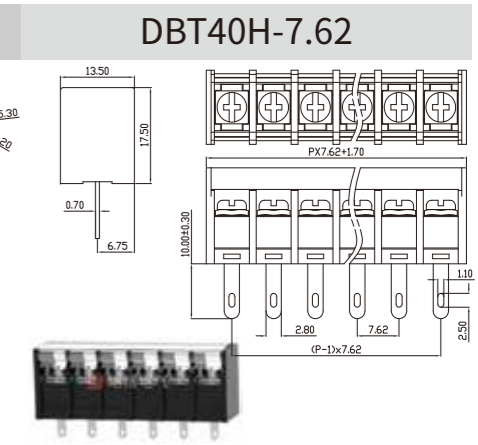
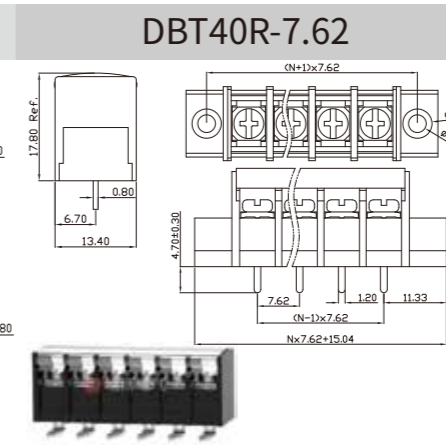
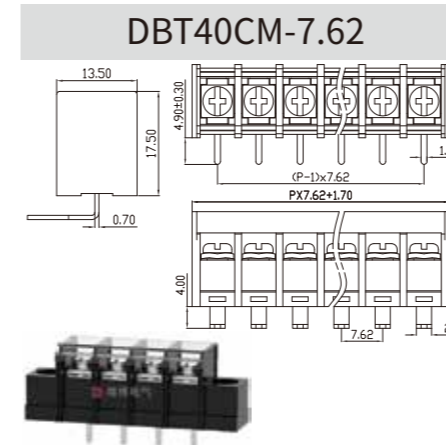


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		15	-	-
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		30	-	5
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

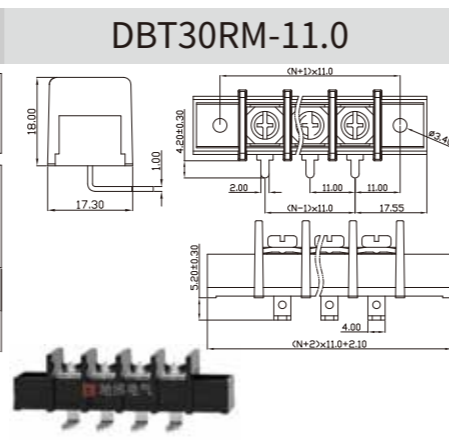
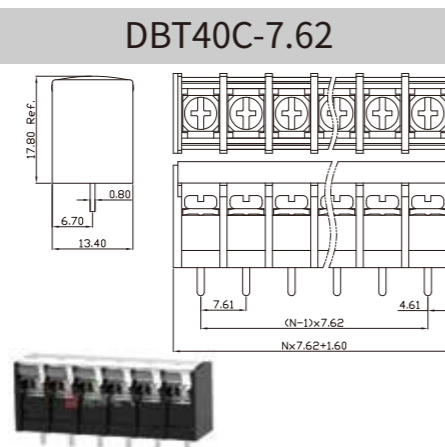
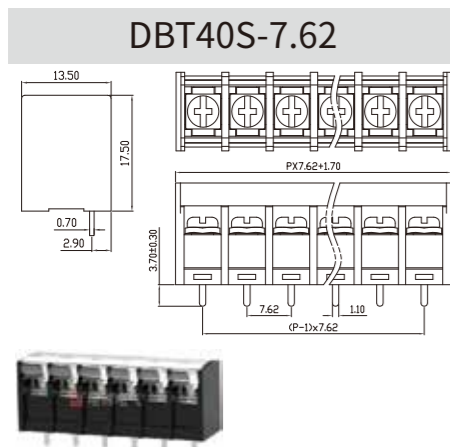


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		30	-	5
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		18-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		18-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

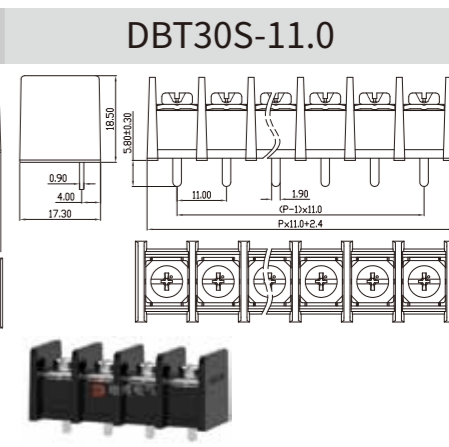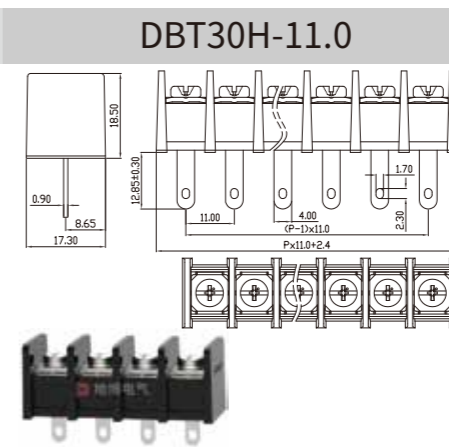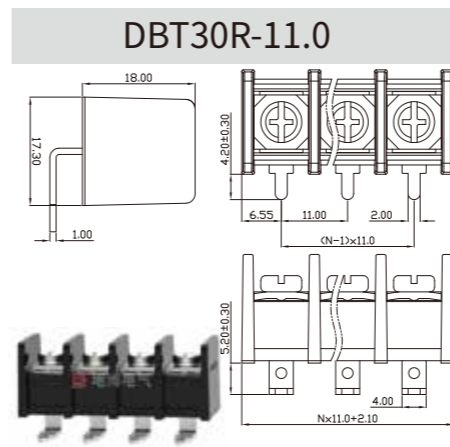

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		18-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		







UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		18-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		30	-	5
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		30	-	5
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		30	-	-
接线范围 Wire Range		18-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		18-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.0		

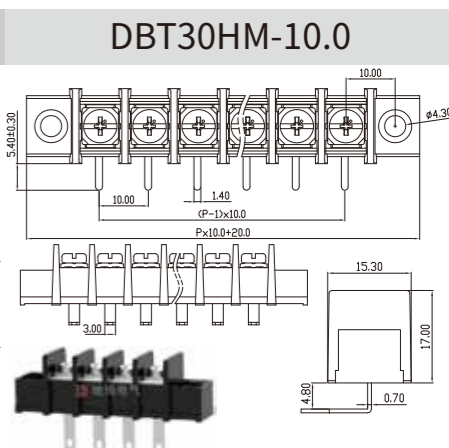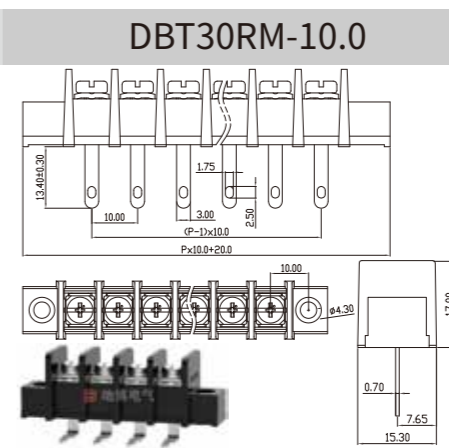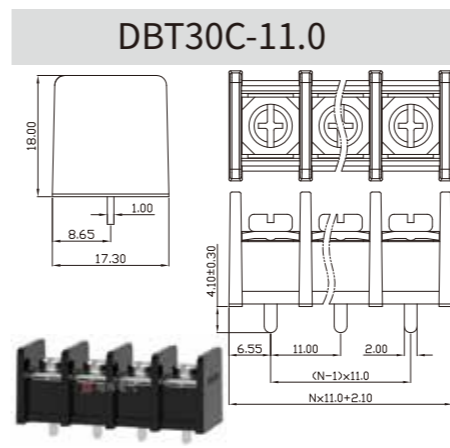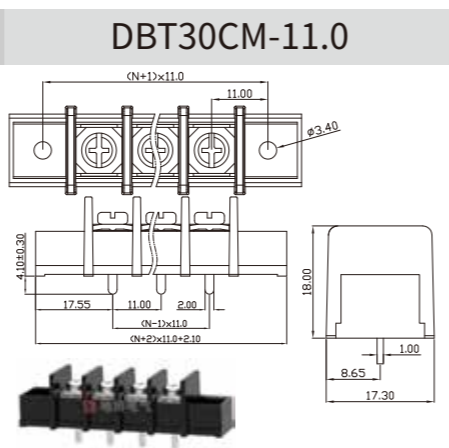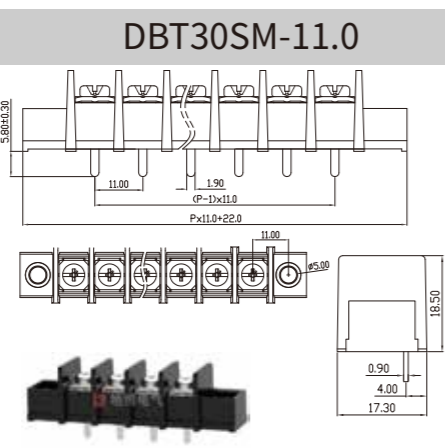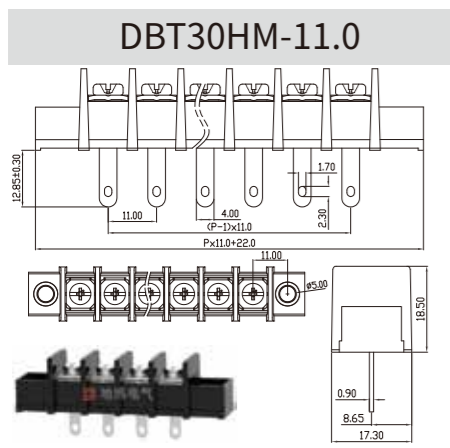


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	30	-	-	
接线范围 Wire Range	18-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			


DBT30SM-10.0

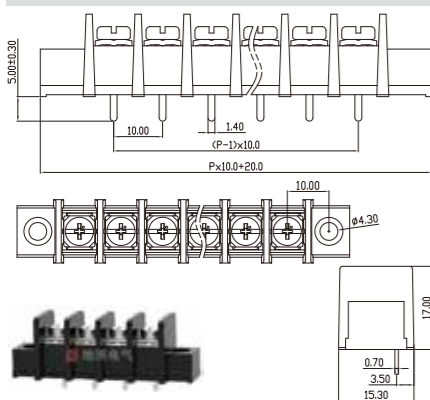


DBT30CM-10.0

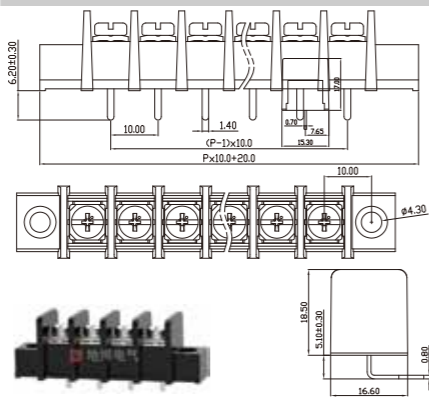


DBT30R-10.0

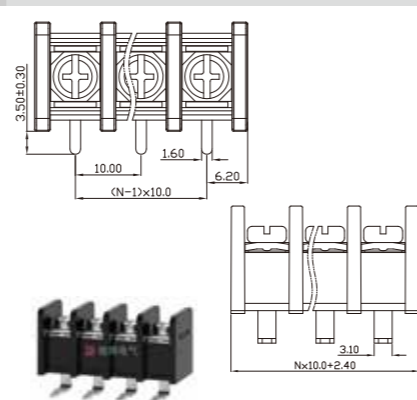


DBT30RM-9.5

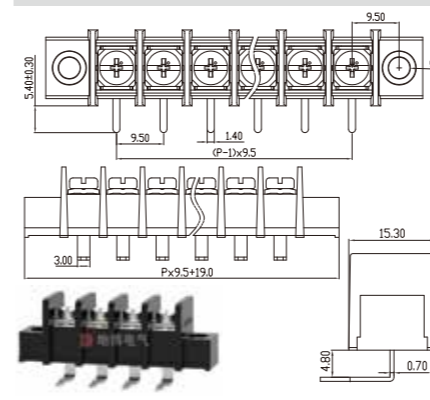

DBT30HM-9.5

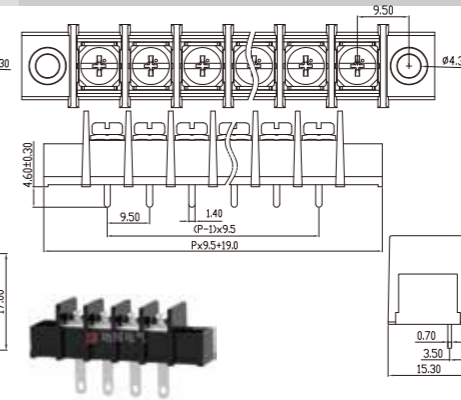

DBT30SM-9.5

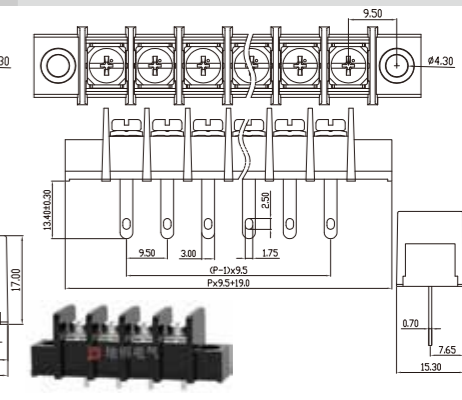

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range	22-10			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2			


DBT30H-10.0

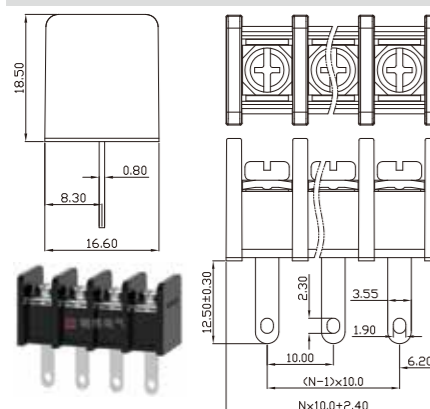


DBT30S-10.0

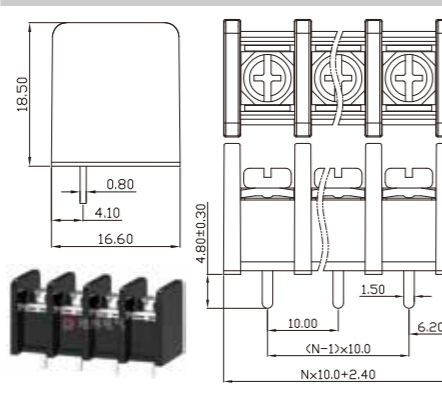


DBT30C-10.0

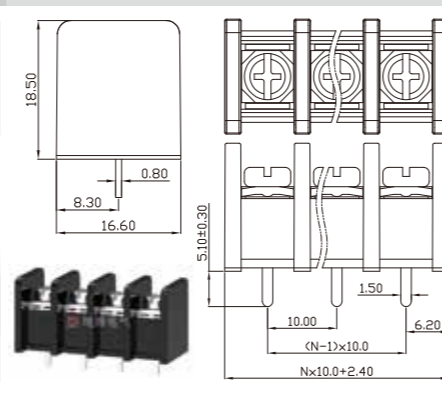


DBT30CM-9.5

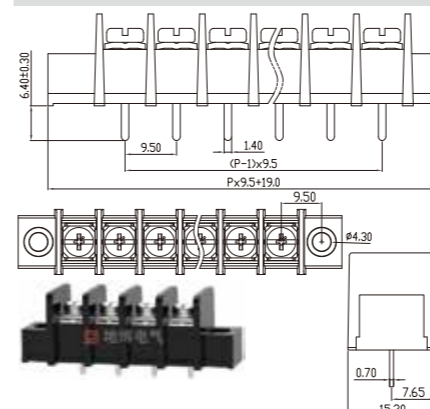

DBT30R-9.5

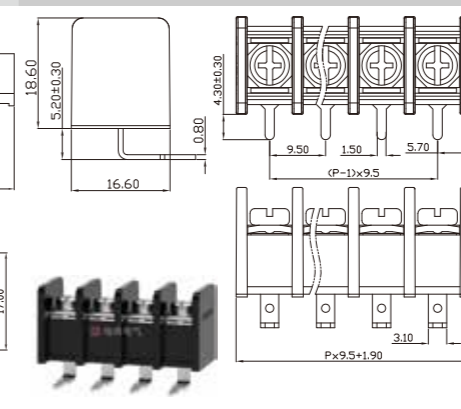

DBT30H-9.5

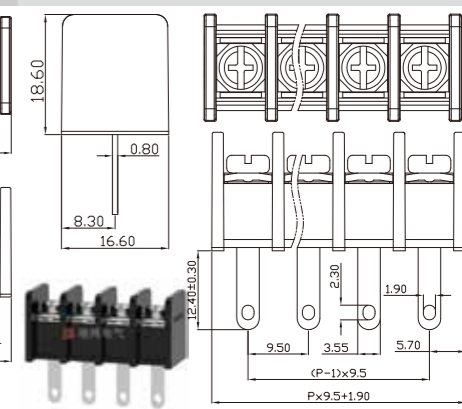

# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	20	-	-	
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	9.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0			

# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

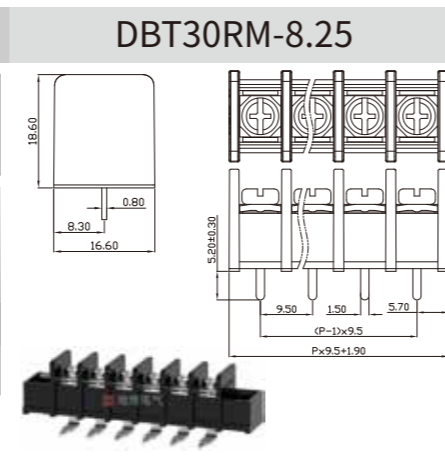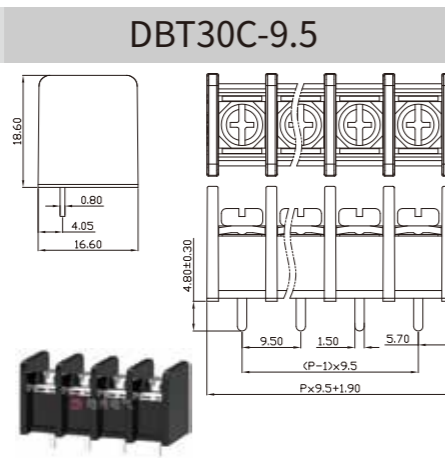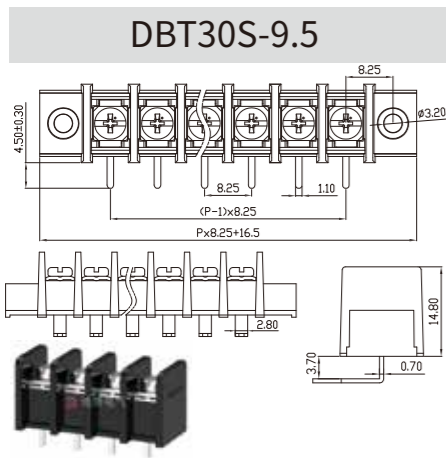

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

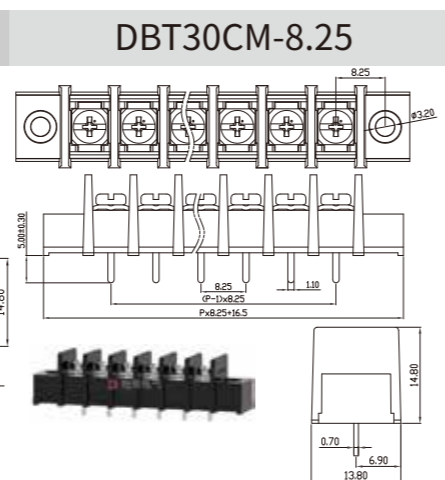
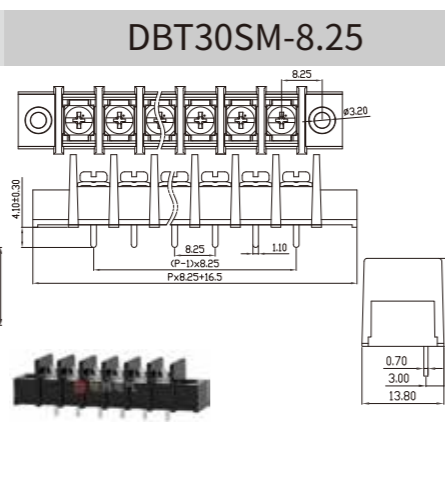
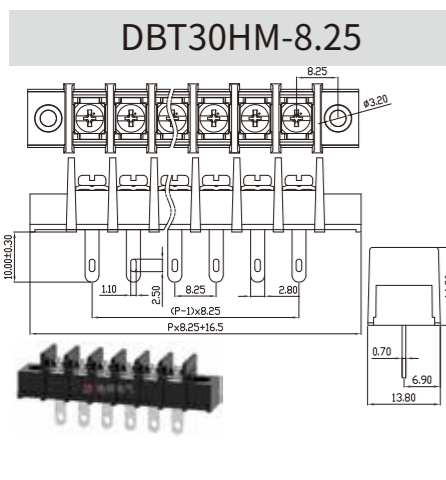


# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		12	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

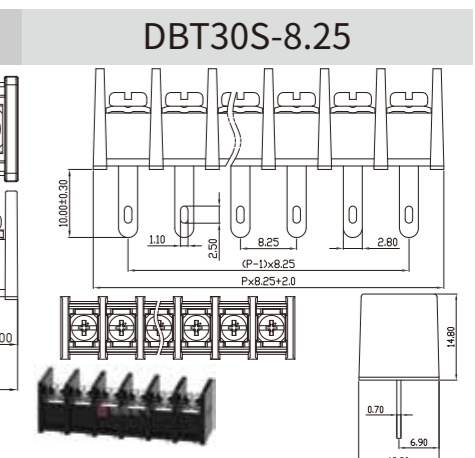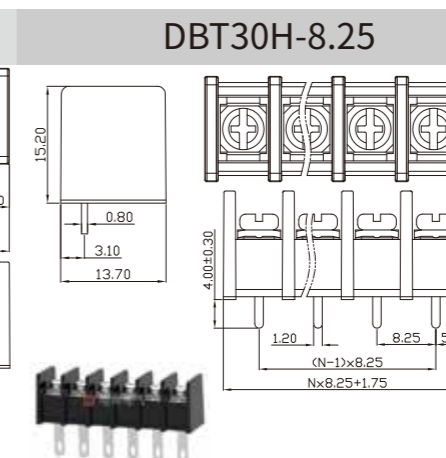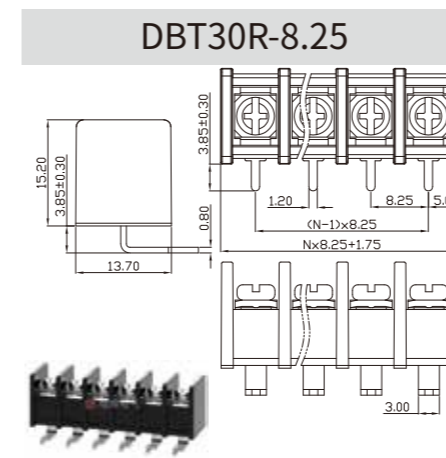

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		15	-	-
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

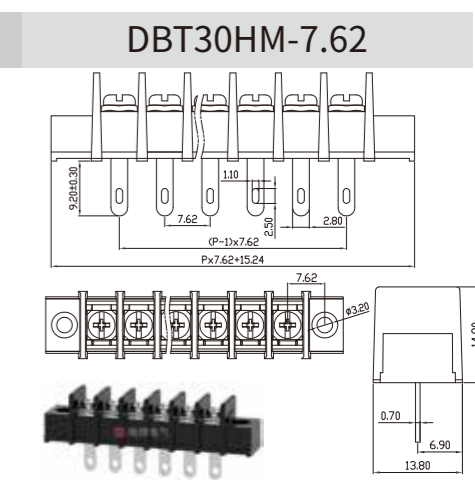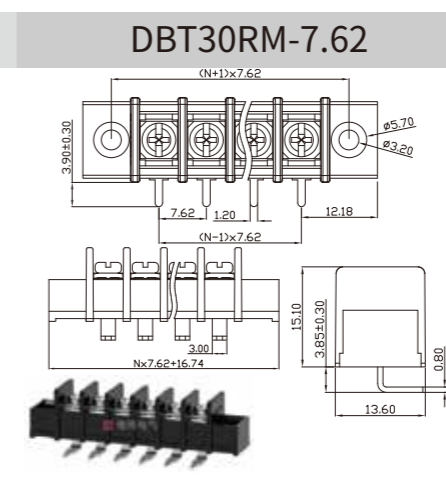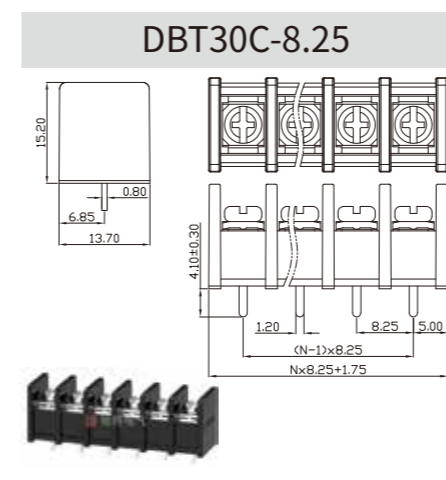

# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DBT30SM-7.62

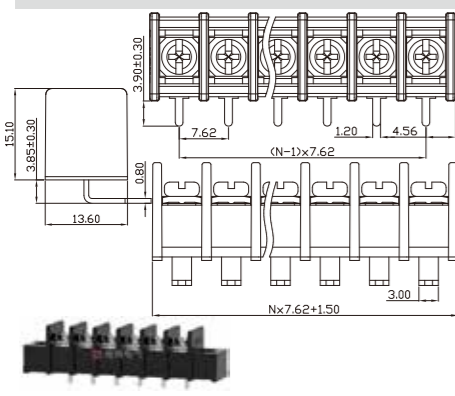


DBT30CM-7.62

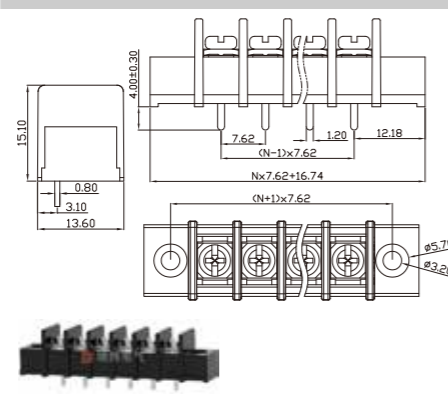


DBT30R-7.62

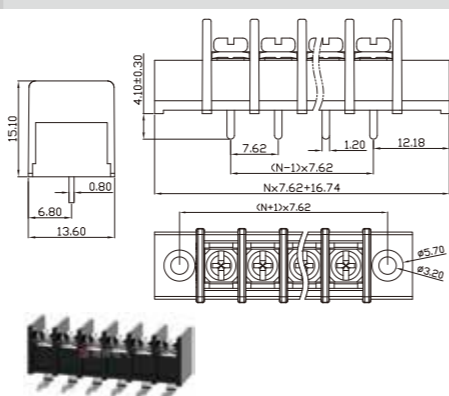


DBT10-10.0

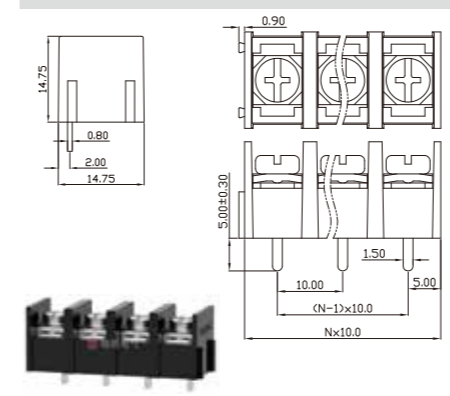

DBT10-8.5

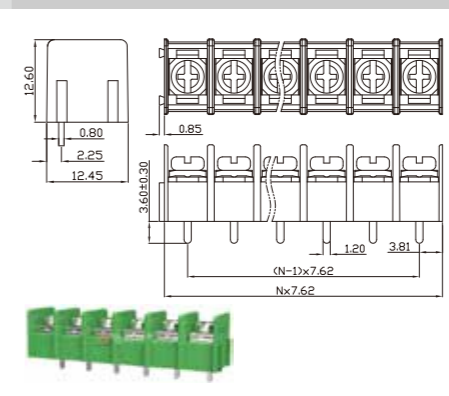

DBT10-7.62

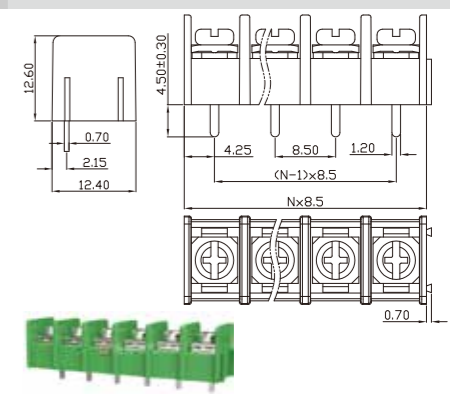

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DBT30H-7.62

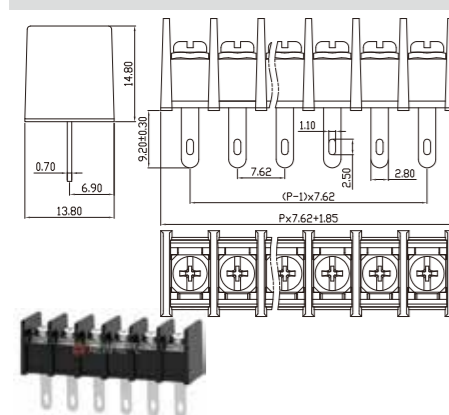

DBT30S-7.62

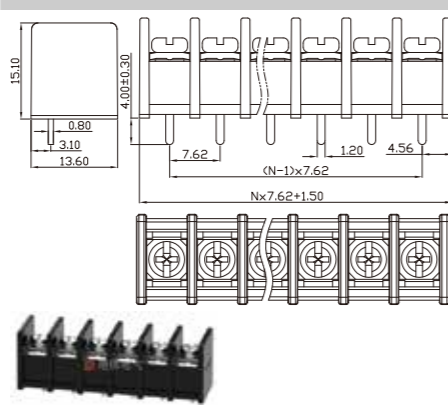

DBT30C-7.62

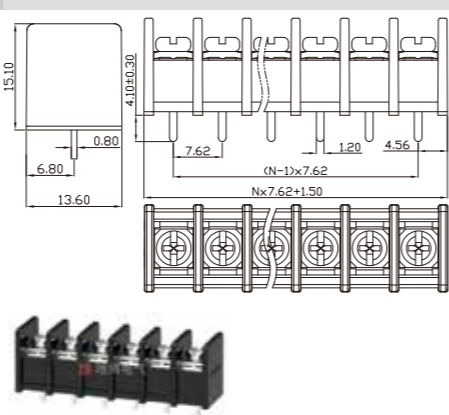

# 栅栏式端子台 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

Spring-type terminal block

# 弹簧式端子台

Spring type PCB wiring terminals, with cage and V-shaped spring connection methods, have vibration resistance characteristics and can be connected with a cross-sectional area of 0.08mm<sup>2</sup> To 16mm<sup>2</sup>. All types of wires with a spacing of 2.5mm to 10.16mm are available for selection, and can be used interchangeably with screw connected PCB wiring terminals, increasing flexibility Sex. The product design complies with international standards such as IEC60998 and UL1059. Has obtained UL certification in the United States.

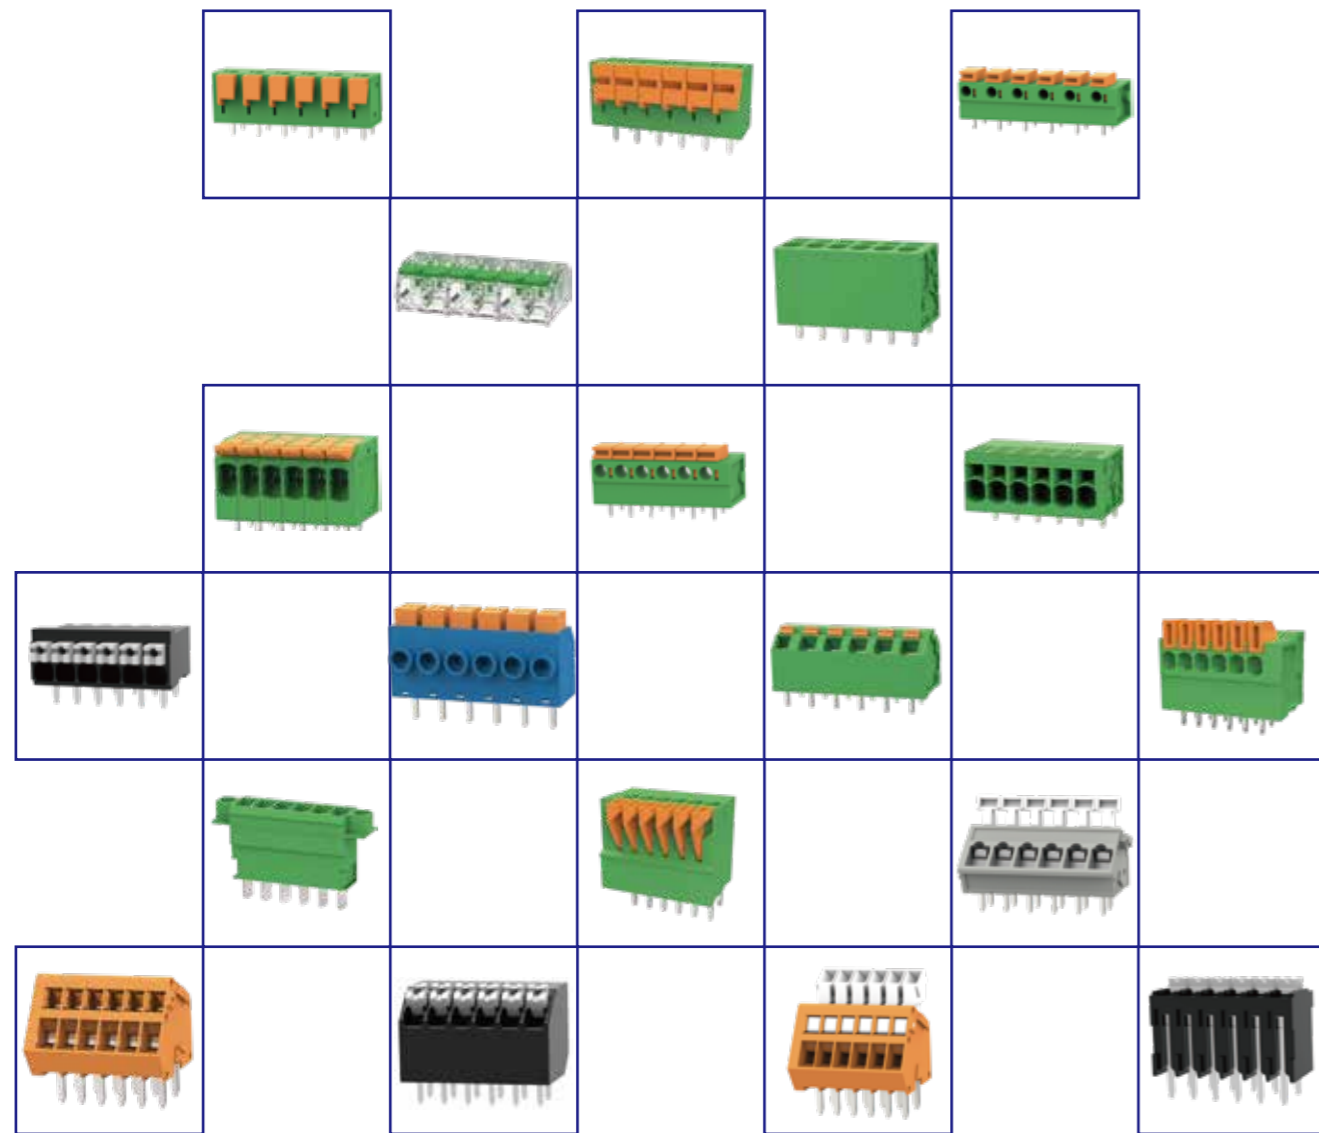


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		8-24		
单/多芯线 Solid/Stranded [AWG]		8-24		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		6	6	-
接线范围 Wire Range		18-4		
单/多芯线 Solid/Stranded [AWG]		18-4		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

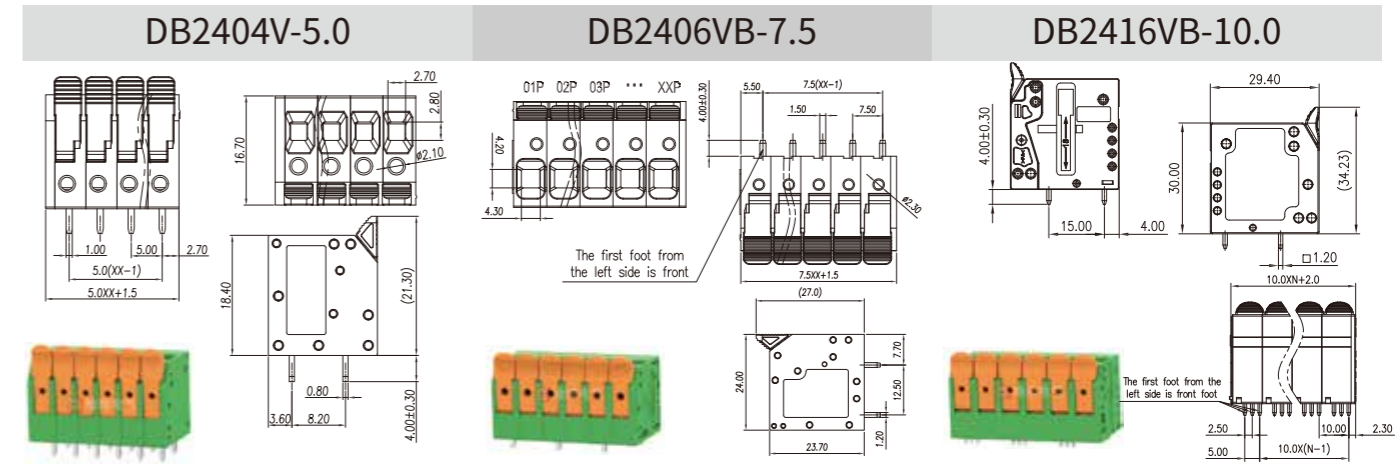

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		66	66	-
接线范围 Wire Range		18-4		
单/多芯线 Solid/Stranded [AWG]		18-4		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		8-24		
单/多芯线 Solid/Stranded [AWG]		8-24		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

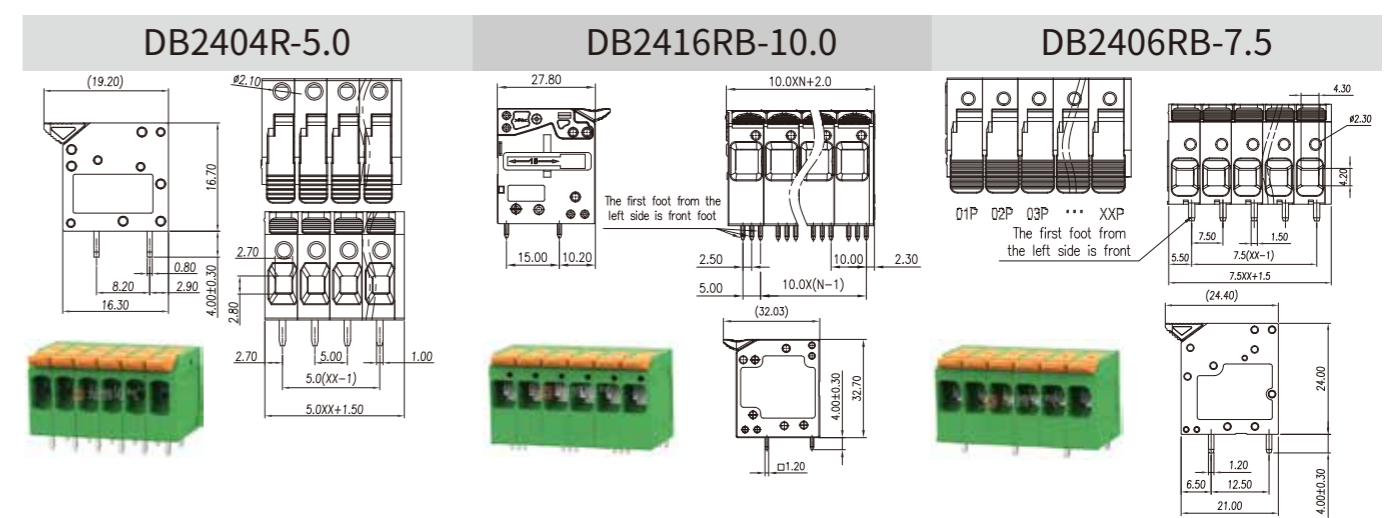






# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 - -	150	-	-
额定电流 Rated Current [A]	4 - -	4	-	-
接线范围 Wire Range	26-18	26-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	2.54	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 600	600	600	600
额定电流 Rated Current [A]	27 27 5	27	27	5
接线范围 Wire Range	10-14	10-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	7.5	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	70 - -	70	-	-
接线范围 Wire Range	18-4	18-4		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

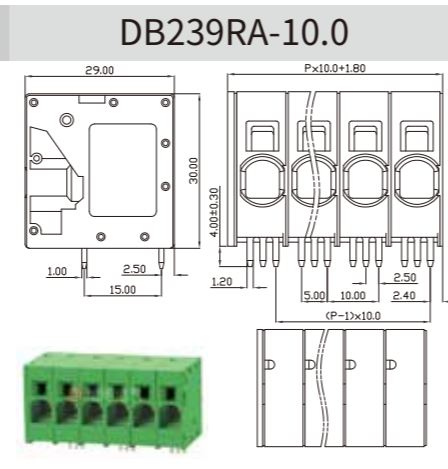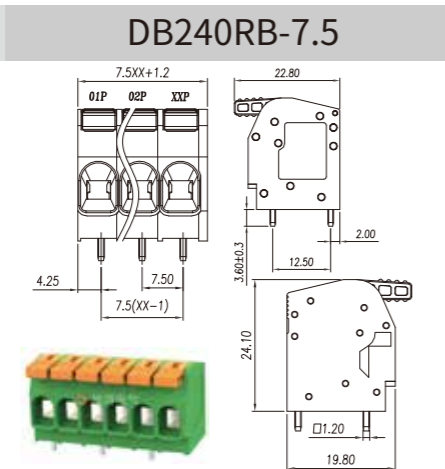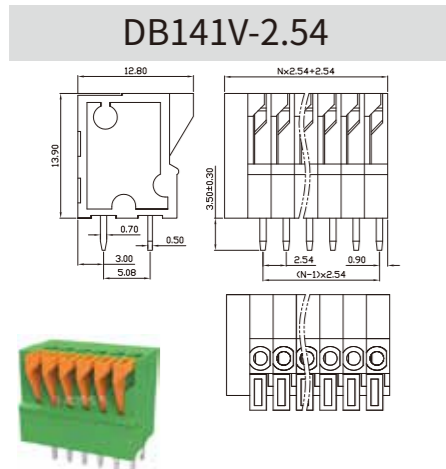

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 - -	600	-	-
额定电流 Rated Current [A]	30 - -	30	-	-
接线范围 Wire Range	24-12	24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	7.5	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	70 - -	70	-	-
接线范围 Wire Range	18-4	18-4		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.0	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 - -	600	-	-
额定电流 Rated Current [A]	30 - -	30	-	-
接线范围 Wire Range	24-10	24-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	7.5	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

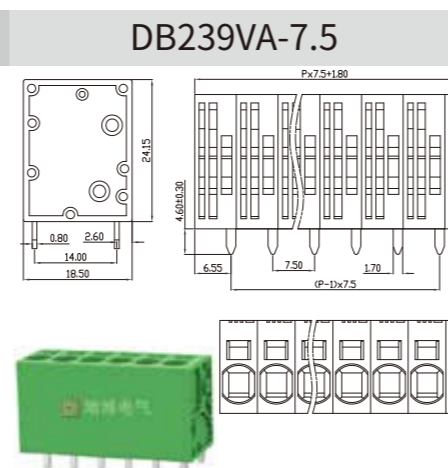
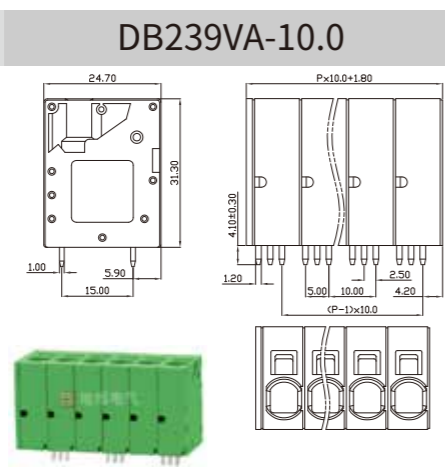
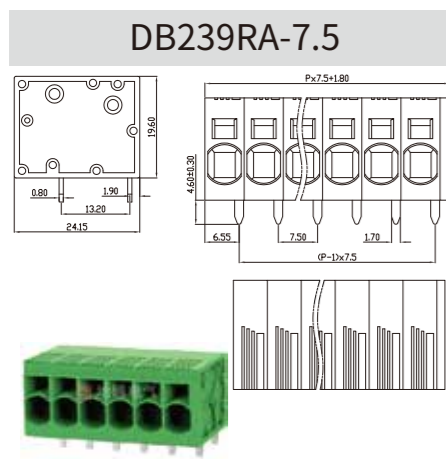


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 15	20	-	15
接线范围 Wire Range	24-12	24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	24-16	24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 15	20	-	15
接线范围 Wire Range	24-12	24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

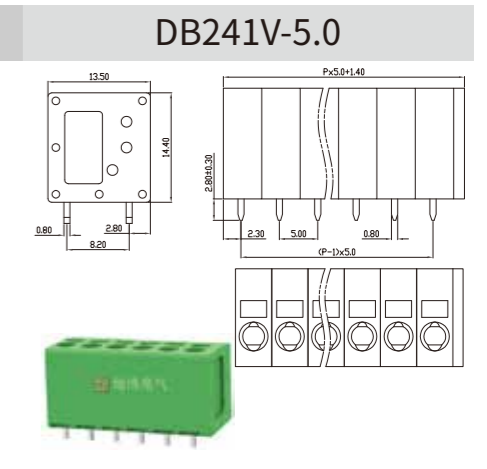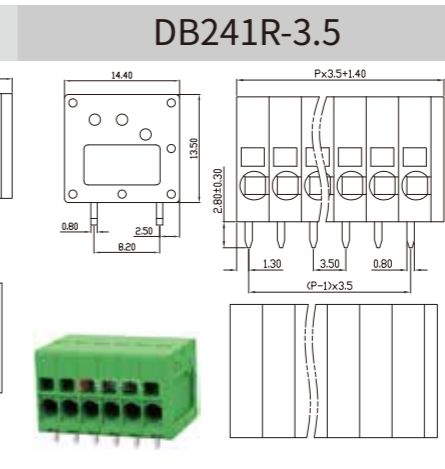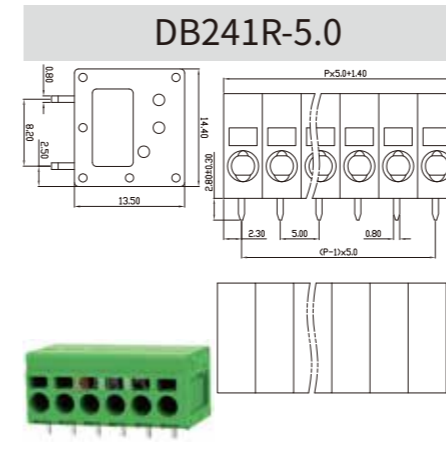

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	24-16	24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	12 - -	12	-	-
接线范围 Wire Range	26-12	26-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 600	600	600	600
额定电流 Rated Current [A]	41 41 5	41	41	5
接线范围 Wire Range	8-24	8-24		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	7.62	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

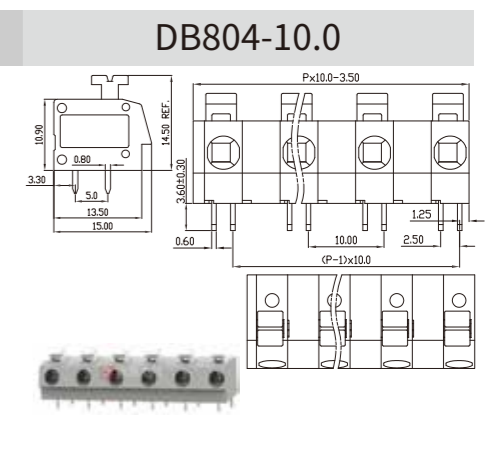
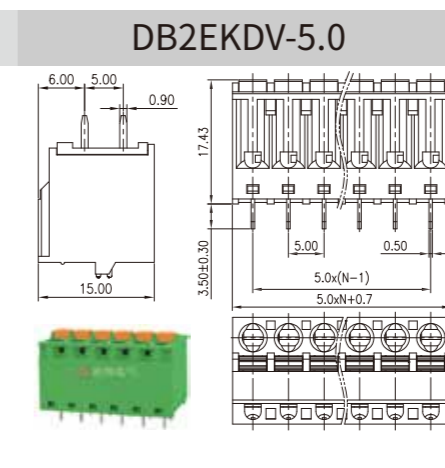
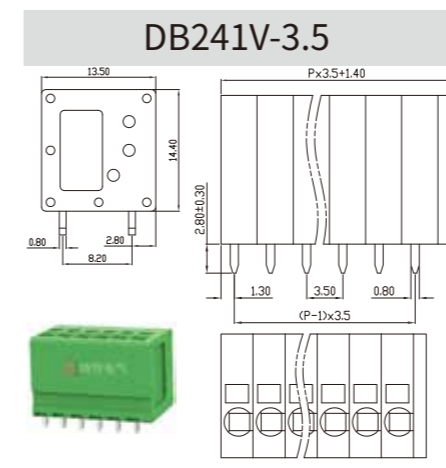


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

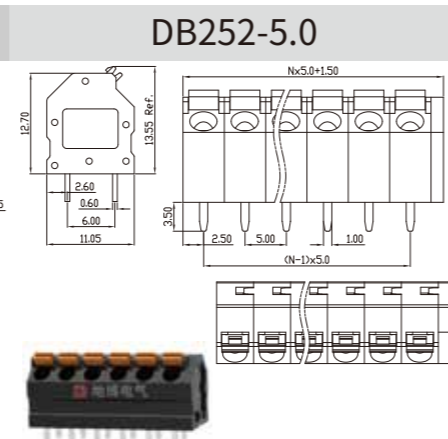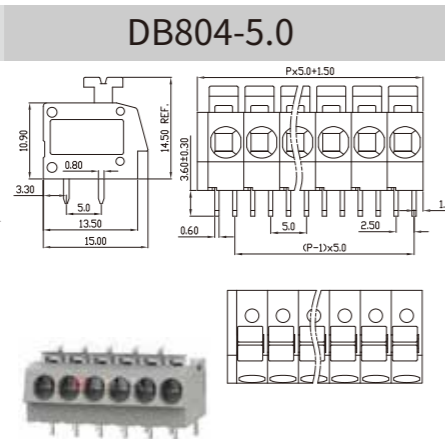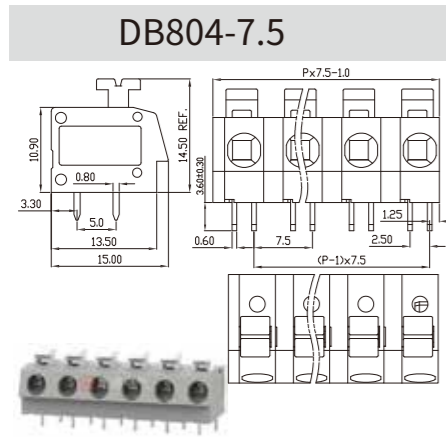

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		30-16		
单/多芯线 Solid/Stranded [AWG]		30-16		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

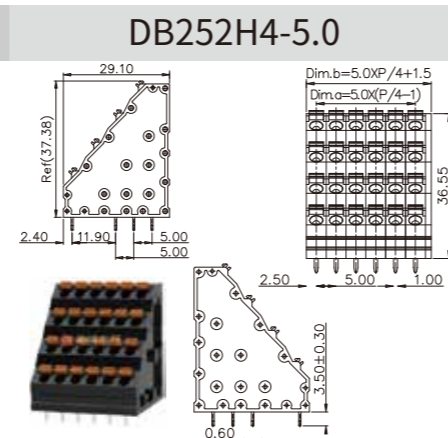
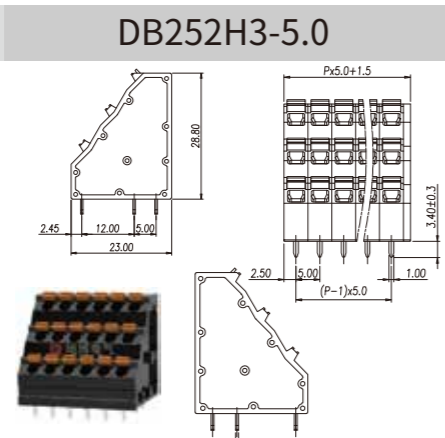
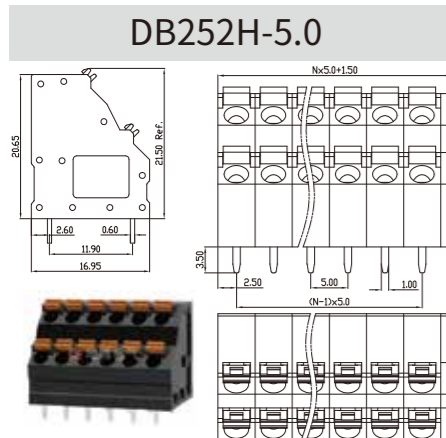


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		8	-	-
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		140	-	-
额定电流 Rated Current [A]		4	-	-
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		8	-	-
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

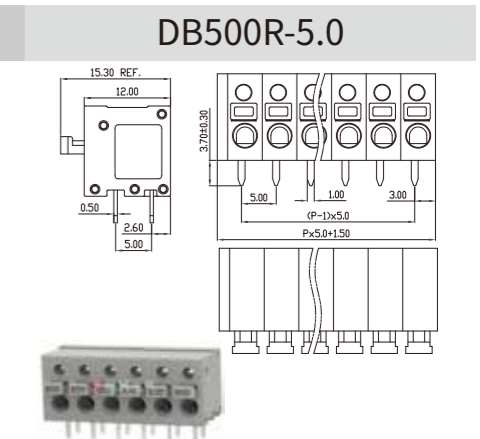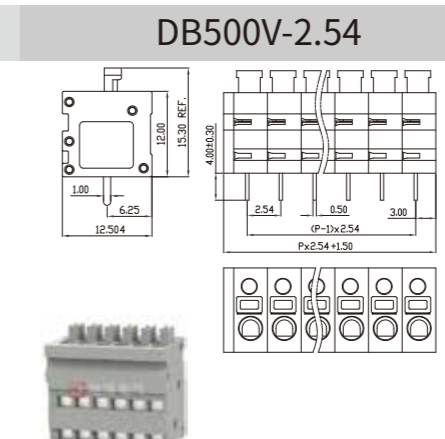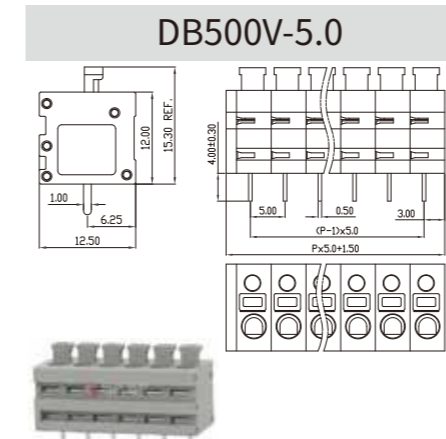

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		140	-	-
额定电流 Rated Current [A]		4	-	-
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-16		
单/多芯线 Solid/Stranded [AWG]		22-16		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		8	-	-
接线范围 Wire Range		22-18		
单/多芯线 Solid/Stranded [AWG]		22-18		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

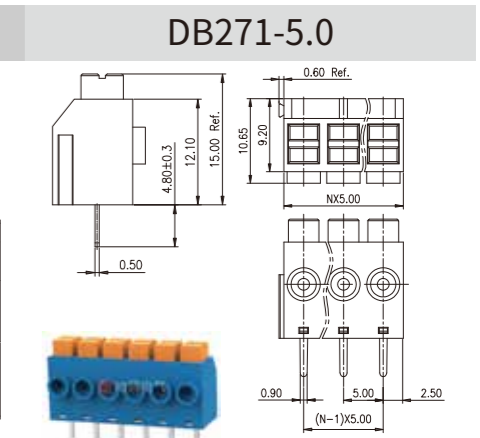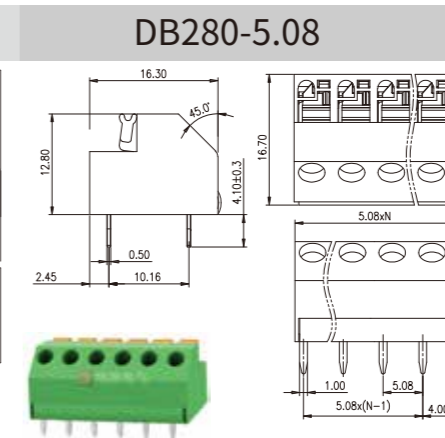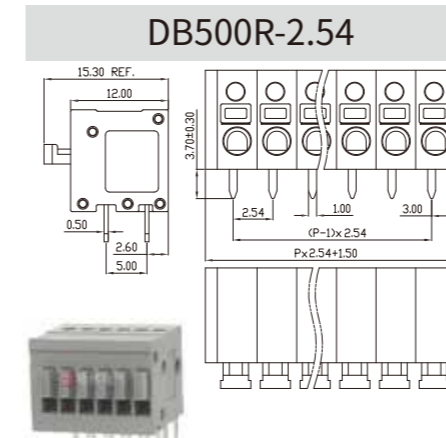

# 弹簧式端子台 Spring-type terminal block

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB270-7.5

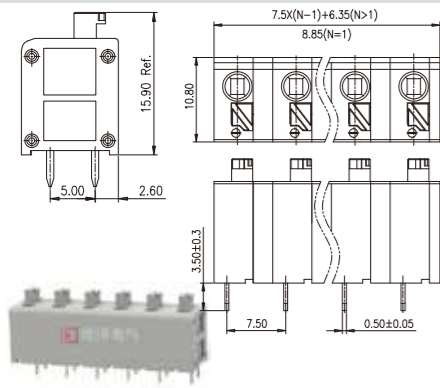

DB270-5.0

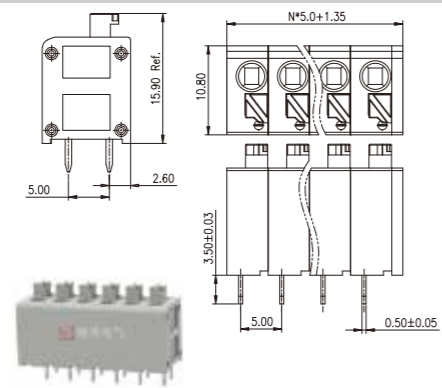

DB270-3.81

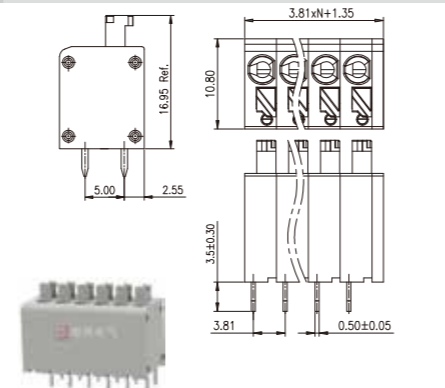

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB260W-10.0

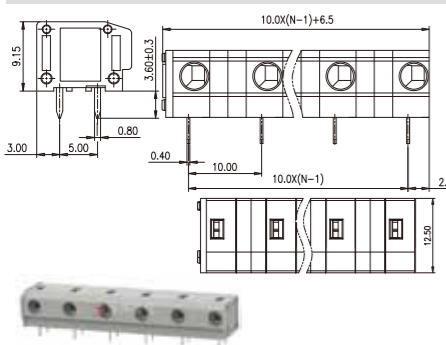

DB260W-7.5

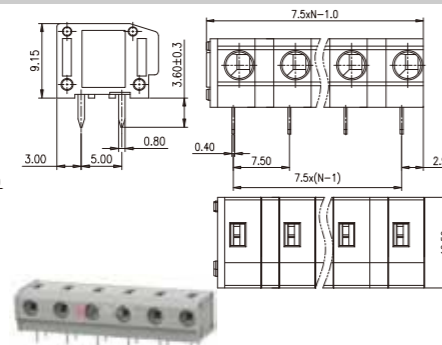

DB260W-5.0

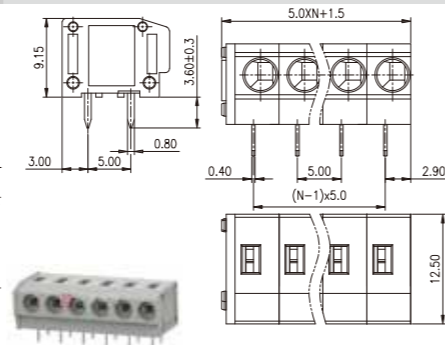

# 弹簧式端子台 Spring-type terminal block

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	20-14		
单/多芯线 Solid/Stranded [AWG]	20-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	5	-	5
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB260-10.0

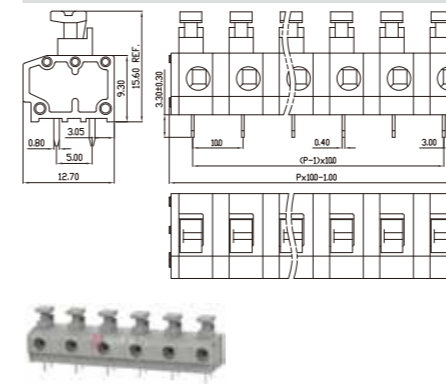

DB260-7.5

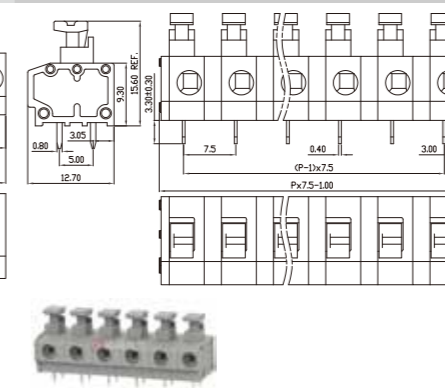

DB260-5.0

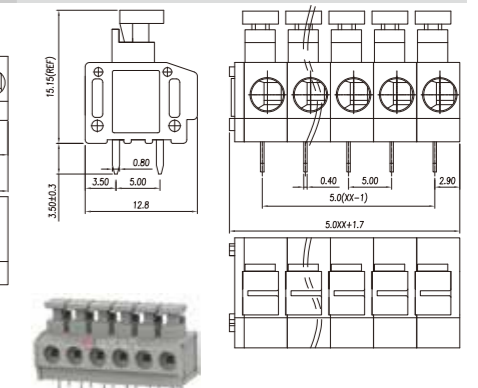

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	20-14		
单/多芯线 Solid/Stranded [AWG]	20-14		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	4	4	-
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	4	4	-
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB260-3.81

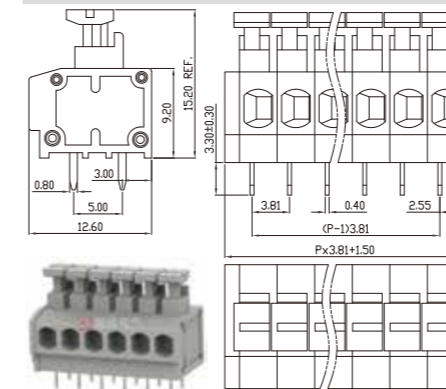

DB250WB-3.5

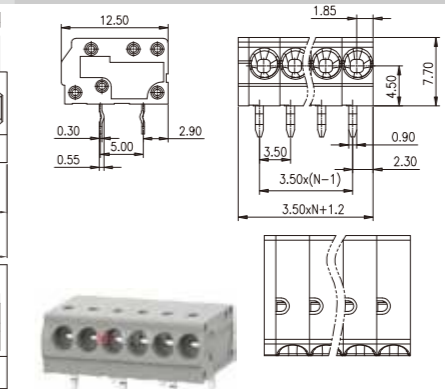

DB250WA-3.5



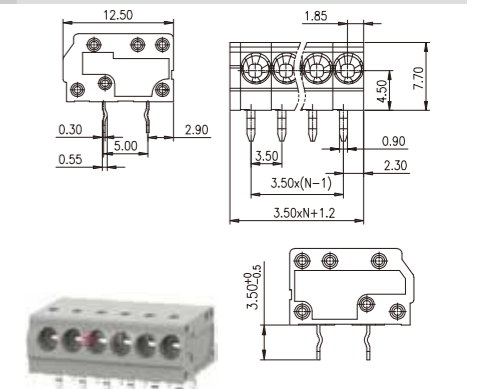


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	7.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	7.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	600
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-16		
单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

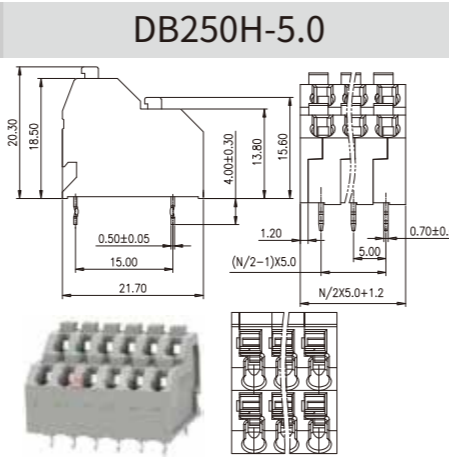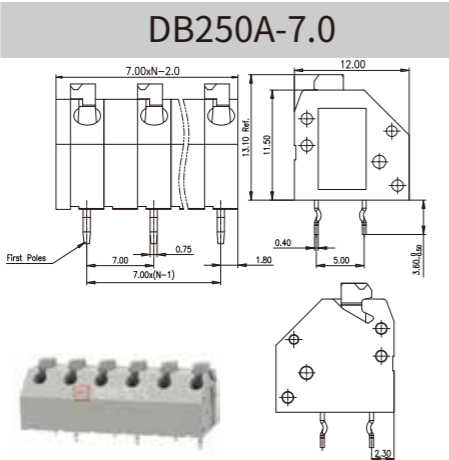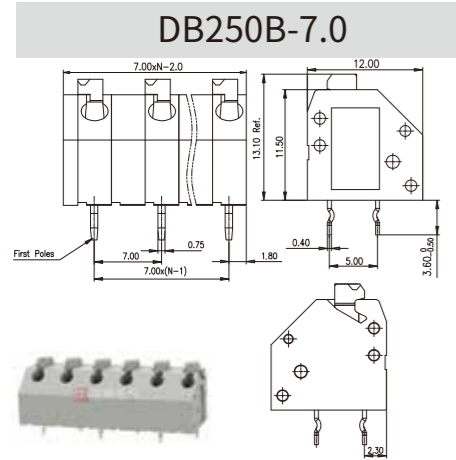

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	2	2	2
接线范围 Wire Range	24-20		
单/多芯线 Solid/Stranded [AWG]	24-20		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

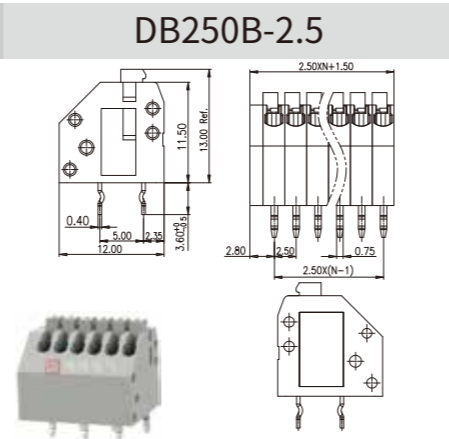
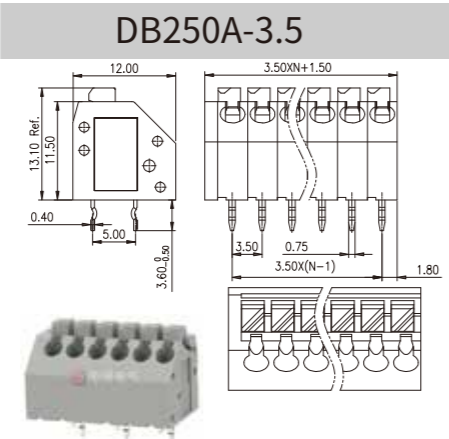
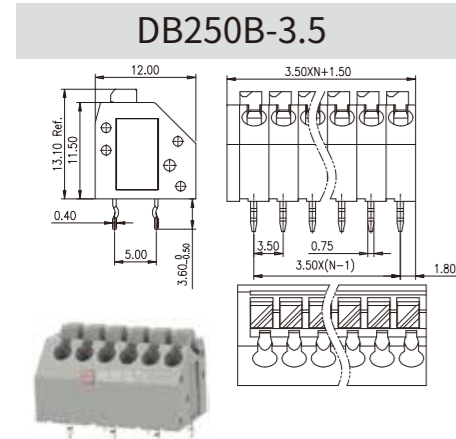


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	2	2	2
接线范围 Wire Range	24-20		
单/多芯线 Solid/Stranded [AWG]	24-20		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	150	150
额定电流 Rated Current [A]	4	4	4
接线范围 Wire Range	28-20		
单/多芯线 Solid/Stranded [AWG]	28-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	150	150
额定电流 Rated Current [A]	4	4	4
接线范围 Wire Range	28-20		
单/多芯线 Solid/Stranded [AWG]	28-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

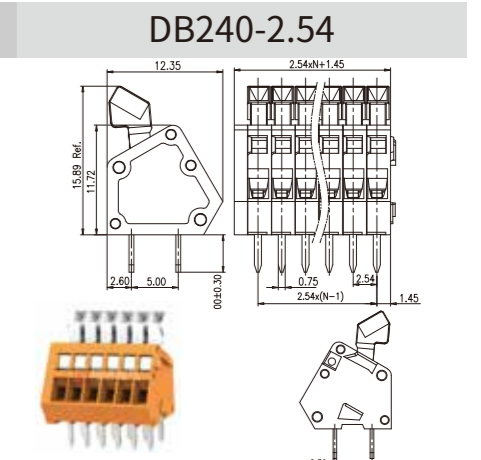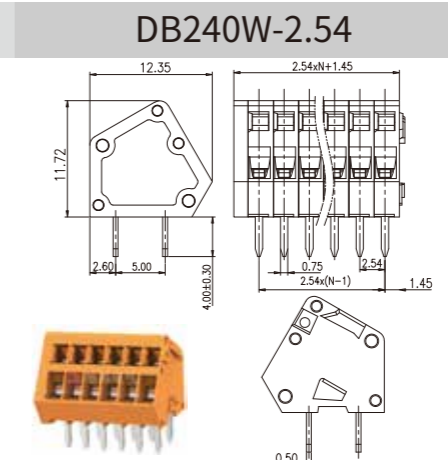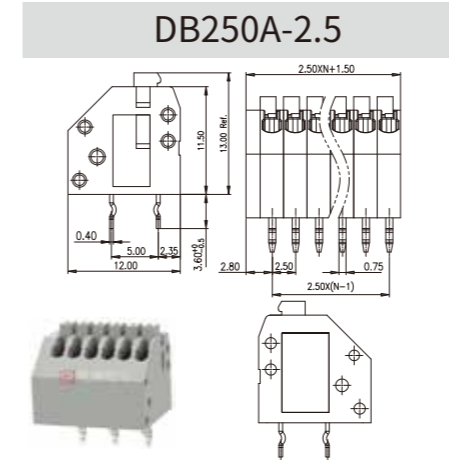

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	8	-	-
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	8	-	-
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	66	66	10
接线范围 Wire Range	28-4		
单/多芯线 Solid/Stranded [AWG]	28-4		
间距 Pitch [mm]	10.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

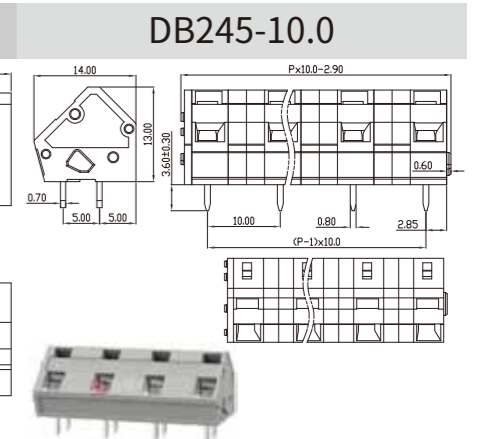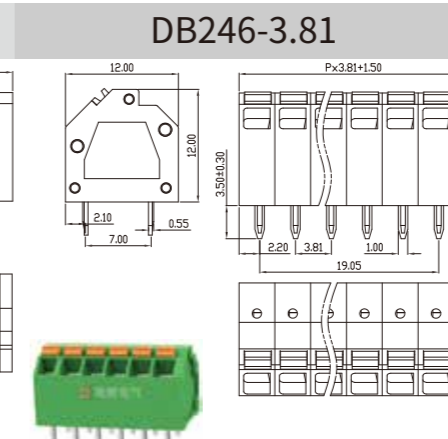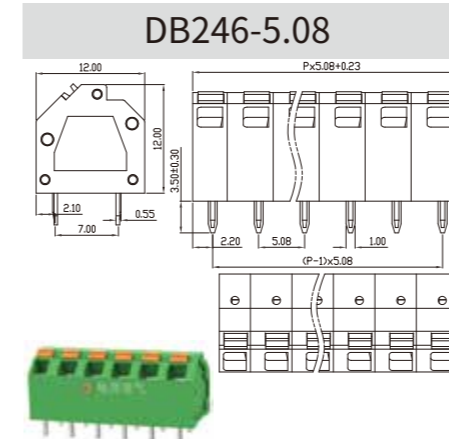


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

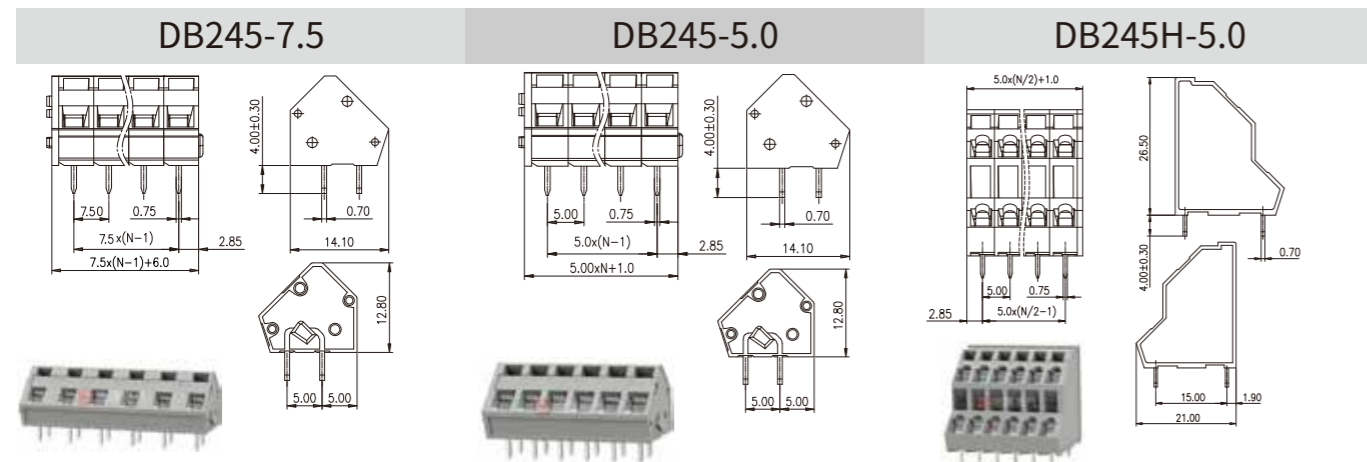

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

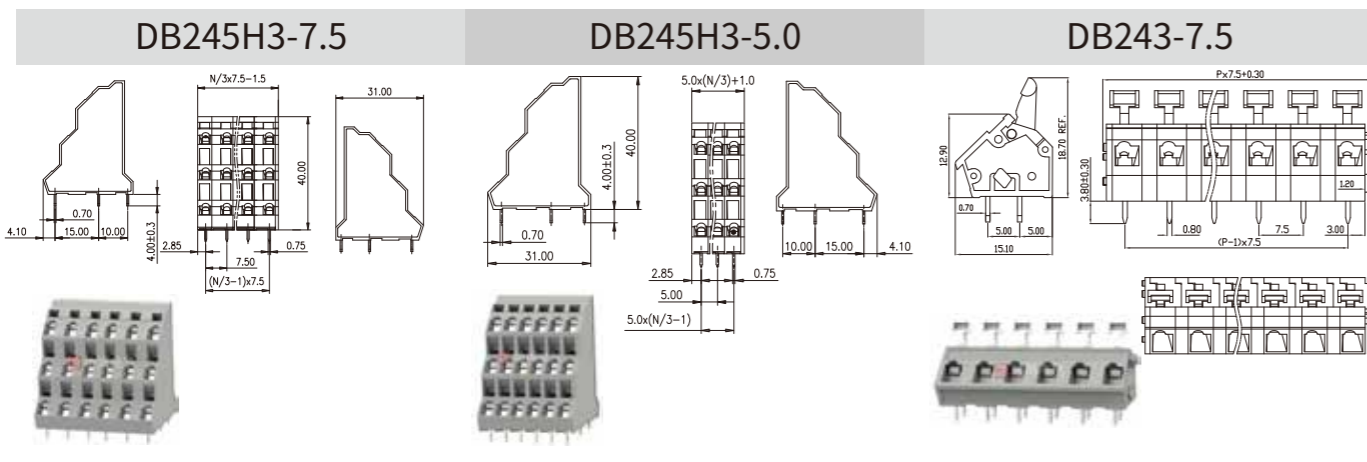


# 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-18		
单/多芯线 Solid/Stranded [AWG]		22-18		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		4	-	-
接线范围 Wire Range		26-18		
单/多芯线 Solid/Stranded [AWG]		26-18		
间距 Pitch [mm]		2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		6	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

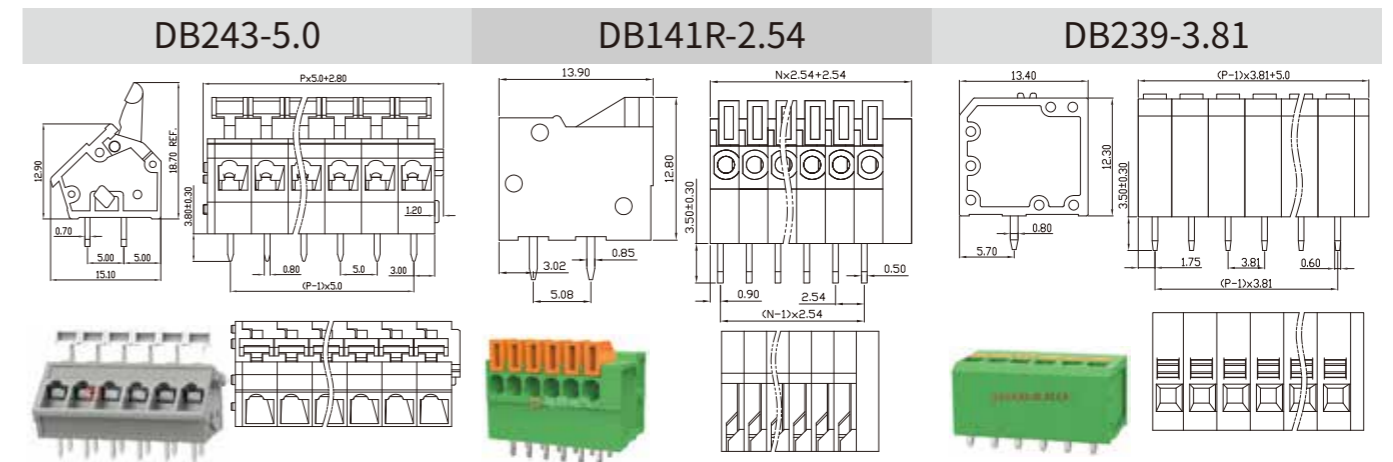

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

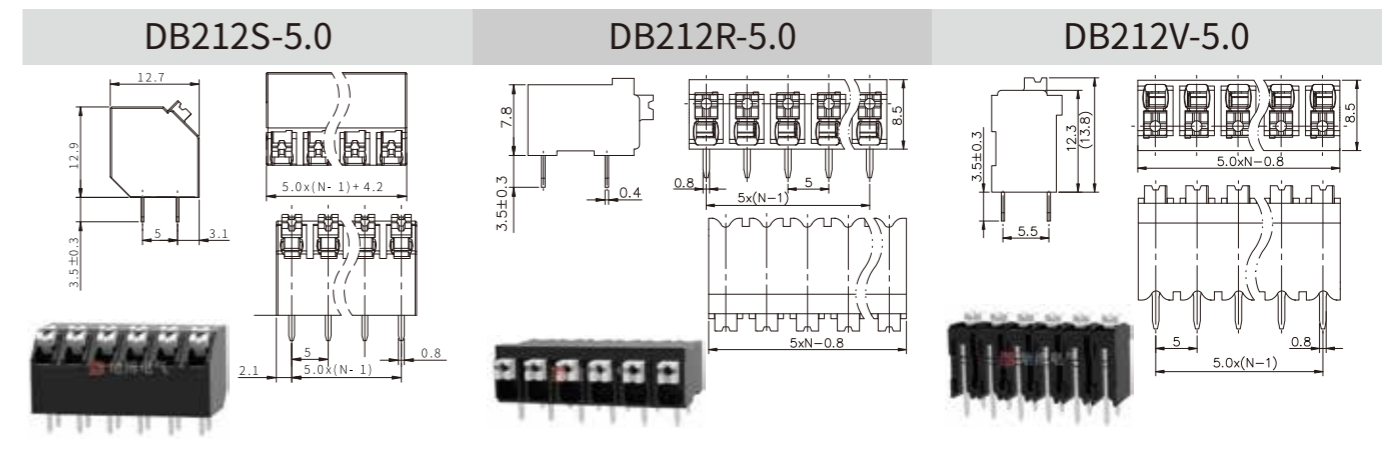


## 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10	额定电流 Rated Current [A]	12	-	10	额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	28-14			接线范围 Wire Range	28-14			接线范围 Wire Range	28-14		
单/多芯线 Solid/Stranded [AWG]	28-14			单/多芯线 Solid/Stranded [AWG]	28-14			单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	3.5			间距 Pitch [mm]	3.5			间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

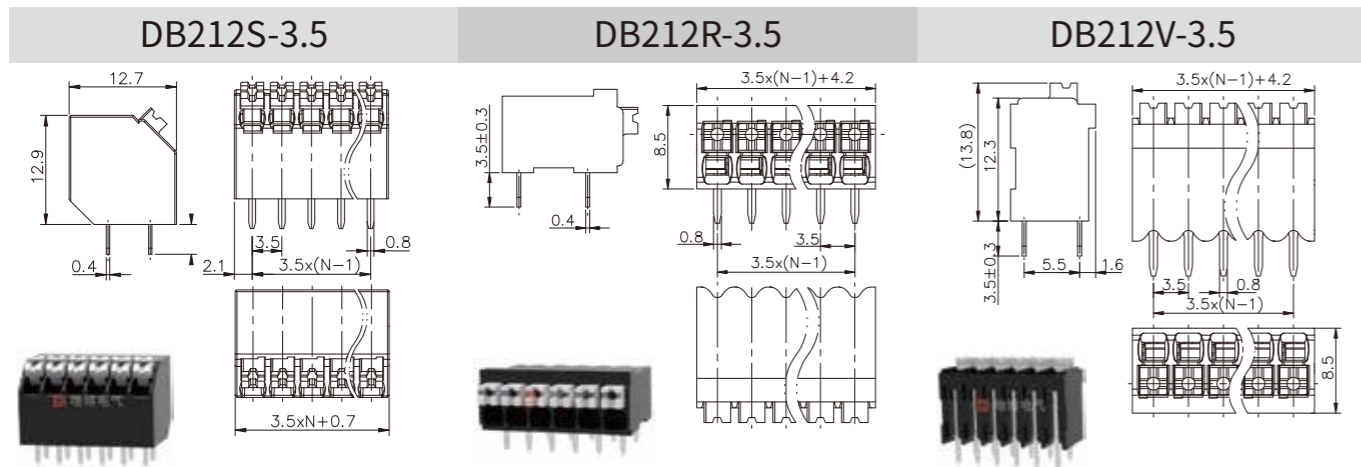


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10	额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	28-14			接线范围 Wire Range	24-14			接线范围 Wire Range	24-14		
单/多芯线 Solid/Stranded [AWG]	28-14			单/多芯线 Solid/Stranded [AWG]	24-14			单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	3.5			间距 Pitch [mm]	7.62			间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

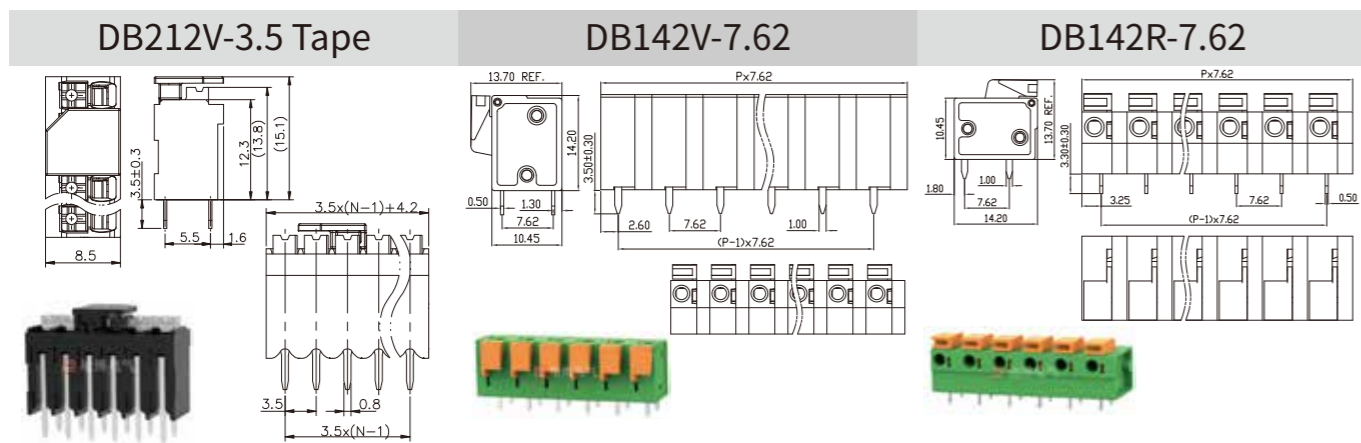


## 弹簧式端子台 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range	24-14			接线范围 Wire Range	24-14			接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-14			单/多芯线 Solid/Stranded [AWG]	24-14			单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.6		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

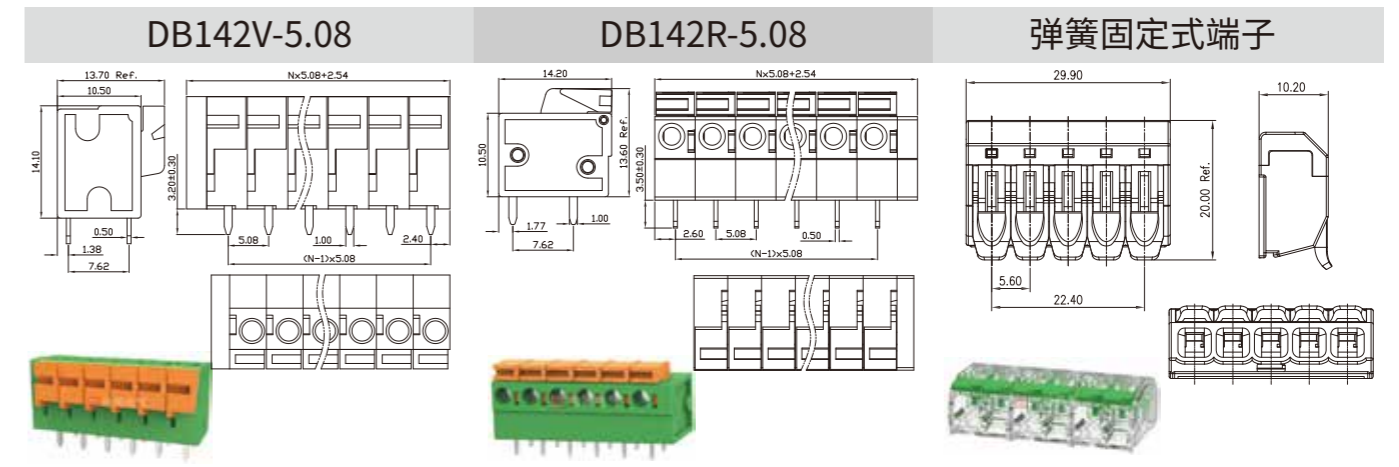


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300	额定电压 Rated Voltage [V]	600	-	300	额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	3	-	3	额定电流 Rated Current [A]	9	-	9	额定电流 Rated Current [A]	9	-	9
接线范围 Wire Range	26-22			接线范围 Wire Range	24-18			接线范围 Wire Range	24-18		
单/多芯线 Solid/Stranded [AWG]	26-22			单/多芯线 Solid/Stranded [AWG]	24-18			单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.0			间距 Pitch [mm]	4.0			间距 Pitch [mm]	4.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

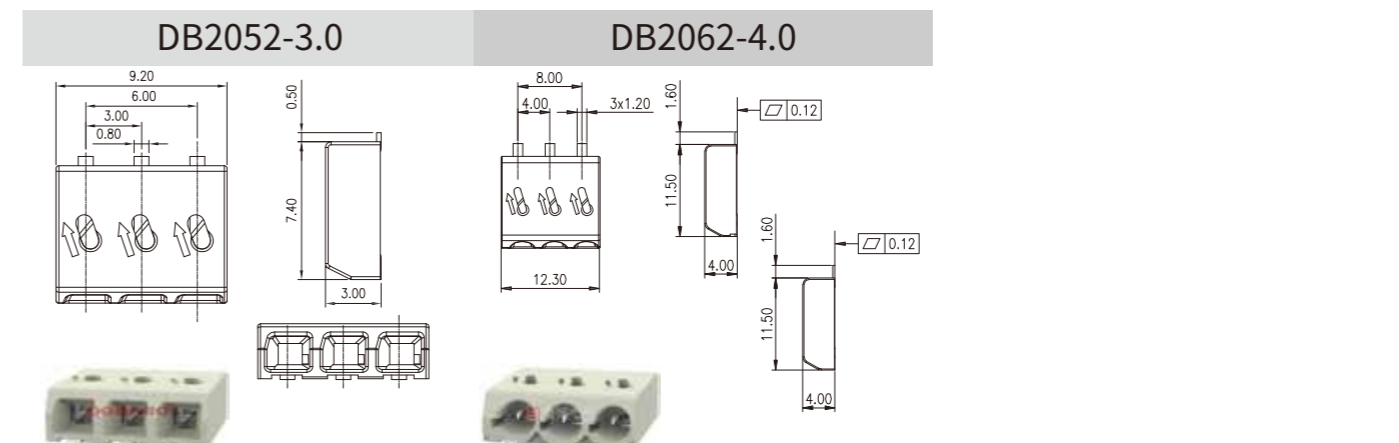

Feed-through terminal block

## 贯通式端子台

Convenient and reliable connection of two conductors, with a connection cross-section of 0.5mm<sup>2</sup> To 16mm<sup>2</sup> All types of wires, with or without fuses Two types of silk. The product design complies with international standards such as IEC60998 and UL1059. We have obtained CQC certification in China and UL certification in the United States.

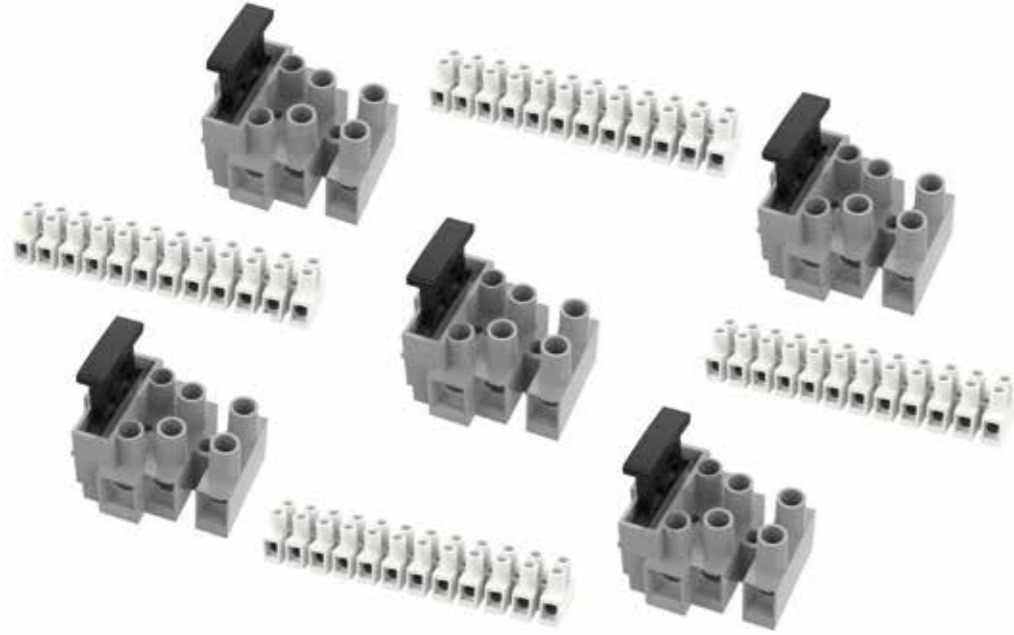

UL/CUL 技术参数 UL/CUL Technical Data	UL/CUL 技术参数 UL/CUL Technical Data	UL/CUL 技术参数 UL/CUL Technical Data
等级 Use Group	-	-
额定电压 Rated Voltage [V]	300	600
额定电流 Rated Current [A]	85	65
接线范围 Wire Range	16-4	14-8
单/多芯线 Solid/Stranded [AWG]	16-4	14-8
间距 Pitch [mm]	16.5	14.5
螺丝 Screw/扭矩 Torque(Max) [N.m]	M5/0.2	M4/1.2

DB18H-16.5	DB16H-14.5	DB14H-13.5

## 贯通式端子台 Feed-through terminal block

UL/CUL 技术参数 UL/CUL Technical Data	UL/CUL 技术参数 UL/CUL Technical Data	UL/CUL 技术参数 UL/CUL Technical Data
等级 Use Group	-	-
额定电压 Rated Voltage [V]	300	300
额定电流 Rated Current [A]	35	30
接线范围 Wire Range	22-10	22-10
单/多芯线 Solid/Stranded [AWG]	22-10	22-10
间距 Pitch [mm]	12.00	10.0
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.5/0.8	-

DB12H-12.0	DB10H-10.0	DB8H-8.2


UL/CUL 技术参数 UL/CUL Technical Data	UL/CUL 技术参数 UL/CUL Technical Data
等级 Use Group	-
额定电压 Rated Voltage [V]	300
额定电流 Rated Current [A]	15
接线范围 Wire Range	22-14
单/多芯线 Solid/Stranded [AWG]	22-14
间距 Pitch [mm]	10.0
螺丝 Screw/扭矩 Torque(Max) [N.m]	-

DB801-10.0

Rail terminal block

## 轨道式端子台

The rail mounted wiring terminal adopts spring clip or wire pressing frame clamping technology, which is convenient for wiring operation, seismic stability, and supports DIN rail installation. Meet 0.2-16 square meters Connect all types of wires to safely and reliably connect various electrical signals in the circuit. The product design and manufacturing standards have been merged through IEC/EN60947 Testing according to relevant standards such as UL1059

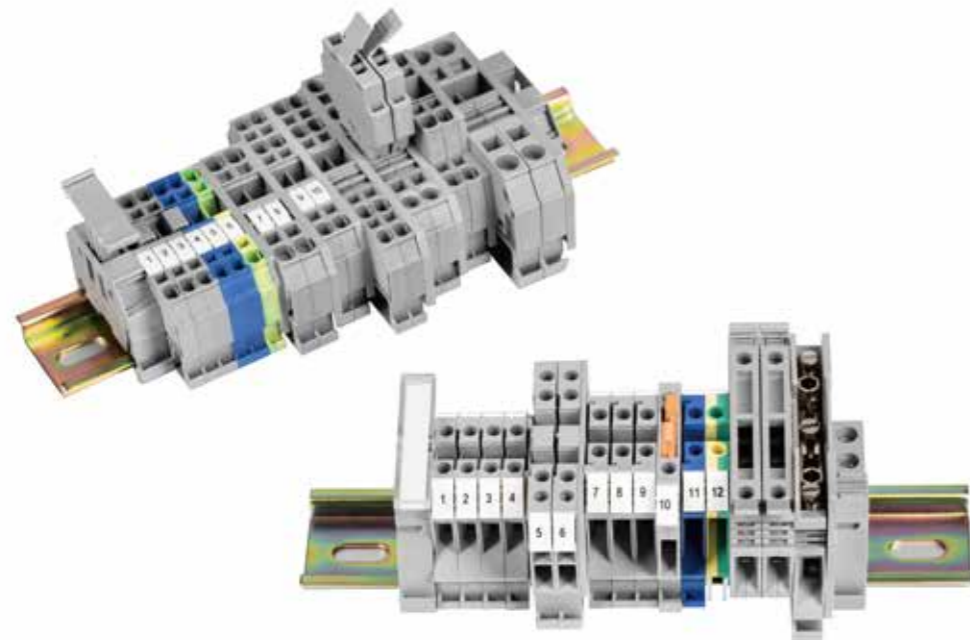

Wiring terminal block

## 布线式端子台

Wiring terminal block allow for direct insertion of single stranded wires, saving wiring time and cost. They are not only fast and easy to operate, but also suitable for various application fields Landscape, low space demand and high-density cabling. The wiring inside the control cabinet and junction box is clear at a glance, maintenance free installation, and permanent and safe connection.

