



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

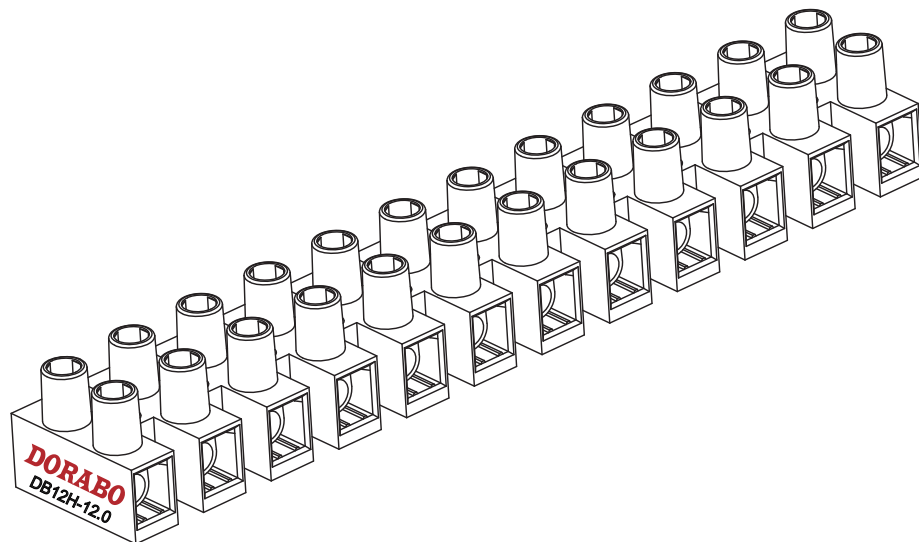

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 50A
- 2.Torque Value : M3.5 , 7.02Lb.in
- 3.Wire Range : 14~8AWG

IEC Standard

- 1.Rated Voltage/Current : 750V / 57A
- 2.Torque Value : M3.5 , 0.8N·m
- 3.Wire Range : 1.5~10mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 12.0mm, Poles : N=02~12P
- 3.Stripping length : 8mm
- 4.Withstanding Voltage : AC3000V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:


Pitch range in mm		Nominal dimension range in mm						0.1/10
TO	6	Over 6 TO 10	Over 10 TO 24	TO	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

7.RoHS Compliance

DB12H-12.0 - XXP - 1Y - 100A (H)

(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
100A-(Standard)

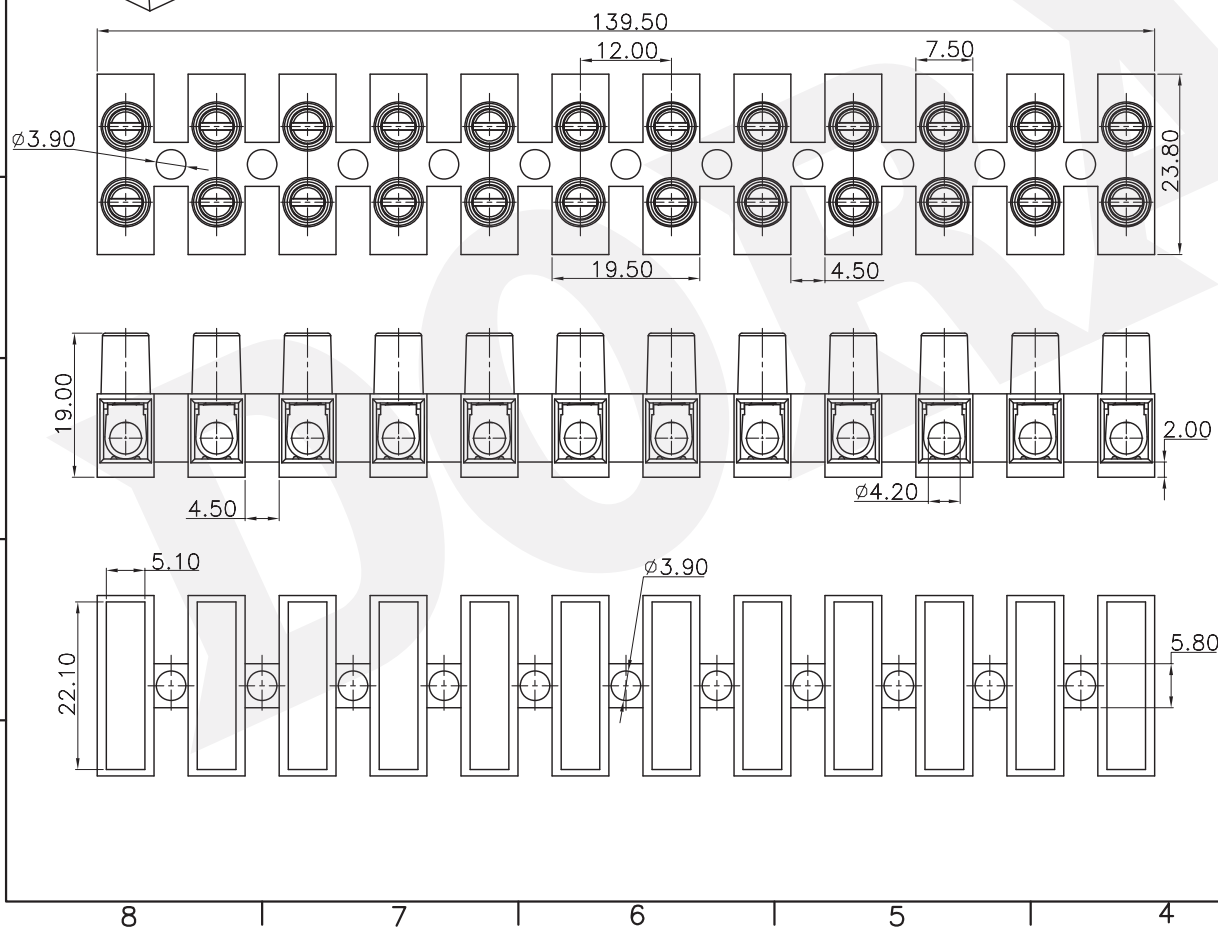

DETACHED LISTS	PART NO.: /		DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD: /		NAME: DB12H-12.0-XXP-1Y-00A(H)			
	CHKD: /					
	DRFT: /		TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
			DO NOT SCALE DRAWING	SCALE	1:1	