


PCB LAYOUT

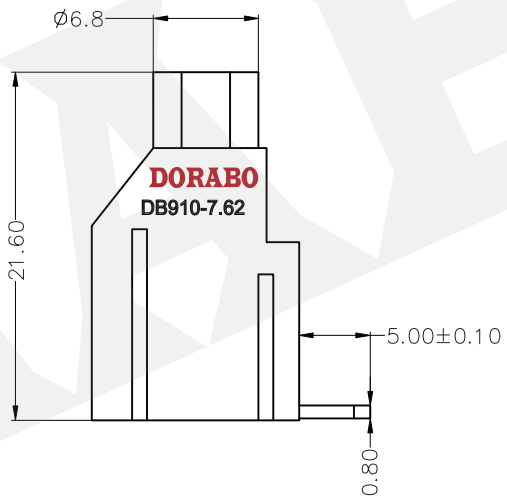

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

DB910R- 7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)
 (RoHS)
 00A-(Standard)

NOTES1:

- UL Standard
 - 1.Rated voltage/current : 300V / 30A
 - 2.Torque value : M3 , 4.43Lb.in
 - 3.Wire range : 26~10AWG
- IEC Standard
 - 1.Rated voltage/current : 450V / 24A
 - 2.Torque value : M3 , 0.5N·m
 - 3.Wire range : 1.5~4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.62mm, Poles : N=02~24P
- 3.Stripping length : 8mm
- 4.Withstanding voltage : AC2500V/1Min.
- 5.Operating temperature : -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm						- / □	
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	0.1/10
								<

7.RoHS Compliance

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION	/			
	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD				
	NAME: DB910R-7.62-XXP-1Y-00A(H)		REV	DO	
	TITLE: CUSTOMER DRAWING		SHEET	1/1	
	DRAWING NO.:		SCALE	1:1	
	MM (INCH)		DO NOT SCALE DRAWING		