

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:  
 UL Standard  
 1. Rated voltage/current : 300V / 30A  
 2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution Degree	2
Overtoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	32A

NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 7.62mm, Poles : N=02~12P  
 3. Operating temperature: -40°C~+105°C  
 4. Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm				0,1/10
Over	Over	Over	Over	Over	Over	
TO	TO	TO	TO	TO	TO	≤
6	10	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.30

5. RoHS Compliance

DB3ERM - 7.62 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

H  
G  
F  
E  
D  
C  
B  
A

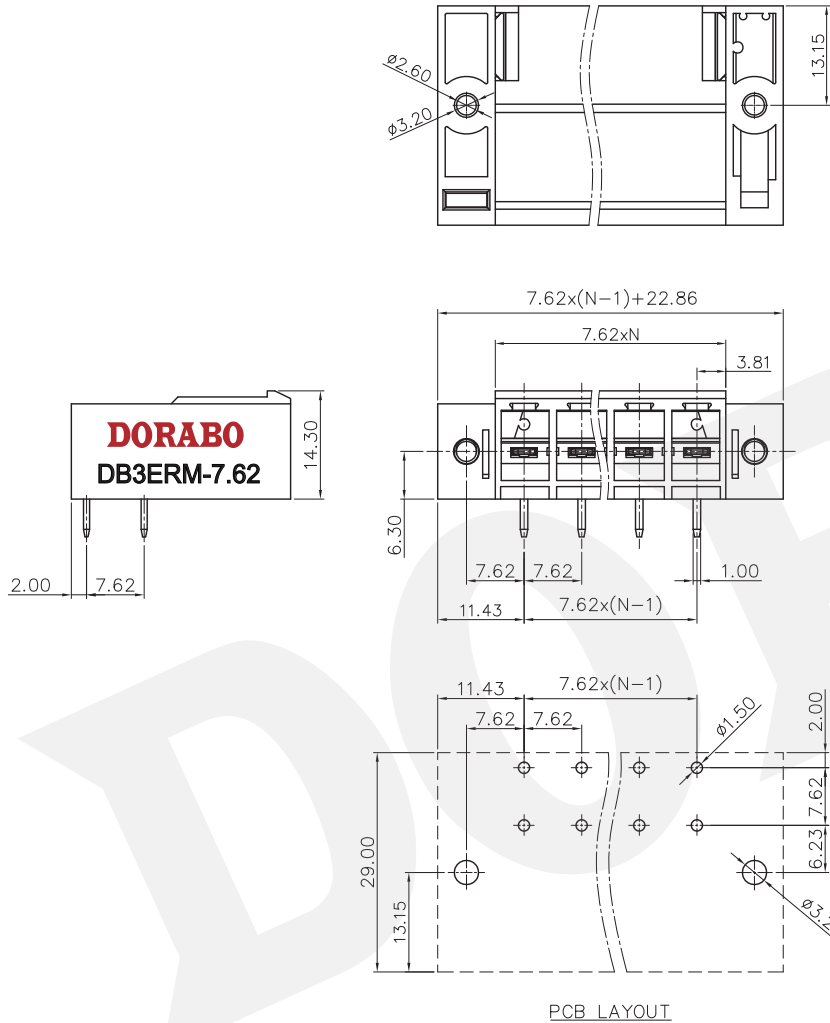

DETACHED LISTS	PART NO.:	/		
	APPD.:	/		
	CHKD.:	/		
	DRFT:	/		
	THIRD ANGLE PROJECTION	/		
	<b>DORABO</b>	慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD		
	NAME:	DB3ERM-7.62-XXP-1Y-00A(H)		
	TITLE:	CUSTOMER DRAWING	REV	DO
	DRAWING NO.:	/	SHEET	1/1
	MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1