

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A
2. Withstanding voltage : AC1300V/1Min.
3. Wire range : 28~20AWG

IEC Standard

1.	Pollution Degree	2	2	3
	Overtoltage Category	II	III	III
	Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
	Rate Voltage(V)	320V	160V	160V
	Rate Current(A)	3A		

2. Wire range : 0.2~0.5mm²

NOTES2:






1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 2.50mm, Poles : N=02~24P
3. Stripping length : 9~10mm
4. Operating temperature : -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				-	∩	∇
To	Over	To	Over	To	Over			
6	6	10	30	60	100			
10	10	24	30	60	150	0.1/10		
						<		
								±2'

6. RoHS Compliance

DB500R - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

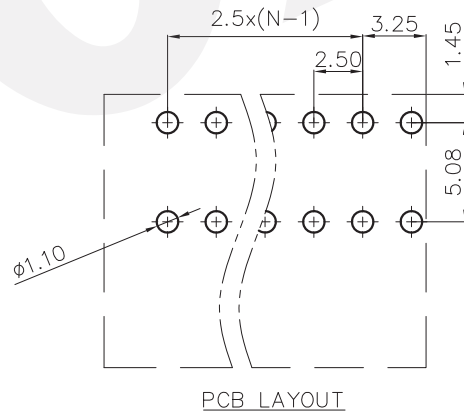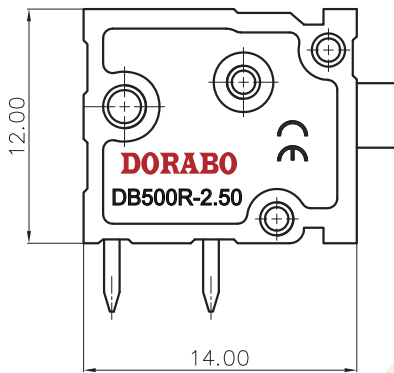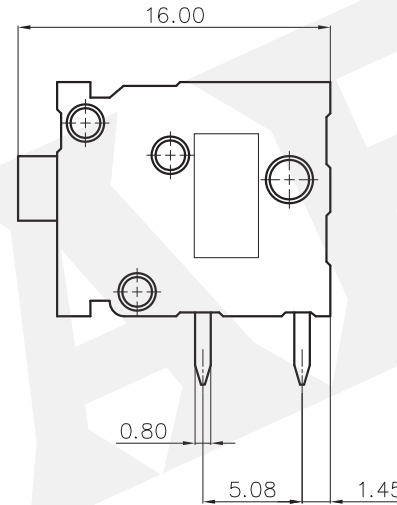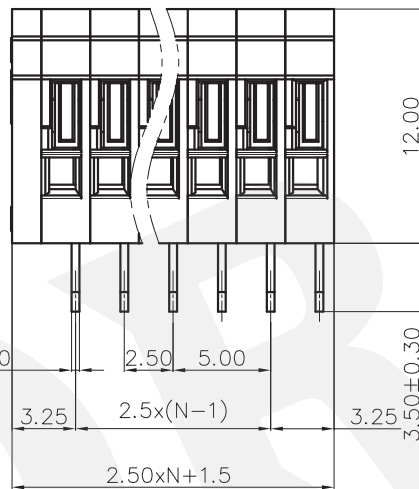

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
		DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
		NAME: DB500R-2.50-XXP-1Y-00A(H)			
		TITLE: CUSTOMER DRAWING		REV	DO
		DRAWING NO.:		SHEET	1/1
		MM (INCH)		SCALE	1:1
		DO NOT SCALE DRAWING			

