

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE






(W/O COVER)

NOTES1:
 UL Standard
 1. Rated voltage/current : 600V / 40A
 2. Torque value : M4 , 10.53Lb.in
 3. Wire range : 18~10AWG

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 13.00mm, Poles : N=02~20P
 3. Stripping length : 8~9mm
 4. Withstanding voltage : AC2200V/1Min
 5. Operating temperature : -40°C~+105°C
 6. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				∩	∠
TO	Over	TO	TO	TO	TO	0.1/10	
6	10	10	30	60	100		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2'

7. RoHS Compliance

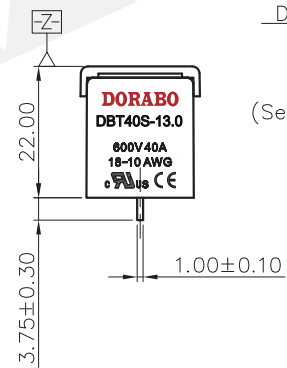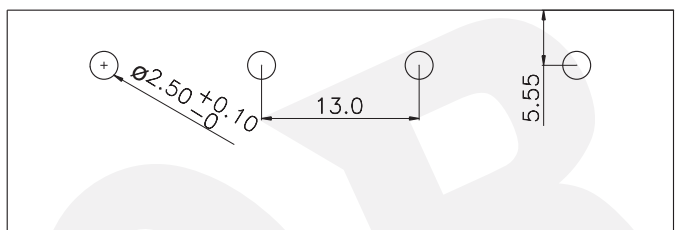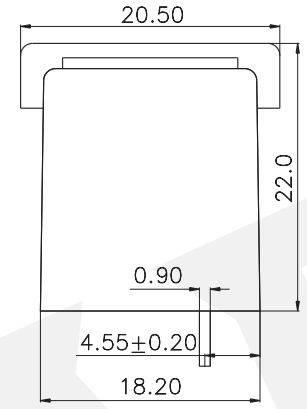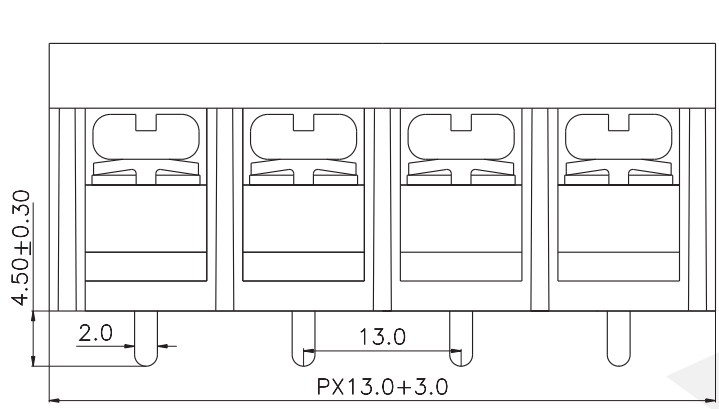

DBT40S-13.0 - XXP - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS	PART NO.:	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD:	NAME: DBT40S-13.0-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
	THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET 1/1
			SCALE	1:1	