REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

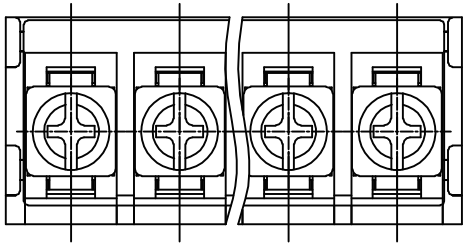

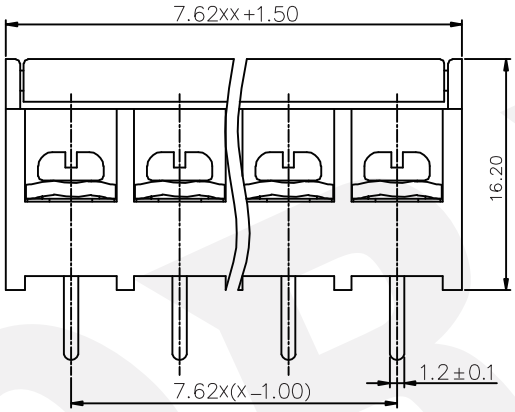



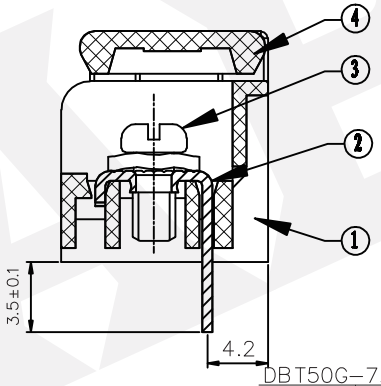

NOTES1:
UL Standard
1.Rated voltage/current : 300V / 20A
2.Torque value : M3 , 4.43Lb.in
3.Wire range : 22~12AWG

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 7.62mm, Poles : N=02~22P
3.Withstanding voltage : AC1600V/1Min
4.Operating temperature: -40°C~+105°C
5.Undimensioned tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					–	⌒	▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
								∠		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

6.RoHS Compliance

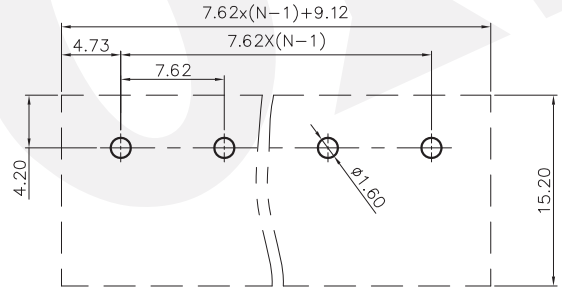

PCB LAYOUT

DBT50G-7.62- XXP - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS

PART NO.: /	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD		
APPD: /	NAME: DBT50G-7.62-XXP-1Y-00A(H)		
CHKD: /	TITLE: CUSTOMER DRAWING	REV	D0
DRFT: /	DRAWING NO.: /	SHEET	1/1
THIRD ANGLE PROJECTION	MM (INCH) DO NOT SCALE DRAWING	SCALE	1:1

DORABO