

DB116B-10.16-XXP-Y

升降式接线端子

DORABO®



固定式连接器

额定电流: 65 A

额定电压: 600 V

使用线径: 20-6 AWG

间距: 10.16 mm

安装: 波峰焊



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	600	600	600
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range [AWG]		20~6	
耐电压 Dielectric Voltage-Withstand		2.2KV	

技术参数-IEC

过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	630	1000	1000
额定电流 Rated Current [A]	57	57	57
额定冲击电压 Impulse withstand voltage [KV]	8	8	8
导线截面积[硬/柔] Conductor cross section [mm ²]		2.5~16	

材料 Material

DB116B-10.16-XXP-Y

升降式接线端子


DORABO®

绝缘材料 Insulation Material	PA66
阻燃等级 Flame retardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数 Pitch/Poles [mm]/[P]	10.16/2~16
剥线长度 Stripping Length [mm]	11-12
螺丝/扭矩 Screw/Torque(Max)[N.m]	M4/1.2
工作温度 Operating temperature [°C]	-40~+105
焊锡温度 Soldering temperature	260°C/5S
引针尺寸 Pin dimensions [mm]	1.0*1.0
PCB板孔径 PCB Hole Diameter [mm]	Ø1.7

尺寸图

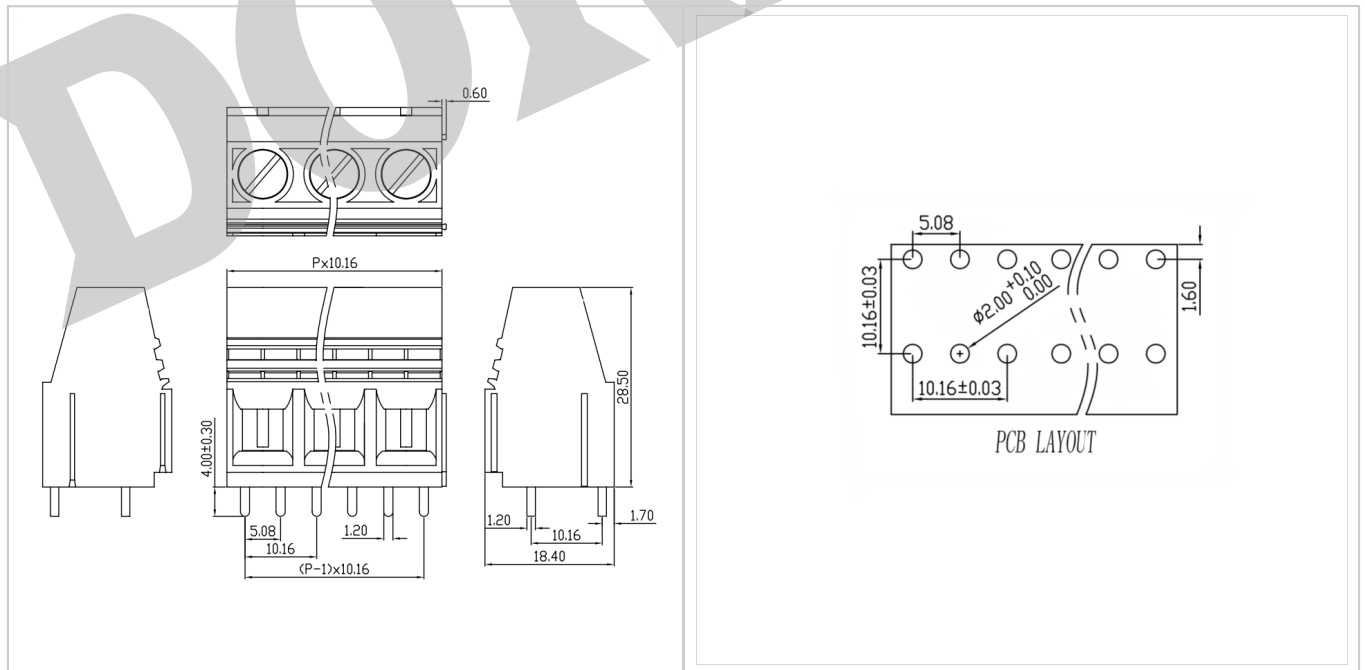

颜色Color/[Y] 1.(GN) 2.(BK) 3.(BU) 4.(CR) 5.(GY) 6.(OG) 7.(RD) 8.(WT) 9.(YL)