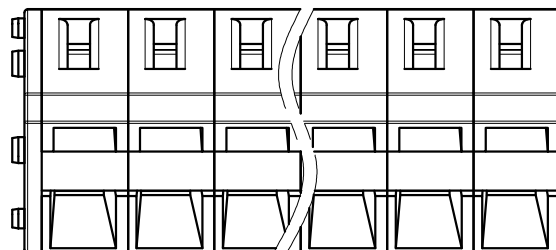
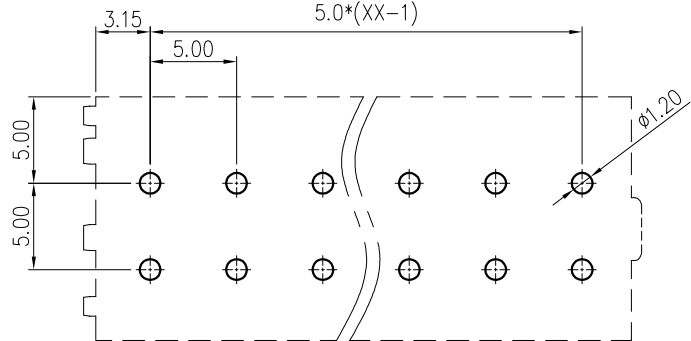





0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	$\frac{\Delta}{0.1/10}$
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500		$\frac{\Delta}{\pm 2^\circ}$
± 0.12	± 0.18	± 0.22	± 0.26	± 0.31	± 0.37	± 0.57	± 0.80	± 0.93	± 1.05	± 1.15	± 1.60	± 2.20	± 2.50	

$$5.0 \cdot (XX - 1)$$


DB245 — 5.0 — XXP — C — XXXX

(Series No.) (Pitch) (Poles) (Customer Request)

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

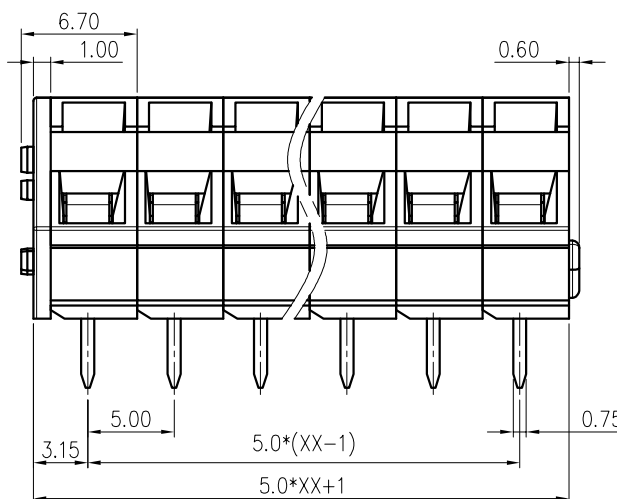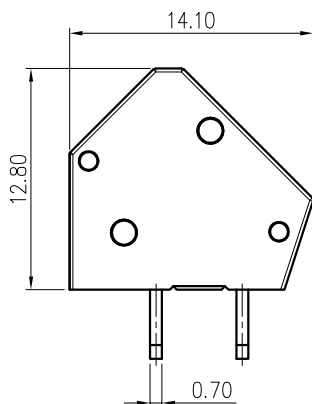

DORABO 宁波地博电气有限公司
NINGBO DORABO ELECTRICAL CO., LTD

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/17	400/17	630/17
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28~12/0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/XX=1~24P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MAT NO.: /		 宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD	
STATUS: /			
APPD: Steven Lu 2026.1.9		NAME: DB245-5.0-XXP-C	
CHKD: Jting Chen 2026.1.9			
DRFT: Tom Mao 2026.1.9		DRAWING NO.: /	
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 1:1	REV A
		SHEET	1/1