
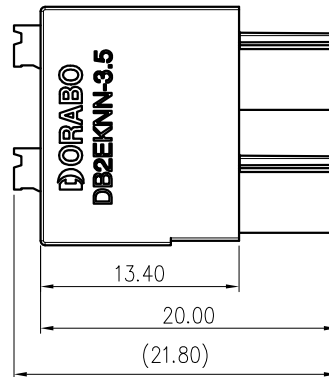


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
$\sim$ 3	$\sim$ 6	$\sim$ 10	$\sim$ 18	$\sim$ 30	$\sim$ 50	$\sim$ 80	$\sim$ 120	$\sim$ 180	$\sim$ 250	$\sim$ 315	$\sim$ 400	$\sim$ 500	
± 0.12	± 0.18	± 0.22	± 0.26	± 0.31	± 0.37	± 0.57	± 0.80	± 0.93	± 1.05	± 1.15	± 1.60	± 2.20	

$$\frac{0.1/10}{\angle \pm 2^\circ}$$

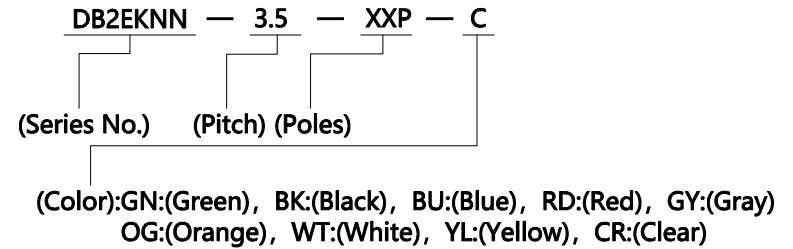

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category /污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	160/8	160/8	320/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	24~16/0.2~1.0,1.1,1.5		
间距/Pitch(mm)/线数范围/Poles	3.50/XX=04~48P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

Spring	Stainless steel	/
Conductor	Copper alloy	Sn Plated
Button	POM	UL94HB
Insulator	PA66	UL94V-0
NAME OF PART	MATERIAL	NOTES

MAT NO.: /		 DORABO 宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD	
STATUS: /			
APPD: Steven Lu 2025.11.19		NAME: DB2EKNN-3.5-XXP-C	
CHKD: Jting Chen 2025.11.19			
DRFT: Tom Mao 2025.11.19		DRAWING NO.: /	
 SIZE: A4	 (mm inch)	TYPE: CUSTOMER DRAWING	SCALE:
		SHEET	1/1