



CERTIFICATE OF PRODUCT CERTIFICATION

CERTIFICATE NO.: CQC21003315762

Valid from: Oct.11,2021

Valid until:long-term

NAME AND REGISTERED ADDRESS OF THE APPLICANT CIXI DORABO ELECTRONICS.,LTD
NO.828 CANGDA ROAD,CHANGHE TOWN,CIXI CITY,ZHEJIANG PROVINCE

NAME AND REGISTERED ADDRESS OF THE MANUFACTURER CIXI DORABO ELECTRONICS.,LTD
NO.828 CANGDA ROAD,CHANGHE TOWN,CIXI CITY,ZHEJIANG PROVINCE

NAME AND LOCATION OF THE FACTORY CIXI DORABO ELECTRONICS.,LTD
NO.828 CANGDA ROAD,CHANGHE TOWN,CIXI CITY,ZHEJIANG PROVINCE

PRODUCT NAME, MODEL AND SPECIFICATION Connecting device with screw-type clamping units
See appendix

THE STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS GB/T 13140.1-2008;GB/T 13140.2-2008

TYPE OF CERTIFICATION SCHEMES Type Testing of Product + Initial Factory Inspection + Follow up Factory Inspection

This is to certify that the above mentioned product(s) complies with the requirements of certification rules of CQC11-462195-2011.
The validity of the certificate is subject to positive result of the regular follow up inspection by issuing certification body.

The certificate information is available through the QR code below or CNCA's website: www.cnca.gov.cn



SIGNATURE:

谢肇煦



CHINA QUALITY CERTIFICATION CENTRE



CERTIFICATE OF PRODUCT CERTIFICATION

CERTIFICATE NO. : CQC21003315762

page 1 of 2

paper:

This certificate and attachments shall be used at the same time, and the verification instructions can be found in the main certificate.

序号	名称	电压 (V)	额定连接容 量 (AWG)	最高使用环境温度
1	DBT30ab-11.0-XXP 其中, XX=2~10, 为产品的位数; a=C/S/R/H, 代表导电件外形: 弯折针/直针/弯针/宽针; b=空白/M, 代表基座外形: 不带安装孔/带安装孔; 11.0 代表导电件之间的间距: 11.0mm;	300	22~10	T120
2	DBT30ab-c-XXP 其中, XX=2~12, 为产品的位数; a=C/S/R/H, 代表导电件外形: 弯折针/直针/弯针/宽针; b=空白/M, 代表基座外形: 不带安装孔/带安装孔; c=9.5/10.0, 代表导电件之间的间距: 9.5mm/10.0mm;	300	22~12	T120
3	DBT30ab-c-XXP 其中, XX=2~18, 为产品的位数; a=C/S/R/H, 代表导电件外形: 弯折针/直针/弯针/宽针; b=空白/M, 代表基座外形: 不带安装孔/带安装孔; c=7.62/8.25, 代表导电件之间的间距: 7.62mm/8.25mm;	300	22~14	T120
4	DBT50a-9.5-XXP 其中, XX=2~12, 为产品的位数; a=空白/G/B/P, 代表基座外形及针长: 不带盖板且短针/带 盖板且短针/不带盖板且长针/侧面带卯榫且长针; 9.5 代表导电件之间的间距: 9.5mm;	300	22~12	T120
5	DBT50a-b-XXP 其中, XX=2~12, 为产品的位数; a=空白/G, 代表基座外形: 不带盖板/带盖板; b=6.35/7.62/8.25/8.5, 代表导电件之间的间距: 6.35mm/7.62mm/8.25mm/8.5mm;	300	22~14	T120



CHINA QUALITY CERTIFICATION CENTRE



CERTIFICATE OF PRODUCT CERTIFICATION


CERTIFICATE NO. : CQC21003315762

page 2 of 2

paper:

This certificate and attachments shall be used at the same time, and the verification instructions can be found in the main certificate.

6	DBT50P-6.35-XXP 其中, XX=2~12, 为产品的位数; 第 1 个 P 代表基座两侧带卯榫, 可拼接; 6.35 代表代表导电件之间的间距为 6.35mm			
---	---	--	--	--

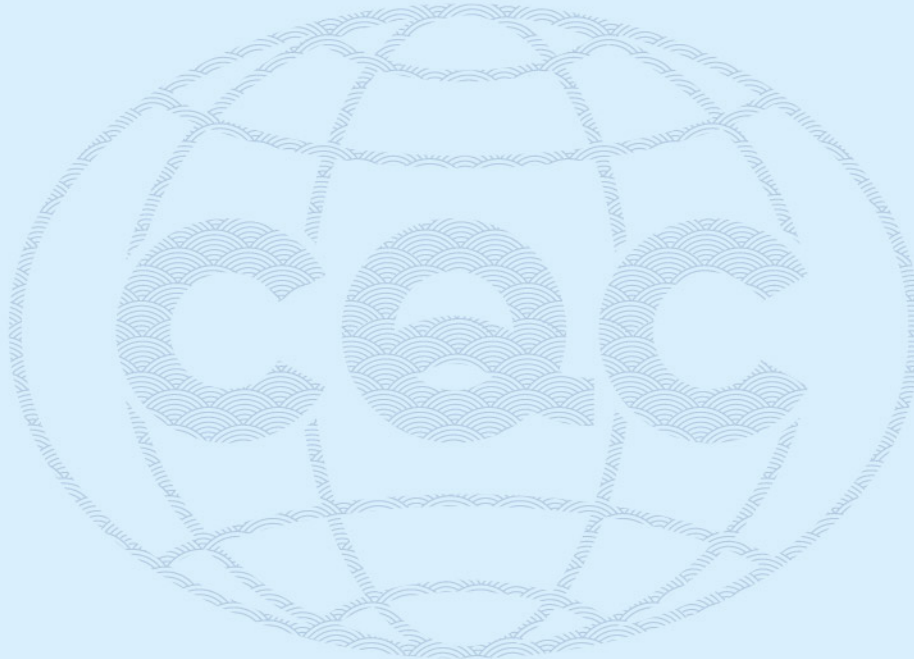

CHINA QUALITY CERTIFICATION CENTRE