


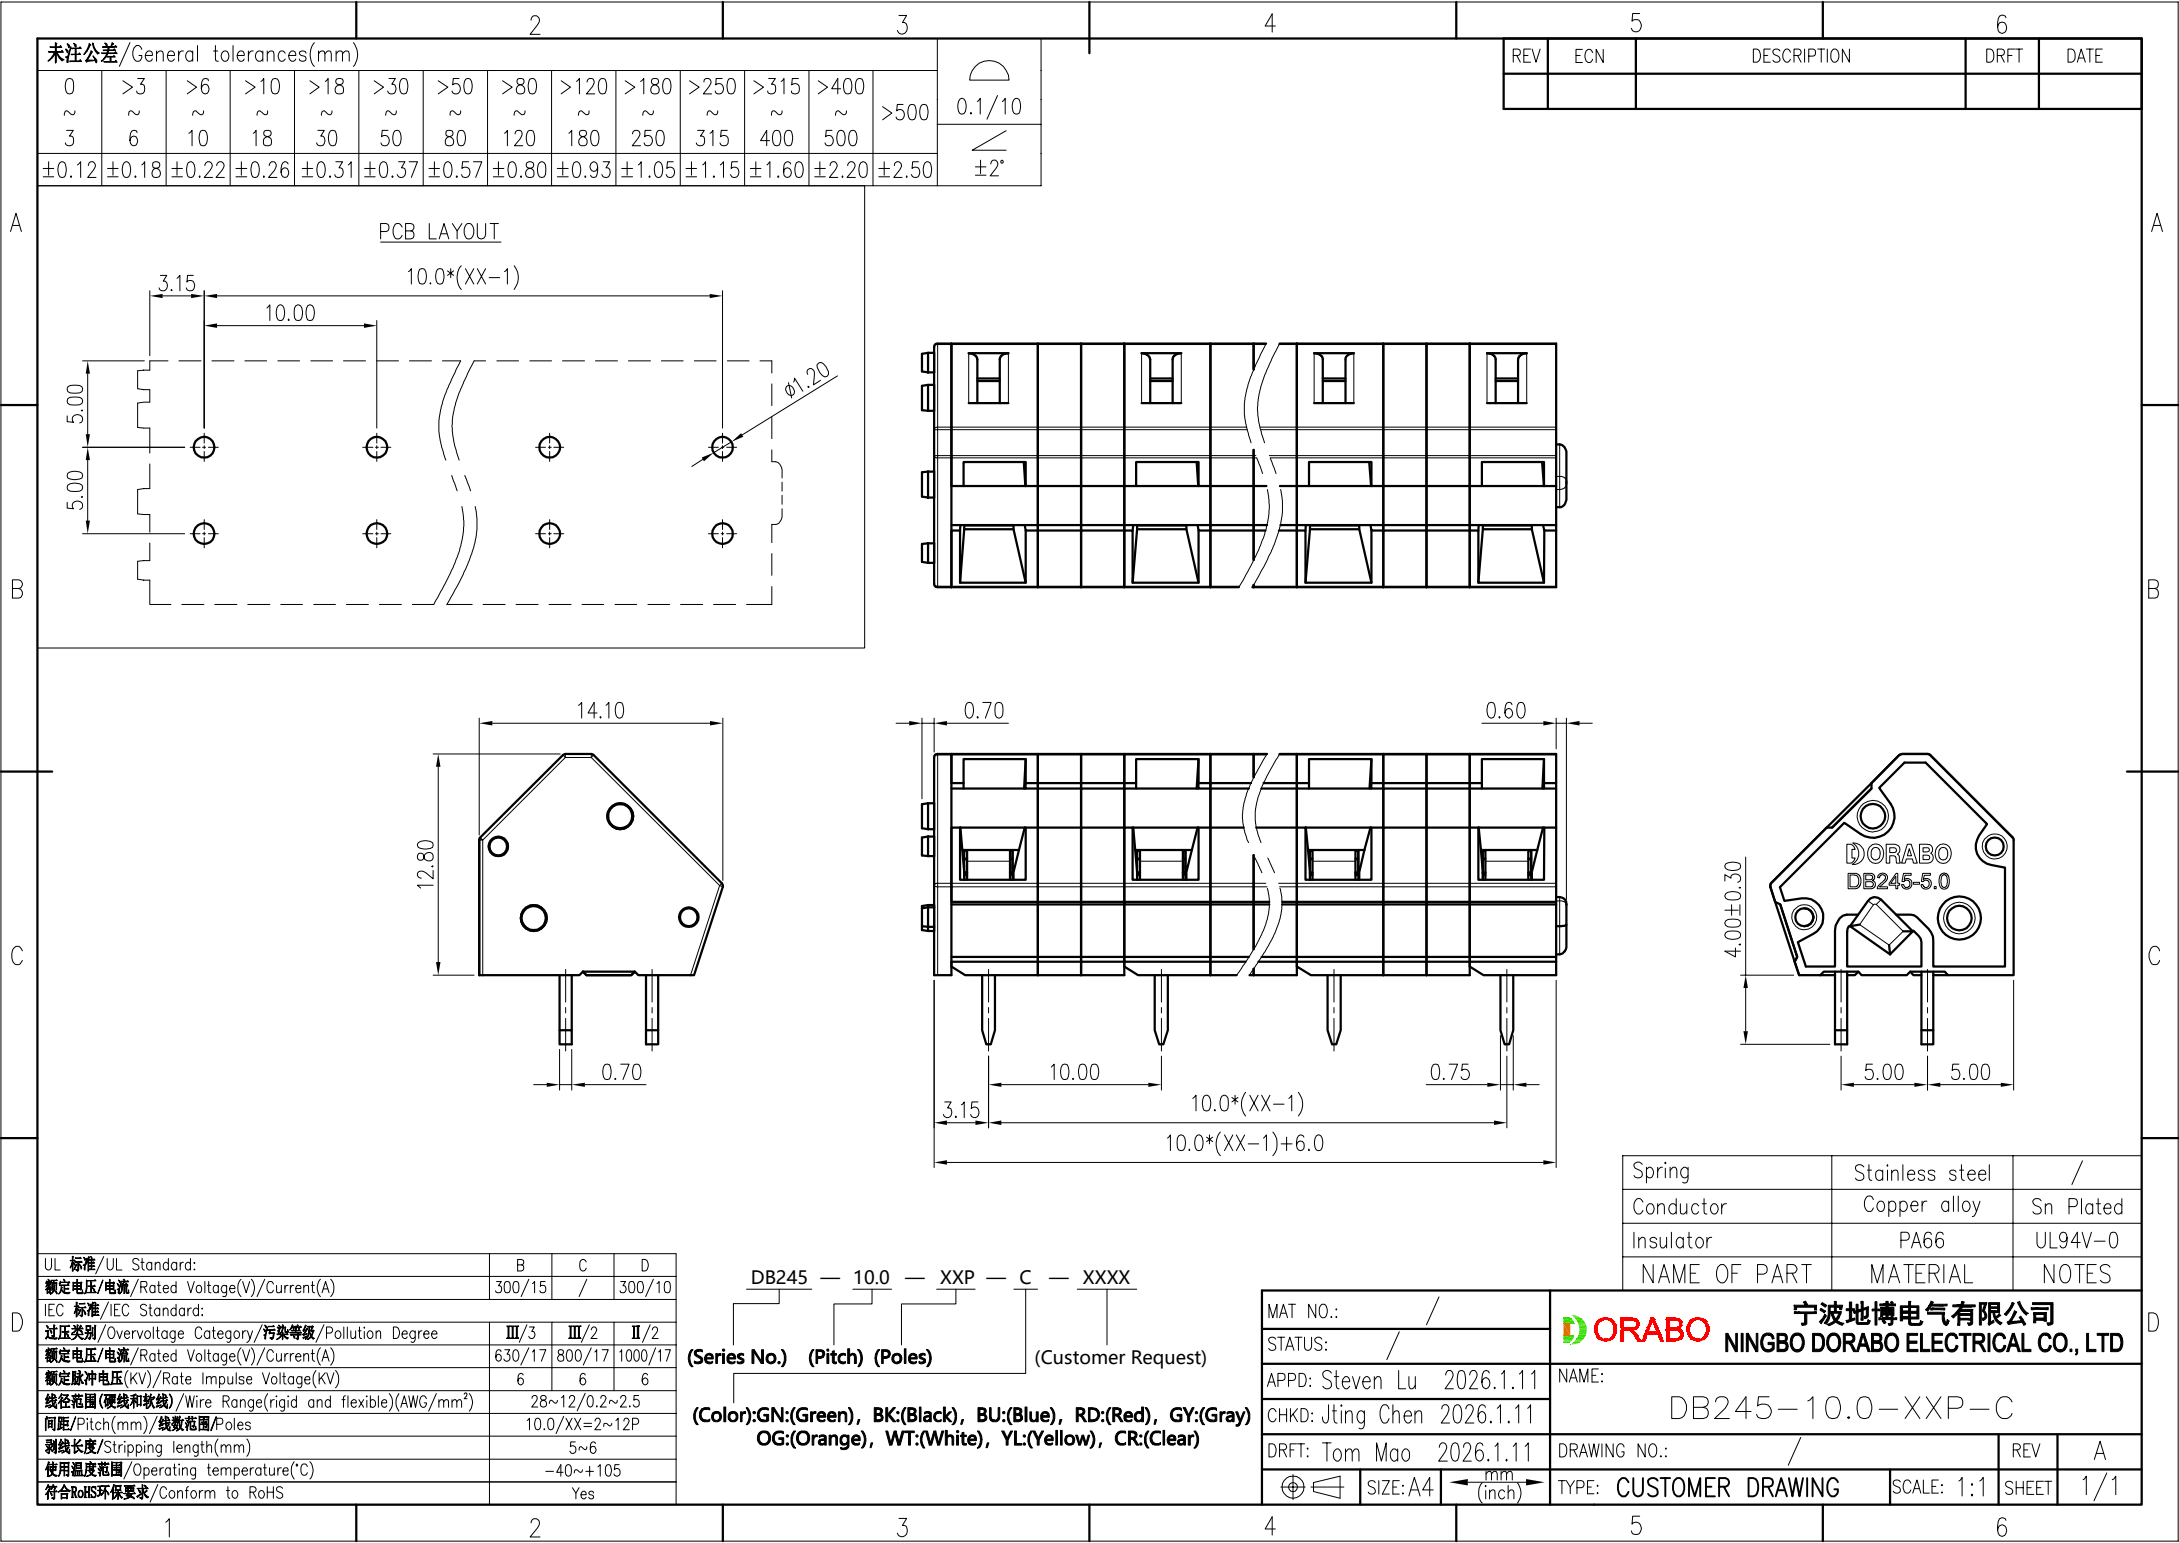

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

0.1/10
±2°

REV	ECN	DESCRIPTION	DRFT	DATE

PCB LAYOUT

10.0*(XX-1)

14.10

12.80

0.70

0.70

0.60

10.00

10.0*(XX-1)

10.0*(XX-1)+6.0

0.75

4.00±0.30

5.00

5.00

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	Ⅲ/3	Ⅲ/2	Ⅱ/2
额定电压/电流/Rated Voltage(V)/Current(A)	630/17	800/17	1000/17
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12/0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	10.0/XX=2~12P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DB245 — 10.0 — XXP — C — XXXX

(Series No.) (Pitch) (Poles) (Customer Request)

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

MAT NO.:	/	NINGBO DORABO ELECTRICAL CO., LTD		
STATUS:	/			
APPD: Steven Lu	2026.1.11	NAME: DB245-10.0-XXP-C		
CHKD: Jting Chen	2026.1.11			
DRFT: Tom Mao	2026.1.11	DRAWING NO.:		REV A
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING		SCALE: 1:1 SHEET 1/1

DORABO

宁波地博电气有限公司
NINGBO DORABO ELECTRICAL CO., LTD